

## NT 65/2 TACT<sup>2</sup>

The Kärcher Tact<sup>2</sup> systems are ever popular as specialist systems and as all-rounders thanks to their high level of mobility and excellent performance, their solid construction and their wide range of practical design features. The NT 65/2 Tact<sup>2</sup> is supplied with the entire antistatic package as standard. The system tackles even large amounts of fine dust.



**Order no.** 1.667-286.0

- Automatic Filter Cleaning System Tact<sup>2</sup>
- Anti-static system
- Adjustable push handle

### Technical data

<b>EAN code</b>		4039784714953
<b>Supply voltage</b>	<b>Ph / V / Hz</b>	1 / 220 - 240 / 50 - 60
<b>Air flow</b>	<b>l/s</b>	2 × 74
<b>Vacuum</b>	<b>mbar / kPa</b>	254 / 25.4
<b>Container content</b>	<b>l</b>	65
<b>Container material</b>		Plastic
<b>Rated input power</b>	<b>W</b>	max. 2760
<b>Standard nominal width</b>		ID 40
<b>Cable length</b>	<b>m</b>	10
<b>Sound pressure level</b>	<b>dB(A)</b>	73
<b>Weight without accessories</b>	<b>kg</b>	24.5
<b>Weight incl. packaging</b>	<b>kg</b>	31.3
<b>Dimensions (L × W × H)</b>	<b>mm</b>	575 × 490 × 880

### Equipment


<b>Suction hose</b>	<b>m</b>	4 / electrically conductive
<b>Suction tube</b>	<b>piece(s) × mm</b>	2 × 550 / Stainless steel
<b>Wet/dry floor nozzle</b>	<b>mm</b>	360
<b>Crevice nozzle</b>		■
<b>Drain hose (oil-resistant)</b>		■
<b>Automatic cut-out features at max. filling quality</b>		■
<b>Anti-static system</b>		■
<b>Flat pleated filter</b>		Paper
<b>Filter cleaning</b>		Automatic Filter Cleaning System Tact <sup>2</sup>
<b>Sturdy bumper</b>		■
<b>Push handle</b>		■
<b>Protection class</b>		I
<b>Stop swivel castor</b>		■

■ Included in the scope of supply.




### Easy to transport

- Adjustable push handle and large wheels make transport easy even on uneven surfaces.

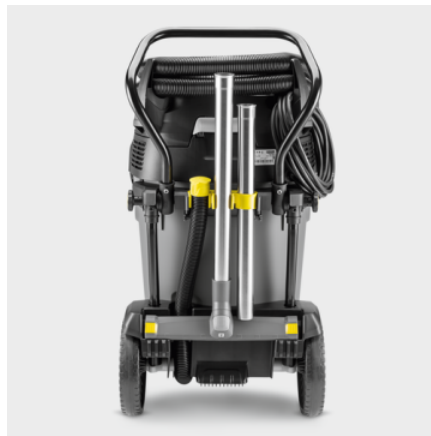

### Intelligent accessory storage

- For example, the floor nozzle can be quickly fixed any way round.

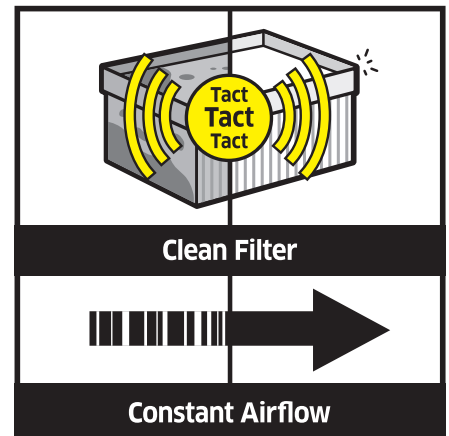

### Automatic Filter Cleaning System Tact<sup>2</sup>

- The flat pleated filter can be removed from the clean side; it is divided into two halves, which are cleaned alternately by targeted blasts of air.
- Fine dusts cannot block the filter. A constant high air flow is maintained.
- Over 1000 kg of category A fine dust can be vacuumed without the need to change the filter.

## ACCESSORIES FOR NT 65/2 TACT<sup>2</sup>

### 1.667-286.0



		Order no.	Description	
<b>FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M</b>				
<b>Flat pleated filter, paper</b>				
Flat pleated filter, paper	1	6.907-276.0	Flat pleated filter dust class M, nano-coated paper. Suitable for fine dust and dry dirt pick up.	■
<b>Flat pleated filter, PES</b>				
Flat pleated filter, PES	2	6.907-277.0	Flat pleated filter dust class M, rotproof PES fleece. Suitable for frequent wet pick up.	□
<b>Flat pleated filter, PTFE</b>				
Flat pleated filter, PTFE	3	6.907-449.0	Polyester fleece with PTFE coating, dust class M, for Tact <sup>2</sup> vacuum cleaners. Particularly suitable for very adhesive materials.	□
<b>BENDS</b>				
<b>Bend, plastic</b>				
Bend, NT, DN 40, plastic, electrically conductive, clip 2.0 at hose end, cone at accessory end	4	2.889-172.0	Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	■
Bend, NT, DN 35, plastic, clip 1.0 at hose end, cone at accessory end	5	5.031-718.0	DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
Bend, NT, DN 35, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end	6	5.031-939.0	Electrically conductive DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
Bend, NT, DN 40, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end	7	5.032-427.0	Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
<b>Bend, other</b>				
Bend, NT, DN 35, chrome-plated metal, cone at hose end, cone at accessory end	8	6.900-519.0	DN 35 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, NT, DN 35, stainless steel, cone at hose end, cone at accessory end	9	6.903-141.0	Robust DN 35 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, NT, DN 40, chrome-plated metal, cone at hose end, cone at accessory end	10	6.900-276.0	DN 40 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The robust bend has a cone connection at both the hose end and the accessory end.	□
Bend, NT, DN 40, stainless steel, cone at hose end, cone at accessory end	11	6.902-079.0	Robust DN 40 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
<b>SUCTION NOZZLES</b>				
<b>Floor nozzles</b>				
Wet/dry floor nozzle, advanced plastic, DN 40, width 360 mm	12	2.889-153.0	360 mm wide wet and dry floor nozzle with easy-to-change inserts, squeegees.	■
Wet/dry floor nozzle, standard plastic, DN 35	13	2.889-173.0	300 millimetre width, anthracite coloured wet/dry floor nozzle, NW 35. With easy-to-change inserts. Incl. brush strips and squeegees.	□
Wet/dry floor nozzle, standard plastic, DN 40	14	2.889-174.0	Standard floor nozzle, anthracite, in nominal diameter 40, with brush strips and squeegees. Suitable for all wet and dry applications.	□

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 65/2 TACT<sup>2</sup>

### 1.667-286.0



		Order no.	Description	
<b>SUCTION NOZZLES</b>				
<b>Floor nozzles</b>				
Wet and dry floor nozzle, aluminium, DN 40	15	6.903-018.0	All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
Wet/dry floor nozzle, aluminium, DN 40	16	6.906-383.0	All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
Wet/dry floor nozzle, aluminium, DN 35	17	6.906-384.0	All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
Wet/dry floor nozzle, advanced plastic, DN 40	18	2.889-117.0	The wet/dry floor nozzle (DN 40) permits a quick squeegee/brush change and is suitable for wet vacuum cleaning of large areas.	<input type="checkbox"/>
<b>Crevice nozzles</b>				
Crevice nozzle, NT, DN 40, plastic, 300 mm	19	5.130-655.0	Plastic crevice nozzle in nominal width DN 40 for Kärcher wet and dry vacuum cleaners. Especially suitable for vacuuming out areas that are difficult to reach, such as joints, crevices and corners.	<input checked="" type="checkbox"/>
Crevice nozzle, DN 35, plastic, 210 mm	20	2.889-130.0	Plastic crevice nozzle.	<input type="checkbox"/>
Crevice nozzle, NT, DN 35, metal, 500 mm long	21	6.900-922.0	The metal crevice nozzle (DN 35) enables vacuuming in crevices and corners. Length: 500 mm.	<input type="checkbox"/>
Crevice nozzle, NT, DN 40, metal, 400 mm	22	6.905-817.0	Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.	<input type="checkbox"/>
<b>All-purpose brushes</b>				
All-purpose brush	23	6.903-863.0	Natural bristles (ox hair), bristle element 120 × 45 mm.	<input type="checkbox"/>
<b>Car cleaning nozzles</b>				
Car nozzle, DN 40, 90 mm	24	6.900-952.0	For retrofitting older Kärcher wet and dry vacuum cleaner models with bends in DN 40: Flat angled, convenient, plastic car cleaning nozzle with a working width of approx. 90 mm.	<input type="checkbox"/>
	25	2.840-095.0	Flat angled, convenient, plastic, DN 40 car cleaning nozzle specially designed for new Kärcher wet and dry vacuum cleaners with a clip system at the suction hose. Working width: Approx. 90 mm.	<input type="checkbox"/>
<b>Rubber suction tools, nose 45°</b>				
Rubber suction tool, nose 45°	26	6.902-104.0	45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	<input type="checkbox"/>
NT rubber suction nozzle, bevelled at 45°, DN 40	27	6.902-105.0	45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	<input type="checkbox"/>
<b>Pipe dusting nozzles</b>				
Pipe brush 35/100	28	6.903-035.0	Plastic, pipe diameter 100 mm	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 65/2 TACT<sup>2</sup>

### 1.667-286.0



	Order no.	Description	
<b>SUCTION NOZZLES</b>			
<b>Pipe dusting nozzles</b>			
Pipe brush 35/200	29	6.903-036.0 Plastic, pipe diameter 200 mm	<input type="checkbox"/>
<b>SUCTION TUBES</b>			
<b>Suction tubes, stainless steel</b>			
Suction tube, 2 x, NT, DN 40, 550 mm long, stainless steel, suitable for: NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 75/2	30	2.889-194.0 The suction tube set consists of 2 suction tubes made of high-quality stainless steel (DN 40 and 550 mm long each). For Kärcher wet and dry vacuum cleaners.	<input checked="" type="checkbox"/>
Suction tube, DN 35, 505 mm, stainless steel	31	6.902-154.0 Suction tube made of high-quality stainless steel in DN 35 and 505 mm long for wet and dry vacuum cleaners from Kärcher.	<input type="checkbox"/>
Suction tube, NT, DN 40, 550 mm long, stainless steel, suitable for: AP 100/50, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV	32	6.902-081.0 Suction tube made of high-quality stainless steel in nominal width DN 40 and 550 mm long for wet and dry vacuum cleaners from Kärcher.	<input type="checkbox"/>
Suction tube, NT, DN 40, 1000 mm long, stainless steel, suitable for: NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV	33	6.906-531.0 The suction tube made of high-quality stainless steel (DN 40 and 1000 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	<input type="checkbox"/>
<b>Suction tubes, metal</b>			
Suction tube, 2 x, NT, DN 35, 550 mm long, chrome-plated steel, suitable for: NT 27/1, NT 30/1, NT 40/1, NT 50/1, NT 55/1, NT 65/2, NT 75/2	34	2.889-191.0 The suction tube set consists of 2 chrome-plated steel suction tubes for Kärcher wet and dry vacuum cleaners, nominal width DN 35 and each suction tube is 550 mm long.	<input type="checkbox"/>
Suction tube, NT, DN 35, 505 mm long, chrome-plated steel, suitable for: NT 25/1, NT 27/1, NT 30/1, NT 35/1, NT 40/1, NT 48/1, NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/1, NT 75/2, NT 611, NT 802 IV	35	6.900-514.0 The suction tube made of chrome-plated steel (DN 35, 505 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	<input type="checkbox"/>
<b>SUCTION HOSES</b>			
<b>Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)</b>			
Suction hose, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0	36	6.906-321.0 The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	<input checked="" type="checkbox"/>
Repair kit for suction hoses DN 40 Clip 1.0	37	2.639-873.0 Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	<input type="checkbox"/>
Extension hose, NT, DN 40, length 2.5 m, clip 1.0, connecting adapter	38	6.906-344.0 The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose with bend, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0	39	4.440-678.0 The suction hose with bend in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 40, length 10 m, clip 1.0, bayonet 1.0	40	6.906-279.0 The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 40, length 4 m, oil-resistant, clip 1.0, bayonet 1.0	41	6.906-714.0 The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose with bend and PFC module, NT, DN 40, length 4 m, electrically conductive, clip 1.0, bayonet 1.0	42	4.440-728.0 The electrically conductive suction hose with bend and PFC module in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 65/2 TACT<sup>2</sup>

### 1.667-286.0



	Order no.	Description	
<b>SUCTION HOSES</b>			
<b>Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)</b>			
Suction hose, NT, DN 40, length 16 m, clip 1.0, bayonet 1.0	43	6.906-635.0	The suction hose in nominal width DN 40 and with 16 m length is suitable for use with wet and dry vacuum cleaners. <input type="checkbox"/>
Suction hose, NT, DN 40, length 10 m, electrically conductive, clip 1.0, bayonet 1.0	44	6.906-877.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners. <input type="checkbox"/>
<b>Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)</b>			
Suction hose, NT, DN 40, length 4 m, electrically conductive, clip 2.0, bayonet 2.0	45	2.889-141.0	The electrically conductive suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners. <input checked="" type="checkbox"/>
Suction hose, NT, DN 35, length 4 m, electrically conductive, clip 2.0, bayonet 2.0	46	2.889-137.0	The electrically conductive suction hose in nominal width DN 35 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>
Suction hose, NT, DN 40, length 4 m, clip 2.0, bayonet 2.0	47	2.889-138.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners. <input type="checkbox"/>
Suction hose, NT, DN 40, length 2.5 m, clip 2.0, bayonet 2.0	48	2.889-139.0	The suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>
Suction hose, NT, DN 40, length 4 m, oil-resistant, clip 2.0, bayonet 2.0	49	2.889-140.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>
Suction hose, NT, DN 40, length 2.5 m, electrically conductive, clip 2.0, bayonet 2.0	50	2.889-142.0	The electrically conductive suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners. <input type="checkbox"/>
Extension hose, NT, DN 40, length 2.5 m, clip 2.0, connecting adapter	51	2.889-146.0	The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>
Repair kit for suction hoses DN 40, Clip 2.0	52	2.889-150.0	Repair kit ID 40 for the new clip system. <input type="checkbox"/>
<b>Hose connection</b>			
Adapter, ID 32/35, with internal thread	53	6.902-077.0	Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35. <input type="checkbox"/>
Connecting adapter, ID 40, with internal thread	54	6.900-286.0	Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors. <input type="checkbox"/>
<b>Suction hoses with cone connection</b>			
Suction hose, NT, DN 40, length 4 m, cone, bayonet 1.0	55	4.440-263.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners. <input type="checkbox"/>
Suction hose, NT, DN 40, length 4 m, oil-resistant, cone, bayonet 1.0	56	4.440-303.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners. <input type="checkbox"/>

■ Included in the scope of supply.  Available accessories.

## ACCESSORIES FOR NT 65/2 TACT<sup>2</sup>

### 1.667-286.0



	Order no.	Description		
<b>SUCTION HOSES</b>				
<b>Suction hoses with cone connection</b>				
Suction hose, NT, DN 40, length 10 m, cone, bayonet 1.0	57	4.440-463.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 40, length 10 m, electrically conductive, cone, bayonet 1.0	58	4.440-466.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 40, length 10 m, oil-resistant, cone, bayonet 1.0	59	4.440-612.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 50, length 4 m, cone, bayonet 1.0	60	4.440-264.0	The suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 50, length 3 m, cone, bayonet 1.0	61	4.440-328.0	The suction hose in nominal width DN 50 and with 3 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 50, length 10 m, cone, bayonet 1.0	62	4.440-467.0	The suction hose in nominal width DN 50 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 50, length 4 m, oil-resistant, cone, bayonet 1.0	63	4.440-613.0	The oil-resistant suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
Suction hose, NT, DN 50, length 4 m, electrically conductive, cone, bayonet 1.0	64	4.440-616.0	The electrically conductive suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	<input type="checkbox"/>
<b>FILTER BAGS</b>				
<b>Fleece filter bags</b>				
Fleece filter bags, 5 × , NT 65, NT 70, NT 72, NT 75	65	2.885-753.0	Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	<input type="checkbox"/>
<b>Paper filter bags</b>				
Paper filter bags, 5 × , NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC	66	6.904-285.0	Premium 3-layer paper filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	<input type="checkbox"/>
<b>FILTER T/ NT</b>				
<b>Flat pleated filter HEPA, dust class H</b>				
HEPA-14 flat pleated filter	67	6.904-364.0	For Kärcher wet and dry vacuum cleaners: HEPA-14 (H14) flat pleated filter. Suitable for vacuuming hazardous dusts, coarse dirt and liquids.	<input type="checkbox"/>
<b>Wet filter bag</b>				
Wet filter bag	68	6.904-252.0	Approved for dust class L, general cleaning, wet and dry, tear-resistant.	<input type="checkbox"/>
<b>Plastic sacks for dust-free disposal</b>				
Plastic bag for dust-free disposal, 10 × , NT 65, NT 70, NT 72, NT 75, NT 602, NT 700, NT 702	69	6.900-698.0	PE plastic sack.	<input type="checkbox"/>
<b>Fabric filter</b>				
Candle filter Wood, NT 65/2, NT 75/2	70	2.414-003.0	Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust with the NT 65/2 and 75/2 twin-motor Tact vacuums.	<input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR NT 65/2 TACT<sup>2</sup>

### 1.667-286.0



		Order no.	Description	
<b>FILTER T/ NT</b>				
<b>Fabric filter</b>				
Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993	71	6.904-282.0	Polyester needle fleece membrane/fabric filter - BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.	<input type="checkbox"/>
<b>CONNECTING SLEEVES</b>				
<b>Y-adapter kit</b>				
Y-adapter kit	72	2.637-217.0	Plastic distributor - suitable for NT vacuum cleaners.	<input type="checkbox"/>
<b>Connection adapter C ID (clip to cone)</b>				
Adapter clip DN 35 on cone DN 35	73	5.407-005.0	Adapter clip system DN 35 for connecting suction tubes and small nozzles to cone DN 35. Perfect for vehicle interior cleaning, even without the connection of other nozzles.	<input type="checkbox"/>
Adapter clip DN 40 to cone DN 40	74	5.407-006.0	For connecting small nozzles and suction tubes with cone DN 40: Adapter clip system DN 40. Ideal for vehicle interior cleaning tasks, with no need to connect additional nozzles.	<input type="checkbox"/>
Connection adapter C DN 35	75	5.407-112.0	C 35 hose connector for DN 35 accessory, electrically conductive.	<input type="checkbox"/>
Electrically conductive DN 40 connection adapter for DN 35 accessories	76	5.407-109.0	Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
Connection adapter C DN 40	77	5.407-111.0	C 40 hose connector for DN 40 accessory, electrically conductive.	<input type="checkbox"/>
<b>Connection adapter for power tools, clip connection</b>				
Power tool connection adapter, DN 26-36, electrically conductive	78	5.453-042.0	3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
Connection adapter for power tools, C 35, electrically conductive	79	5.453-048.0	Inside Ø 25.4 mm, outside Ø 34.6 mm/ 38 mm, electrically conductive. Only NT vacuums.	<input type="checkbox"/>
	80	5.453-050.0	Inside Ø 27 mm, outside Ø 36.5 mm/38.8 mm, electrically conductive. Only NT vacuums.	<input type="checkbox"/>
<b>Adapter for electric power tools, screwable</b>				
Adapter for electric power tools, screwable, ID 35	81	5.453-016.0	3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.	<input type="checkbox"/>
	82	5.453-026.0	Inside Ø 28.6 mm, outside Ø 37.3/38.8 mm.	<input type="checkbox"/>
	83	6.902-059.0	Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.	<input type="checkbox"/>
	84	6.902-095.0	2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.	<input type="checkbox"/>

Available accessories.



## ACCESSORIES FOR NT 65/2 TACT<sup>2</sup>

### 1.667-286.0



		Order no.	Description	
<b>CONNECTING SLEEVES</b>				
<b>Reducing sleeves</b>				
NT reducer from DN 40 to DN 35, electrically conductive	85	5.407-108.0	Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
Reducer adapter from DN 40 to DN 35	86	6.902-017.0	Reducer, enabling accessories (upholstery nozzle, crevice nozzle, etc.) with a DN 35 connection adapter to be connected to accessory parts (bend or suction tube) that have a DN 40 connection adapter.	<input type="checkbox"/>
NT reduction bushing with clip system for DN 40 suction hoses on accessory DN 35	87	5.407-113.0	Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system.	<input type="checkbox"/>
Reducer from ID 35 to ID 32	88	6.902-072.0	Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.	<input type="checkbox"/>
<b>Reduction/expansion adapter kit</b>				
Set of reducers / adapter sleeves	89	2.860-117.0	DN 40/35, DN 35/32 (tube -> nozzle), plastic.	<input type="checkbox"/>
<b>TARGET-GROUP-SPECIFIC ACCESSORY KITS FOR VACUUM CLEANERS</b>				
Wet and dry vacuuming kit, ID 40, electrically conductive	90	2.638-147.0	Electrically conductive wet and dry accessory kit in nominal size DN 40 for Kärcher vacuum cleaners. The suction kit comprises a suction hose, a bend, a floor nozzle, a crevice nozzle and two suction tubes.	<input type="checkbox"/>
Car cleaning accessory kit	91	2.862-166.0	Vehicle interior cleaning accessory kit in nominal width DN 35 for Kärcher wet and dry vacuum cleaners. The kit comprises various nozzles and adapter pieces in nominal widths DN 35 and DN 40.	<input type="checkbox"/>
<b>OTHER ACCESSORIES NT</b>				
Cyclone preseparator CS 40 Me	92	2.863-026.0	The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.	<input type="checkbox"/>
Adapter for NT hoses with bayonet connection 1.0	93	5.031-436.0	Electroconductive adapter for connecting NT hoses with bayonet 1.0 connection of nominal widths DN 35, 40, 50 to the new accessory system for wet and dry vacuum cleaners from Kärcher.	<input type="checkbox"/>
<b>MODIFICATION KIT, NON-CONDUCTIVE MEDIA</b>				
Attachment kit, non-conductive media Tact <sup>2</sup> + Ap	94	2.642-602.0	For switching off when vacuuming non-conductive fluids such as oils and greases	<input type="checkbox"/>
<b>OTHER ACCESSORIES SCRUBBER DRIERS</b>				
<b>Miscellaneous</b>				
Extension cable	95	6.647-022.0	Extension cable, 20 m, 3x1.5 mm <sup>2</sup> . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.	<input type="checkbox"/>
<b>EMPTYING SUPPORTS</b>				
<b>Strainer baskets</b>				
Sieve basket IVC	96	5.731-645.0	Plastic swarf sieve, perforated, with internal thread. For protecting the drain hose against very abrasive suction material such as coarse shavings.	<input type="checkbox"/>

Available accessories.