


Elegant Keypad


Models: RPKELP, RPKEL






Installation Guide

<p>EN</p> <p>Compatible with RISCO Group's wired and hybrid intrusion systems, the Elegant Keypad is a slim, sensitive and reliable keypad which is responsive to touch.</p> <p>For the Elegant Keypad User Guide, refer to our website at: http://www.riscogroup.com/support/downloads.</p>	<p>IT</p> <p>La tastiera Elegant è un sottile e stilizzato dispositivo di comando con una serie di tasti numerici e di funzione sensibili al tocco. La tastiera è compatibile con tutti i Sistemi antintrusione di RISCO, sia cablati che ibridi.</p> <p>Per la Guida Utente del prodotto fare riferimento alla documentazione presente nel nostro sito web http://www.riscogroup.com/italy/support/downloads.</p>
<p>ES</p> <p>Compatible con sistemas de intrusión cableados e híbridos de RISCO, el teclado Elegant es un teclado táctil, esbelto, sensible y fiable.</p> <p>Para obtener la Guía de usuario, visite nuestra web: http://www.riscogroup.com/support/downloads.</p>	<p>FR</p> <p>Compatible avec les systèmes d'intrusion filaires et hybrides de RISCO Group, le clavier 'Elégant' est un clavier tactile mince, sensible et fiable.</p> <p>Pour obtenir le Guide Utilisateur du clavier 'Elégant', reportez-vous à notre site Web: http://www.riscogroup.com/support/downloads.</p>
<p>NL</p> <p>Compatibel met RISCO Groups bedrade en hybride inbraaksystemen, is het Elegant keypad een slank, receptief en betrouwbaar keypad dat reageert via aanraking.</p> <p>Voor de Elegant Keypad gebruikershandleiding gelieve naar onze website te surfen: http://www.riscogroup.com/support/downloads.</p>	<p>PL</p> <p>Kompatybilna z przewodowymi i hybrydowymi centralami alarmowymi RISCO Group, Elegancka Klawiatura jest wąską, czułą i pewną w działaniu klawiaturą, reagującą na dotyk.</p> <p>Instrukcja Użytkownika klawiatury znajduje się na naszej stronie internetowej: http://www.riscogroup.com/support/downloads.</p>

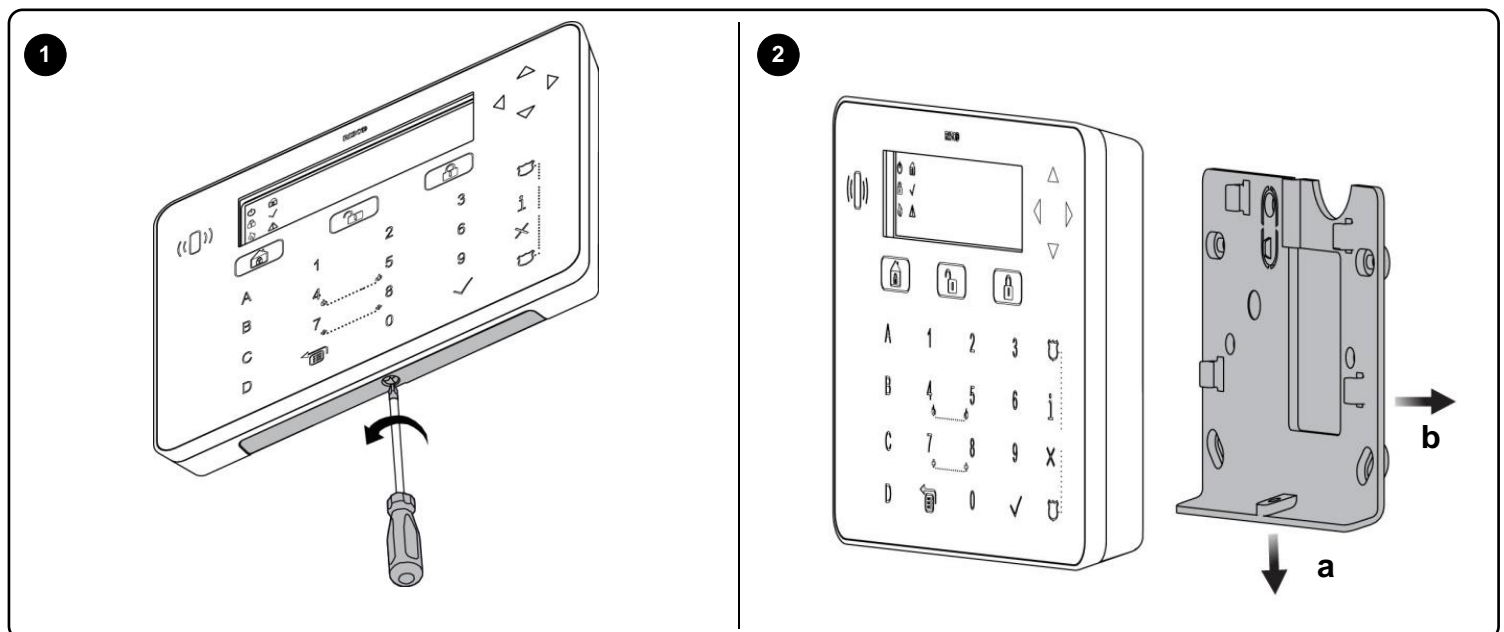

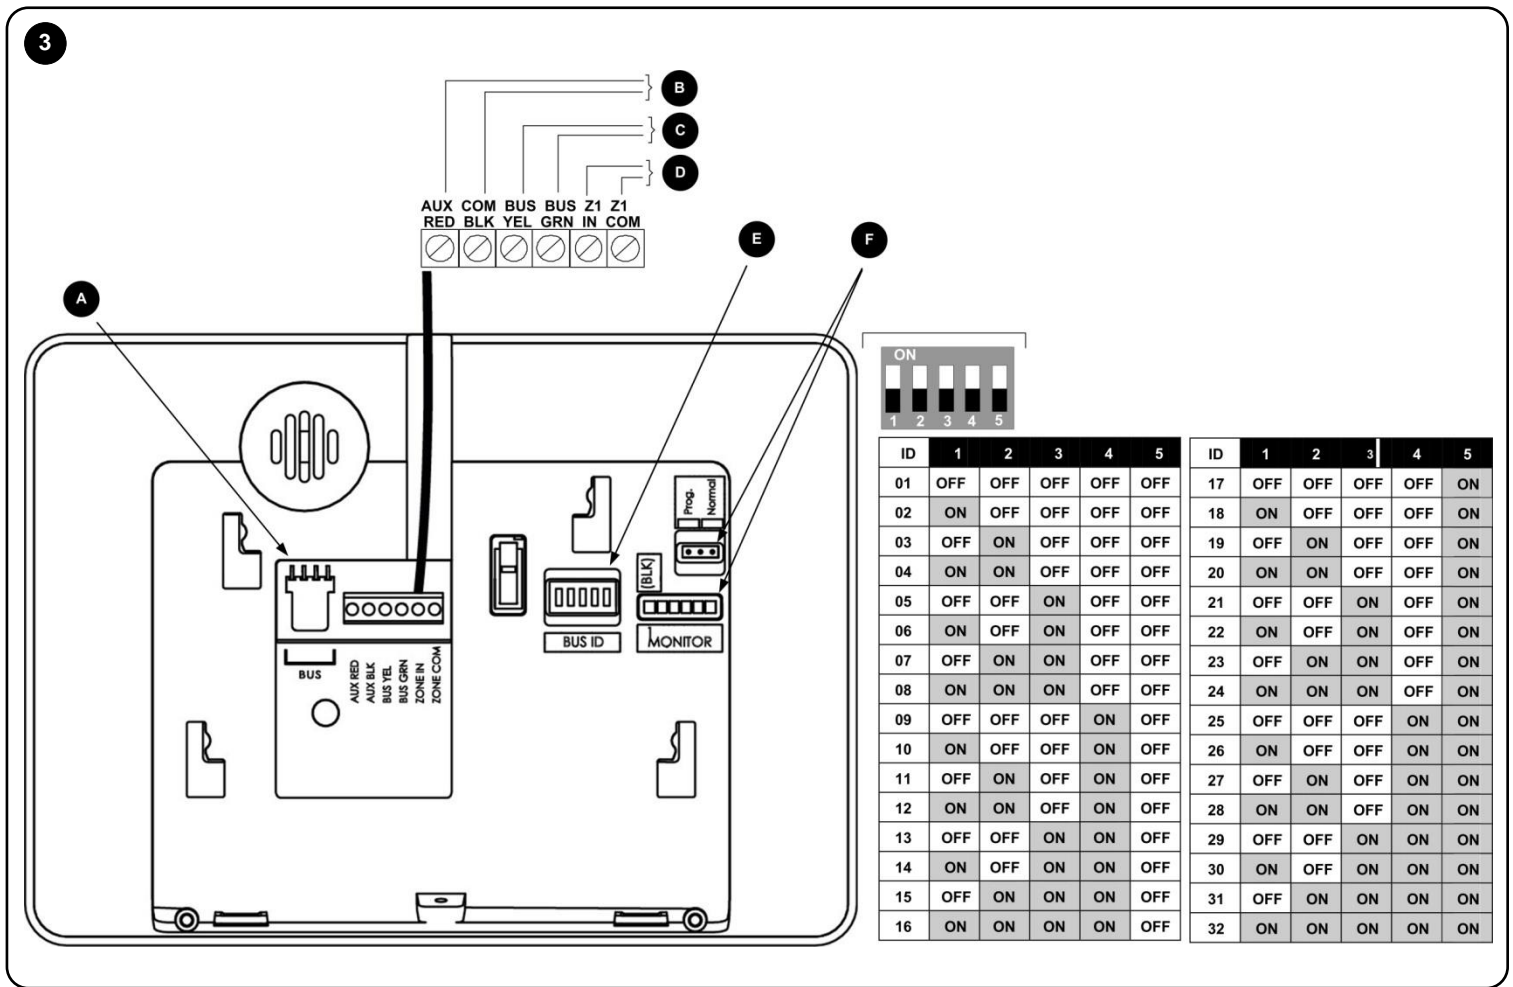

	EN	IT	ES	FR	NL	PL
A	Quick BUS Connector	Connettore BUS ad innesto	Conector rápido de BUS	Connecteur rapide BUS	Snelle BUS Connector	Konektor Magistrali
B	12VDC	12VDC	12VCC	12VDC	12VDC	12VDC
C	BUS	BUS	BUS	BUS	BUS	BUS
D	Additional Zone (supported only on specific versions)	Ingresso di zona aggiuntivo (supportato solo su versioni specifiche)	Zona adicional (Sólo se admite en versiones específicas)	Zone Additionnelle (pris en charge uniquement sur les versions spécifiques)	Additionele Zone (alleen ondersteund op specifieke versies)	Dodatkowa linia dozorowa (obsługiwana tylko w niektórych wersjach)
E	BUS Address	Indirizzo BUS	Dirección BUS	Adresse BUS	BUS Adres	Adres
F	Factory use only	Impostazioni di fabbrica solo	Sólo se utiliza en fábrica	Réservé au fabricant	Enige fabriek gebruiken	Używać tylko fabrycznie

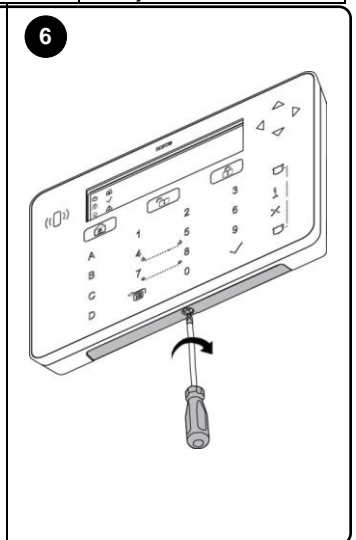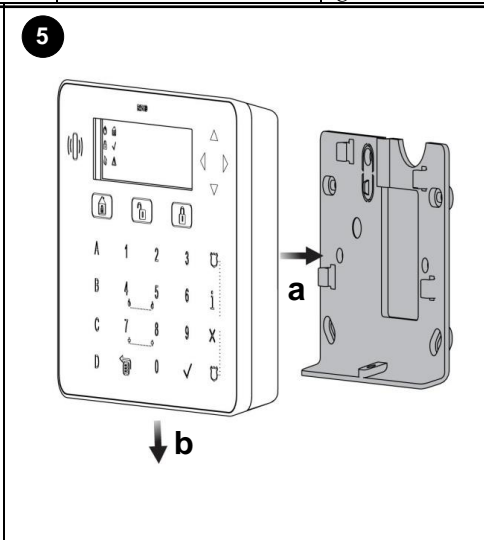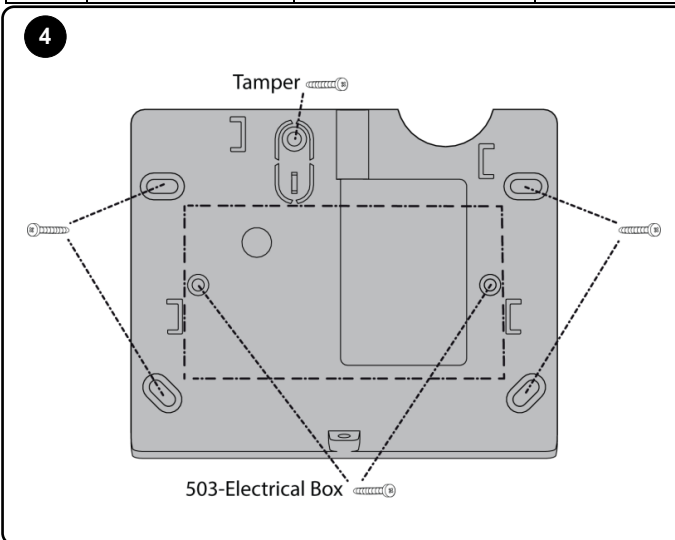

EN Technical Specifications

Parameter	Description
Current Consumption: Elegant Keypad Elegant Keypad (Proximity)	12V +/-15%, 100 mA max. 12V +/-15%, 150 mA max.
Main Panel Connection	4-wire BUS, up to 300 m (1000 ft) from Main Panel
Dimensions	177 mm x 129 mm x 24 mm (6.9" x 5.0" x 0.9")
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Prox. RF Frequency	13.56MHz

ES Características técnicas

Parámetros	Descripción
Consumo de corriente: Teclado Elegant Teclado Elegant (Proximidad)	12V +/-15%, 100 mA máx. 12V +/-15%, 150 mA máx.
Conexión panel principal	4-hilosBUS, hasta 300 m (1000 ft) desde Panel principal
Dimensiones	177 mm x 129 mm x 24 mm (6.9" x 5.0" x 0.9")
Temperatura de funcionamiento	-10°C a 50°C (14°F a 122°F)
Frecuencia Prox.	13.56MHz

NL Technische Specificaties

Parameters	Beschrijving
Stroomverbruik: Elegant Keypad Elegant Keypad (Proximity)	12V +/-15%, 100 mA max. 12V +/-15%, 150 mA max.
Hoofdpaneel Connectie	4-wire BUS, up to 300 m (1000 ft) from Main Panel
Afmetingen	177 mm x 129 mm x 24 mm (6.9" x 5.0" x 0.9")
Bedrijfstemperatuur	-10°C to 50°C (14°F to 122°F)
Prox. RF Frequentie	13.56MHz

Certification

EN50131-3 Grade 3 Environmental class II

FCC ID: JE4RPKELP

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

FCC Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the **FCC Rules**. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on to a different circuit from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IT Specifiche Tecniche



Parametro	Descrizione
Assorbimento in corrente: Tastiera Elegant Tastiera Elegant (con prossimità)	12V +/-15%, 100 mA max. 12V +/-15%, 150 mA max.
Connessione con la scheda di centrale	Via BUS a 4 fili ad una distanza di max 300 metri.
Dimensioni	177 mm x 129 mm x 24 mm
Temperatura di funzionamento	Da -10°C a 50°C
Frequenza prossimità	13.56 MHz

FR Spécifications Techniques

Paramètres	Description
Consommation: Clavier Élégant Clavier Élégant (Proximité)	12V +/-15%, 100 mA max. 12V +/-15%, 150 mA max.
Connexion centrale	BUS 4-fils, jusqu'à 300 m de la centrale
Dimensions	177 mm x 129 mm x 24 mm
Température de fonctionnement	-10°C to 50°C
Fréquence Prox. RF	13.56MHz

PL Dane Techniczne

Parametr	Opis
Pobór prądu: Wersja standardowa Wersja z czynnikiem zbliżeniowym	12V +/-15%, 100 mA max. 12V +/-15%, 150 mA max.
Podłączenie do centrali	4-żyłowa magistrala (BUS), do 300 m
Wymiary [mm]	177 x 129 x 24
Temperatura pracy	-10°C do 50°C
Częstotliwość Systemu zbliżeniowego	13.56MHz

Ordering Information

P/N	Description
RPKELOB0000A	Elegant Keypad, Black
RPKELPB0000A	Elegant Keypad, Black with Proximity
RPKELOW0000A	Elegant Keypad
RPKELPW0000A	Elegant Keypad with Proximity
RP200KT	10 Proximity Key tags (13.5MHz)

UKCA and CE RED Compliance Statement:

Hereby, RISCO Group declares that this equipment is in compliance with the essential requirements of the UKCA Radio Equipment Regulations 2017 and CE Directive 2014/53/EU. For the UKCA and CE Declaration of Conformity please refer to our website: www.riscogroup.com

Standard Limited Product Warranty (“Limited Warranty”)

RISCO Ltd. (“RISCO”) guarantee RISCO’s hardware products (“Products”) to be free from defects in materials and workmanship when used and stored under normal conditions and in accordance with the instructions for use supplied by RISCO, for a period of (i) 24 months from the date of delivery of the Product (the “Warranty Period”). This Limited Warranty covers the Product only within the country where the Product was originally purchased and only covers Products purchased as new.

Contact with customers only. This Limited Warranty is solely for the benefit of customers who purchased the Products directly from RISCO or from an authorized distributor of RISCO. RISCO does not warrant the Product to consumers and nothing in this Warranty obligates RISCO to accept Product returns directly from end users who purchased the Products for their own use from RISCO’s customer or from any installer of RISCO, or otherwise provide warranty or other services to any such end user directly. RISCO’s authorized distributor or installer shall handle all interactions with its end users in connection with this Limited Warranty. RISCO’s authorized distributor or installer shall make no warranties, representations, guarantees or statements to its end users or other third parties that suggest that RISCO has any warranty or service obligation to, or any contractual privity with, any recipient of a Product.

Remedies. In the event that a material defect in a Product is discovered and reported to RISCO during the Warranty Period, RISCO shall accept return of the defective Product in accordance with the below RMA procedure and, at its option, either (i) repair or have repaired the defective Product, or (ii) provide a replacement product to the customer.

Return Material Authorization. In the event that you need to return your Product for repair or replacement, RISCO will provide you with a Return Merchandise Authorization Number (RMA#) as well as return instructions. Do not return your Product without prior approval from RISCO. Any Product returned without a valid, unique RMA# will be refused and returned to the sender at the sender’s expense. The returned Product must be accompanied with a detailed description of the defect discovered (“Defect Description”) and must otherwise follow RISCO’s then-current RMA procedure published in RISCO’s website at www.riscogroup.com in connection with any such return. If RISCO determines in its reasonable discretion that any Product returned by customer conforms to the applicable warranty (“Non-Defective Product”), RISCO will notify the customer of such determination and will return the applicable Product to customer at customer’s expense. In addition, RISCO may propose and assess customer a charge for testing and examination of Non-Defective Product.

Entire Liability. The repair or replacement of Products in accordance with this Limited Warranty shall be RISCO’s entire liability and customer’s sole and exclusive remedy in case a material defect in a Product is discovered and reported as required herein. RISCO’s obligation and this Limited Warranty are contingent upon the full payment by customer for such Product and upon a proven weekly testing and examination of the Product functionality.

Limitations. This Limited Warranty is the only warranty made by RISCO with respect to the Products. The warranty is not transferable to any third party. To the maximum extent permitted by applicable law, this Limited Warranty shall not apply and will be void if: (i) the conditions set forth above are not met (including, but not limited to, full payment by customer for the Product and a proven weekly testing and examination of the Product functionality); (ii) if the Products or any part or component thereof: (a) have been subjected to improper operation or installation; (b) have been subject to neglect, abuse, willful damage, abnormal working conditions, failure to follow RISCO’s instructions (whether oral or in writing); (c) have been misused, altered, modified or repaired without RISCO’s written approval or combined with, or installed on products, or equipment of the customer or of any third party; (d) have been damaged by any factor beyond RISCO’s reasonable control such as, but not limited to, power failure, electric power surges, or unsuitable third party components and the interaction of software therewith or (e) any failure or delay in the performance of the Product attributable to any means of communication provided by any third party service provider, including, but not limited to, GSM interruptions, lack of or internet outage and/or telephony failure. BATTERIES ARE EXPLICITLY EXCLUDED FROM THE WARRANTY AND RISCO SHALL NOT BE HELD RESPONSIBLE OR LIABLE IN RELATION THERETO, AND THE ONLY WARRANTY APPLICABLE THERETO, IF ANY, IS THE BATTERY MANUFACTURER’S WARRANTY. RISCO does not install or integrate the Product in the end user’s security system and is therefore not responsible for and cannot guarantee the performance of the end user’s security system which uses the Product or which the Product is a component of.

This Limited Warranty applies only to Products manufactured by or for RISCO. Further, this Limited Warranty does not apply to any software (including operating system) added to or provided with the Products or any third-party software, even if packaged or sold with the RISCO Product. Manufacturers, suppliers, or third parties other than RISCO may provide their own warranties, but RISCO, to the extent permitted by law and except as otherwise specifically set forth herein, provides its Products “AS IS”. Software and applications distributed or made available by RISCO in conjunction with the Product (with or without the RISCO brand), including, but not limited to system software, as well as P2P services or any other service made available by RISCO in relation to the Product, are not covered under this Limited Warranty. Refer to the Terms of Service at: www.riscogroup.com/warranty for details of your rights and obligations with respect to the use of such applications, software or any service. RISCO does not represent that the Product may not be compromised or circumvented; that the Product will prevent any personal injury or property loss by burglary, robbery, fire or otherwise, or that the Product will in all cases provide adequate warning or protection. A properly installed and maintained alarm may only reduce the risk of a burglary, robbery or fire without warning, but it is not insurance or a guarantee that such will not occur or will not cause or lead to personal injury or property loss. CONSEQUENTLY, RISCO SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE OR OTHER LOSS BASED ON ANY CLAIM AT ALL INCLUDING A CLAIM THAT THE PRODUCT FAILED TO GIVE WARNING.

EXCEPT FOR THE WARRANTIES SET FORTH HEREIN, RISCO AND ITS LICENSORS HEREBY DISCLAIM ALL EXPRESS, IMPLIED OR STATUTORY, REPRESENTATIONS, WARRANTIES, GUARANTEES, AND CONDITIONS WITH REGARD TO THE PRODUCTS, INCLUDING BUT NOT LIMITED TO ANY REPRESENTATIONS, WARRANTIES, GUARANTEES, AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND WARRANTIES AGAINST HIDDEN OR LATENT DEFECTS, TO THE EXTENT PERMITTED BY LAW. WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, RISCO AND ITS LICENSORS DO NOT REPRESENT OR WARRANT THAT: (i) THE OPERATION OR USE OF THE PRODUCT WILL BE TIMELY, SECURE, UNINTERRUPTED OR ERROR-FREE; (ii) THAT ANY FILES, CONTENT OR INFORMATION OF ANY KIND THAT MAY BE ACCESSED THROUGH THE PRODUCT SHALL REMAIN SECURED OR NON DAMAGED. CUSTOMER ACKNOWLEDGES THAT NEITHER RISCO NOR ITS LICENSORS CONTROL THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, GSM OR OTHER MEANS OF COMMUNICATIONS AND THAT RISCO’S PRODUCTS, MAY BE SUBJECT TO LIMITATIONS, DELAYS, AND OTHER PROBLEMS INHERENT IN THE USE OF SUCH MEANS OF COMMUNICATIONS. RISCO IS NOT RESPONSIBLE FOR ANY DELAYS, DELIVERY FAILURES, OR OTHER DAMAGE RESULTING FROM SUCH PROBLEMS. RISCO WARRANTS THAT ITS PRODUCTS DO NOT, TO THE BEST OF ITS KNOWLEDGE, INFRINGE UPON ANY PATENT, COPYRIGHT, TRADEMARK, TRADE SECRET OR OTHER INTELLECTUAL PROPERTY RIGHT IN ANY EVENT RISCO SHALL NOT BE LIABLE FOR ANY AMOUNTS REPRESENTING LOST REVENUES OR PROFITS, PUNITIVE DAMAGES, OR FOR ANY OTHER INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, EVEN IF THEY WERE FORESEEABLE OR RISCO HAS BEEN INFORMED OF THEIR POTENTIAL.

Contacting RISCO Group

RISCO Group is committed to customer service and product support. You can contact us through our website (www.riscogroup.com) or at the following telephone and fax numbers:

United Kingdom

Tel: +44-(0)-161-655-5500
support-uk@riscogroup.com

Italy

Tel: +39-02-66590054
support-it@riscogroup.com

Spain

Tel: +34-91-490-2133
support-es@riscogroup.com

France

Tel: +33-164-73-28-50
support-fr@riscogroup.com

Belgium (Benelux)

Tel: +32-2522-7622
support-be@riscogroup.com

China (Shanghai)

Tel: +86-21-52-39-0066
support-cn@riscogroup.com

USA

Tel: +1-631-719-4400
support-usa@riscogroup.com

Israel

Tel: +972-3-963-7777
support@riscogroup.com



All rights reserved.

No part of this document may be reproduced in any form without prior written permission from the publisher.

© RISCO Group 01/2022

5IN2165 G