



Premium Electrical Products & Accessories



**COMPARE
THE
QUALITY**

Voltec Power & Lighting has over 30 years of experience in the manufacturing & distribution of premium power and lighting products, servicing the needs of the Electrical, STAFDA and Industrial Distributors. With our high standard of quality manufacturing and new product development, we strive to maintain the most complete breadth-of-line

product offering in the market place today. Our **EXTREME All-Weather line of products are 100% exclusively manufactured at our USA facilities** in Newark, NJ and Anderson, South Carolina. We know and understand that growth is directly related to new products. So here at Voltec, with a *focus on efficiency and innovation, we strive to bring you the right products to help*

grow our partnership and enhance your margins. We have trained and honed our personnel to provide excellence through prompt, efficient and friendly customer service. Our goal is to surpass your expectations.

Voltec Power & Lighting is where Quality, Value and Innovation Come Together!

Innovative Products

Industry Leader in Custom Products

Breadth of Line

E-ZEELOCK®
LOCKING CONNECTOR 

A ProSeries product Exclusively from Voltec Power & Lighting



PREMIUM QUALITY • BUILT WITH OPTIONS • MADE TO LAST

Compare the Quality



Table of Contents

Flexon® Water Hose 4
EXTREME Extension Cords..... 5
E-ZEELOCK® Locking Connector..... 6
Outdoor 300V Extension Cords..... 7-8
Outdoor 600V Extension Cords..... 8
KWIK Kustom Extension Cords - MADE IN USA..... 9
Custom Cords Extension Cords/Quote Form 10-11
Adapters..... 12-13
Portable GFCIs 14
Adapters - Quad Box 14
Replacement Power Supply Cords..... 15
Air Conditioning Appliance Extension Cords 15
Garbage Disposal/Power Supply Cords..... 15
Range & Dryer Cords 16
TBOX™ Commercial Power..... 17
Temporary Power Cords..... 18
Temporary Area Lighting 18-19
Temporary Light Strings..... 20
Handheld LED Lighting..... 21
Hands-Free LED Head Lamps..... 22
Portable LED Work Lights..... 23
Tripod LED Work Lights..... 24
Halogen Portable/Tripod Work Lights..... 25
Incandescent Trouble Lights 26
Retractable Cord Reels and Workbench Cord..... 26
Surge/Power Strips..... 27
Wiring Devices 28
Wiring Device Cross Reference 29
Product Replacement Parts 30
QR Page Scan to Watch Product Videos..... 31
NEMA Chart 32
Glossary..... 33-37
Index of Product 38-40
Regional Warehouse Contact Information 43
Warranty, Return of Goods and Shipping Policies 43

Voltec Power & Lighting Regional Distribution Warehouses

- Chino, California
- Hayward, California
- Orlando, Florida
- Chicago, Illinois
- Annapolis Junction, Maryland
- Newark, New Jersey
- Greer, South Carolina
- Houston, Texas
- Seattle, Washington



See Inside Back Cover for Contact Information

AFFILIATES



The information contained in this catalog is presented solely as a guide to product selection and is reliable to the best of our knowledge. Any printing errors are subject to correction in future releases or reprints of this catalog. Voltec Power & Lighting has taken precautions at the time of publication, to ensure the accuracy of the data and specifications presented herein, but reserves the right to modify, append or change the specifications of any and all products contained within this catalog at any time and without prior notice.


Flexon®

watering done right since 1956

Not Just Lawn and Garden


USA MADE

For over 60 years, Flexon™ hose has maintained a standard of quality, performance and durability in ALL lines of hoses. Flexon™ carries a wide range of hoses suited for professional contractors.




ITEM PN#	LENGTH	INT DIAM	PLY	HOSE COLOR	WARRANTY LENGTH	PACK QTY
CONTRACTOR RUBBER & VINYL HOSE						
HDCG5850BKGY	50ft	5/8" ID	6 Ply	Black	Lifetime	5
HDCG58100BKGY	100ft	5/8" ID	6 Ply	Black	Lifetime	3
HDCG3450BKGY	50ft	3/4" ID	6 Ply	Black	Lifetime	5
HDCG34100BKGY	100ft	3/4" ID	6 Ply	Black	Lifetime	2
• 300 PSI Burst Strength			• Commercial Strength			
• Industrial Strength Male/Female Couplings			• Heavy Duty Strain Relief Spring			

**Superior
Strength
in Toughest
Applications**




ITEM PN#	LENGTH	INT DIAM	PLY	HOSE COLOR	WARRANTY LENGTH	PACK QTY
INTERMEDIATE DUTY CONTRACTOR GRADE RUBBER & VINYL HOSE						
MDCG5850GYBK	50ft	5/8" ID	4 Ply	Grey	10 Year	5
MDCG58100GYBK	100ft	5/8" ID	4 Ply	Grey	10 Year	3
MDCG3450GYBK	50ft	3/4" ID	4 Ply	Grey	10 Year	5
MDCG34100GYBK	100ft	3/4" ID	4 Ply	Grey	10 Year	2
• 250 PSI Burst Strength			• Commercial Strength			




ITEM PN#	LENGTH	INT DIAM	PLY	HOSE COLOR	WARRANTY LENGTH	PACK QTY
COMMERCIAL BLACK PREMIUM RUBBER HOSE						
PH5850	50ft	5/8" ID	3 Ply	Black	10 Year	5
PH58100	100ft	5/8" ID	3 Ply	Black	10 Year	3
• Hot Water Safe						
• HEX Couplings						

**Tough
Under
Rugged
Conditions**



ITEM PN#	LENGTH	INT DIAM	PLY	HOSE COLOR	WARRANTY LENGTH	PACK QTY
HOT WATER PREMIUM RUBBER HOSE						
FAR3450	50ft	3/4" ID	3 Ply	Red	10 Year	3
• 3/4" for greater water flow						
• Withstands Hot Water up to 180°F						
• Stays Flexible in Cold Temperatures						



ITEM PN#	LENGTH	INT DIAM	PLY	HOSE COLOR	WARRANTY LENGTH	PACK QTY
WEEP & SOAK ALL RUBBER SLOW SOAKER HOSE						
WS50	50ft	1/2" ID	N/A	Black	7 Year	5
• Non Clog Porous Design						
• Plastic Coupling						
• Includes Blue Flow Restrictor Washer • Sourced from overseas						



LIMITED LIFETIME WARRANTY



All-Weather 300V SJE00W Extension Cords -94°F to 221°F



SCAN TO WATCH VIDEO

The **EXTREME All-Weather Extension Cord** is constructed of 100% TRUE TPE (thermo-plastic elastomer) compound which allows the cord to stay flexible in the most extreme climates without affecting the cord's performance. The TPE compound provides a lightweight, tangle-free construction to the EXTREME cord, not commonly found on most standard PVC cords.

TPE Thermo-plastic Elastomer (SJE00W) provides maximum flexibility year-round. Includes power indicator light to show when power is on.



3-CONDUCTOR 300V SJE00W EXTENSION CORDS WITH LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
97015	15ft	16/3	SJE00W	Blue/Red	1	5-15P	5-15R	13	1625	16
97025	25ft	16/3	SJE00W	Blue/Red	1	5-15P	5-15R	13	1625	16
97050	50ft	16/3	SJE00W	Blue/Red	1	5-15P	5-15R	13	1625	12
97100	100ft	16/3	SJE00W	Blue/Red	1	5-15P	5-15R	10	1250	6
98015	15ft	14/3	SJE00W	Blue/Red	1	5-15P	5-15R	15	1875	20
98025	25ft	14/3	SJE00W	Blue/Red	1	5-15P	5-15R	15	1875	16
98050	50ft	14/3	SJE00W	Blue/Red	1	5-15P	5-15R	15	1875	6
98100	100ft	14/3	SJE00W	Blue/Red	1	5-15P	5-15R	13	1625	3
99015	15ft	12/3	SJE00W	Blue/Red	1	5-15P	5-15R	15	1875	20
99025	25ft	12/3	SJE00W	Blue/Red	1	5-15P	5-15R	15	1875	12
99050	50ft	12/3	SJE00W	Blue/Red	1	5-15P	5-15R	15	1875	4
99100	100ft	12/3	SJE00W	Blue/Red	1	5-15P	5-15R	15	1875	2
90050EXT	50ft	10/3	SJE00W	Blue	1	5-15P	5-15R	15	1875	2
90100EXT	100ft	10/3	SJE00W	Blue	1	5-15P	5-15R	15	1875	1



The EXTREME All-Weather extension cord has been tested from Maine to Alaska - in the harshest conditions including ice and snow - from the oil fields up to the mountains. No temperature nor terrain can outlast EXTREME!



3-CONDUCTOR 300V SJE00W EXTENSION CORDS WITH POWER BLOCK AND LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
98025PB	25ft	14/3	SJE00W	Blue/Red	3	5-15P	5-15R	15	1875	16
98050PB	50ft	14/3	SJE00W	Blue/Red	3	5-15P	5-15R	15	1875	6
98100PB	100ft	14/3	SJE00W	Blue/Red	3	5-15P	5-15R	13	1625	3
99002PB	2ft	12/3	SJE00W	Blue/Red	3	5-15P	5-15R	15	1875	12
99025PB	25ft	12/3	SJE00W	Blue/Red	3	5-15P	5-15R	15	1875	12
99050PB	50ft	12/3	SJE00W	Blue/Red	3	5-15P	5-15R	15	1875	4
99100PB	100ft	12/3	SJE00W	Blue/Red	3	5-15P	5-15R	15	1875	2





SCAN TO WATCH VIDEO



**A ProSeries product Exclusively
from Voltec Power & Lighting**

Locking Your Cord is as E-ZEE as 1 • 2 • 3

1




Plug E-ZEE LOCK® Connector into male plug

2



Close E-ZEE LOCK® latching mechanism onto the cable of the male plug. (Must attach to the cable, not the male plug)

3

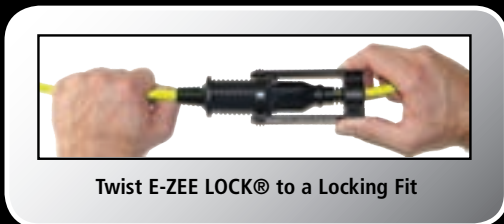

Twist E-ZEE LOCK® to a Locking Fit



Extension Cord is Locked

**Outdoor 300V SJTW
Extension Cords -40°F to 140°F**



**3-CONDUCTOR 300V SJTW EXTENSION CORDS
WITH E-ZEELOCK™ AND LIGHTED END**



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
05-00111	25ft	14/3	SJTW	Orange/Black	1	5-15P	5-15R	15	1875	12
05-00112	50ft	14/3	SJTW	Orange/Black	1	5-15P	5-15R	15	1875	6
05-00113	100ft	14/3	SJTW	Orange/Black	1	5-15P	5-15R	13	1625	3
05-00105	25ft	12/3	SJTW	Yellow/Blue	1	5-15P	5-15R	15	1875	12
05-00106	50ft	12/3	SJTW	Yellow/Blue	1	5-15P	5-15R	15	1875	4
05-00107	100ft	12/3	SJTW	Yellow/Blue	1	5-15P	5-15R	15	1875	2
05-00118	50ft	10/3	SJTW	Yellow/Black	1	5-15P	5-15R	15	1875	1
05-00119	100ft	10/3	SJTW	Yellow/Black	1	5-15P	5-15R	15	1875	1



**LOCKING PLUG TO U-GROUND CONNECTOR AND
U-GROUND PLUG TO LOCKING CONNECTOR**



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00092	1ft	12/3	STW	Yellow	1	L5-20P	5-15R	15	1875	10
04-00093	1ft	12/3	STW	Yellow	1	5-15P	L5-20R	15	1875	10



**MULTI-PURPOSE CORD LOCK ADAPTER
WITH CLIP STRIP**



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00491	1ft	12/3	STW	Yellow	1	5-15P	5-15R	15	1875	6



See Full Line of Adapters on Page 12-13



Outdoor 300V SJTW Extension Cords -40°F to 140°F

3-CONDUCTOR 300V SJTW EXTENSION CORDS



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	POWER RATING WATTS	PACK QTY
05-00108	25ft	16/3	SJTW	Orange	1	5-15P	5-15R	13	1625	12
05-00109	50ft	16/3	SJTW	Orange	1	5-15P	5-15R	13	1625	12
05-00110	100ft	16/3	SJTW	Orange	1	5-15P	5-15R	10	1250	6



Outdoor 300V SJTW Extension Cords with Lighted Ends -40°F to 140°F

3-CONDUCTOR 300V SJTW EXTENSION CORDS WITH LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	POWER RATING WATTS	PACK QTY
05-00341	25ft	14/3	SJTW	Orange	1	5-15P	5-15R	15	1875	12
05-00342	50ft	14/3	SJTW	Orange	1	5-15P	5-15R	15	1875	6
05-00343	100ft	14/3	SJTW	Orange	1	5-15P	5-15R	13	1625	3
05-00364	25ft	12/3	SJTW	Yellow	1	5-15P	5-15R	15	1875	12
05-00365	50ft	12/3	SJTW	Yellow	1	5-15P	5-15R	15	1875	4
05-00366	100ft	12/3	SJTW	Yellow	1	5-15P	5-15R	15	1875	2
05-00350	50ft	10/3	SJTW	Yellow	1	5-15P	5-15R	15	1875	1
05-00351	100ft	10/3	SJTW	Yellow	1	5-15P	5-15R	15	1875	1



Outdoor 300V SJTW Extension Cords with Lighted Power Block -40°F to 140°F

3-CONDUCTOR 300V SJTW EXTENSION CORD WITH LIGHTED POWER BLOCK



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	POWER RATING WATTS	PACK QTY
05-00120	25ft	14/3	SJTW	Orange	3	5-15P	5-15R	15	1875	12
05-00121	50ft	14/3	SJTW	Orange	3	5-15P	5-15R	15	1875	6
05-00122	100ft	14/3	SJTW	Orange	3	5-15P	5-15R	13	1625	4
05-00123	25ft	12/3	SJTW	Yellow	3	5-15P	5-15R	15	1875	8
05-00124	50ft	12/3	SJTW	Yellow	3	5-15P	5-15R	15	1875	4
05-00125	100ft	12/3	SJTW	Yellow	3	5-15P	5-15R	15	1875	2



Outdoor 300V SJTW Locking Extension Cords -40°F to 140°F



3-CONDUCTOR 300V SJTW EXTENSION CORD WITH LOCKING CONNECTORS and LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
05-00128	50ft	12/3	SJTW	Yellow	1	L5-20P	L5-20R	20	2500	4
05-00131	100ft	12/3	SJTW	Yellow	1	L5-20P	L5-20R	15	1875	2

Outdoor 300V SJTW Extension Cords -40°F to 140°F



3-CONDUCTOR 300V SJTW EXTENSION CORD with LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
05-00352	50ft	10/3	SJTW	Black	1	5-20P	5-20R	20	2500	2
05-00353	100ft	10/3	SJTW	Black	1	5-20P	5-20R	20	2500	1

Generator 300V SJTW Extension Cords -40°F to 140°F



4-CONDUCTOR 300V SJTW EXTENSION CORD with LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
05-00514	25ft	10/4	SJTW	Yellow	1	L14-30P	L14-30R	25	3125/6250	4
05-00515	50ft	10/4	SJTW	Yellow	1	L14-30P	L14-30R	25	3125/6250	2

Outdoor 600V STOW Locking Extension Cords -40°F to 140°F



3-CONDUCTOR 600V STOW LOCKING EXTENSION CORDS



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
06-00180	50ft	10/3	STOW	Black	1	L6-30P	L6-30R	30	7500	1
06-00181	100ft	10/3	STOW	Black	1	L6-30P	L6-30R	25	6250	1

Outdoor 600V STW Extension Cords -40°F to 140°F



3-CONDUCTOR 600V STW EXTENSION CORDS



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
06-00162	50ft	12/3	STW	Yellow	1	5-15P	5-15R	15	1875	2
06-00163	100ft	12/3	STW	Yellow	1	5-15P	5-15R	15	1875	2



3-CONDUCTOR 600V STW LOCKING EXTENSION CORDS



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
06-00167	50ft	12/3	STW	Yellow	1	L5-20P	L5-20R	20	2500	2
06-00168	100ft	12/3	STW	Yellow	1	L5-20P	L5-20R	15	1875	2



300V SJTW Super-Flex Extension Cords -49°F to 167°F



3-CONDUCTOR 300V SJTW SUPER-FLEX PREMIUM JACKET RED/WHITE/BLUE EXTENSION CORDS WITH LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
05-00157-US	25ft	12/3	SJTW	Red/White/Blue	1	5-15P	5-15R	15	1875	12
05-00158-US	50ft	12/3	SJTW	Red/White/Blue	1	5-15P	5-15R	15	1875	4
05-00159-US	100ft	12/3	SJTW	Red/White/Blue	1	5-15P	5-15R	15	1875	2



300V SJTW Extension Cords -40°F to 140°F

CORD IDENTITY PREVENTS CORD LOSS.



For more Custom Cord information See Page 10

Stand Out From The Crowd. Available in Stock.

3-CONDUCTOR 300V SJTW COLOR EXTENSION CORDS WITH LIGHTED END



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
05-00114	50ft	12/3	SJTW	FL Green	1	5-15P	5-15R	15	1875	4
05-00116	100ft	12/3	SJTW	FL Green	1	5-15P	5-15R	15	1875	2
05-00115	50ft	12/3	SJTW	Red	1	5-15P	5-15R	15	1875	4
05-00117	100ft	12/3	SJTW	Red	1	5-15P	5-15R	15	1875	2
05-00152	50ft	12/3	SJTW	Pink	1	5-15P	5-15R	15	1875	4
05-00153	100ft	12/3	SJTW	Pink	1	5-15P	5-15R	15	1875	2
05-00347	25ft	12/3	SJTW	Medium Blue	1	5-15P	5-15R	15	1875	12
05-00348	50ft	12/3	SJTW	Medium Blue	1	5-15P	5-15R	15	1875	4
05-00349	100ft	12/3	SJTW	Medium Blue	1	5-15P	5-15R	15	1875	2

3-CONDUCTOR 300V SJTW EXTENSION CORDS WITH SOLID BLACK ENDS



05-00555	50ft	12/3	SJTW	Black	1	5-15P	5-15R	15	1875	4
05-00556	100ft	12/3	SJTW	Black	1	5-15P	5-15R	15	1875	2

CUSTOM CORDS

CHOICE OPTIONS

- SINGLE 5-15
- POWER BLOCK (3) 5-15
- 12 CORD COLORS

- SOLID COLOR & CLEAR ENDS
- SINGLE STRIPE OPTION
- CUSTOM IMPRINT

SINGLE 5-15



POWER BLOCK (3) 5-15



CORD IDENTITY HELPS PREVENTS CORD LOSS

PROPERTY OF YOUR COMPANY NAME HERE 866-486-5832
 IF FOUND CALL 866-486-5832



CHOOSING A CLEAR-LIGHTED RECEPTACLE END SHOWS POWER IS ON!

3 DOMESTIC PROGRAMS TO CHOOSE FROM

SHORT-RUN 2,500 LINEAR FEET	SHORT-RUN 5,000 LINEAR FEET	FULL-RUN MINIMUM 10,000 LINEAR
300V SJTW • 12/3 AWG BLACK INK IMPRINT ONLY		300V SJTW OR SJE00W • 14/3, 16/3, 10/3 AWG BLACK INK OR INDENT IMPRINTING
SOLID COLORS ONLY - NO STRIPES		SINGLE STRIPE OPTION
MIX & MATCH - CHOICES OF 25, 50 OR 100 FOOT LENGTHS		

4-6 WEEK LEAD TIME





Custom Cord Quote Form

Distributor: _____ Prepared By: _____
 Customer: _____ Date: _____

SHORT-RUN - 2,500/5,000 LINEAR FEET

QUANTITY: ___ OF 25FT ___ OF 50FT ___ OF 100FT

SHIP TO/DELIVERY ZIP CODE: _____

CORD TYPE AND GAUGE

WIRE SJTW 300V GAUGE 12/3

CHOOSE CORD COLOR

MEDIUM BLUE ORANGE RED
 YELLOW PURPLE FL GREEN
 FL PINK

NEMA PLUG

5-15P

CHOOSE PLUG COLOR

CLEAR BLACK

CHOOSE RECEPTACLE

5-15R (3) 5-15R











CHOOSE RECEPTACLE COLOR

CLEAR (LIGHTED) BLACK

CUSTOM IMPRINT - MAXIMUM 125 CHARACTERS - ONE LINE

INK (BLACK INK ONLY)

CUSTOM TEXT: _____

 MEDIUM BLUE PMS 2979	 ORANGE PMS 1665	 RED PMS 1807C	 YELLOW PMS 102
 PURPLE PMS 254	 FL GREEN PMS 802	 FL PINK PMS 806	
 DARK BLUE PMS 295	 DARK GREEN PMS 562	 GREY PMS 422	

• FL - FLUORESCENT
 • COLORS ARE FOR REFERENCE ONLY. COLORS MAY NOT BE AN EXACT MATCH TO CORD COLOR.

FULL-RUN - MINIMUM 10,000 LINEAR FEET

QUANTITY: ___ OF 25FT ___ OF 50FT ___ OF 100FT

CHOOSE WIRE TYPE AND GAUGE

SJTW 300V SJE00W 300V

GAUGE CHOICE 16/3 14/3 12/3 10/3

CHOOSE CORD COLOR

MEDIUM BLUE ORANGE RED
 GREY YELLOW PURPLE
 DARK BLUE DARK GREEN FL GREEN
 FL PINK BLACK WHITE

NEMA PLUG

5-15P

CHOOSE PLUG COLOR

CLEAR BLACK MEDIUM BLUE
 ORANGE RED YELLOW
 FL GREEN FL PINK

CHOOSE RECEPTACLE

5-15R (3) 5-15R

CHOOSE RECEPTACLE COLOR

CLEAR (LIGHTED) BLACK MEDIUM BLUE
 ORANGE RED YELLOW
 FL GREEN FL PINK

CUSTOM IMPRINT - ONE LINE - SELECT ONE CHOICE BELOW

INDENT (PLATE FEE) 25 CHARACTERS MAXIMUM
 INK (BLACK INK ONLY) 125 CHARACTERS MAXIMUM

CUSTOM TEXT: _____

STRIPE AND COLOR OPTION: YES | NO

MEDIUM BLUE ORANGE RED
 GREY YELLOW PURPLE
 DARK BLUE DARK GREEN FL GREEN
 FL PINK BLACK WHITE

Adapters

PRO SERIES

E-ZEELOCK® MULTI-PURPOSE CORD-LOCK ADAPTER WITH E-ZEELOCK® (CLIP STRIP)

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00491	1ft	12/3	STW	Yellow	1	5-15P	5-15R	15	1875	6

3-OUTLET ADAPTER WITH LIGHTED POWER BLOCK

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00088	2ft	14/3	SJTW	Orange/Black	3	5-15P	5-15R	15	1875	6
04-00090	2ft	12/3	STW	Yellow	3	5-15P	5-15R	15	1875	6

3-OUTLET ADAPTER WITH LOCKING PLUG AND LIGHTED POWER BLOCK

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00091	2ft	12/3	STW	Yellow	3	L5-20P	5-15R	15	1875	6

U-GROUND "Y" ADAPTER WITH LIGHTED ENDS

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00094	2ft	12/3	STW	Yellow	2	5-15P	5-15R	15	1875	12

"Y" ADAPTER WITH LOCKING PLUG AND LIGHTED ENDS

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00095	2ft	12/3	STW	Yellow	2	L5-20P	L5-20R	20	2500	12

U-GROUND "W" ADAPTER WITH LIGHTED ENDS

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00096	2ft	12/3	STW	Yellow	3	5-15P	5-15R	15	1875	12

"W" ADAPTER WITH LOCKING PLUG AND LIGHTED ENDS

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00097	2ft	12/3	STW	Yellow	3	L5-20P	L5-20R	20	2500	12



JOB SITE TOUGH

LIMITED LIFETIME WARRANTY

COMPARE THE QUALITY

Adapters

PRO SERIES

E-ZEELOCK 20 AMP GENERATOR "W" ADAPTER WITH LIGHTED ENDS AND CLEAR PLUG									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
04-00214	2ft	10/4-10/3	STW	Yellow	3	L14-30P	5-20R	20 2500	4
04-00215	2ft	10/3	STW	Yellow	3	TT30P	5-20R	20 2500	4
04-00216	2ft	10/3	STW	Yellow	3	L5-30P	5-20R	20 2500	4
04-00217	2ft	10/3	STW	Yellow	3	L5-20P	5-20R	20 2500	4




SCAN TO WATCH VIDEO



<p>04-00214</p> <p>L14-30P 5-20R 5-20R 5-20R</p>	<p>04-00215</p> <p>TT-30P 5-20R 5-20R 5-20R</p>
<p>04-00216</p> <p>L5-30P 5-20R 5-20R 5-20R</p>	<p>04-00217</p> <p>L5-20P 5-20R 5-20R 5-20R</p>

U-GROUND PLUG TO T-SLOT CONNECTOR									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
04-00098	1ft	12/3	STW	Yellow	1	5-15P	5-20R	15 1875	6



NEW PRODUCT

LOCKING PLUG TO U-GROUND CONNECTOR									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
04-0092N	1ft	12/3	STW	Yellow	1	L5-20P	5-15R	15 1875	10




U-GROUND PLUG TO LOCKING CONNECTOR									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
04-0093N	1ft	12/3	STW	Yellow	1	5-15P	L5-20R	15 1875	10




E-ZEELOCK LOCKING PLUG TO U-GROUND CONNECTOR									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
04-00092	1ft	12/3	STW	Yellow	1	L5-20P	5-15R	15 1875	10

PRO SERIES



E-ZEELOCK U-GROUND PLUG TO LOCKING CONNECTOR									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
04-00093	1ft	12/3	STW	Yellow	1	5-15P	L5-20R	15 1875	10

PRO SERIES




3-OUTLET WALL TAP ADAPTERS						
ITEM PN#	COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
04-00087	Yellow	3	5-15P	5-15R	15 1875	25





PORTABLE GFCI (GROUND FAULT CIRCUIT INTERRUPTERS)


NEW! All GFCI's are equipped with an Auto Monitoring Function.

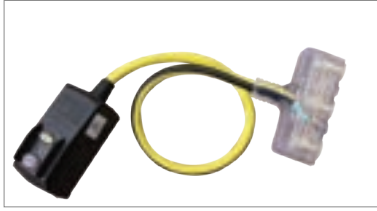

15 AMP RIGHT ANGLE GFCI MODULE/LIGHTED POWER BLOCK										
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00101	2ft	12/3	SJTW	Yellow/Black	3	5-15P	5-15R	15	1875	6
• Auto Reset										



15 AMP IN-LINE GFCI MODULE WITH POWER BLOCK										
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00105	2ft	12/3	SJTW	Yellow/Black	3	5-15P	5-15R	15	1875	6
• Auto Reset					• Rainproof Enclosure					

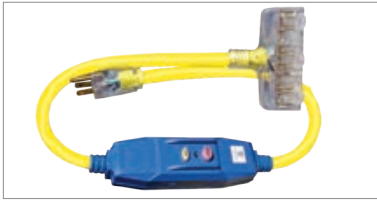


20 AMP IN-LINE GFCI MODULE WITH LIGHTED POWER BLOCK										
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00102	3ft	12/3	STW	Yellow/Blue	3	5-15P	5-15R	15	1875	6
• Manual Reset					• Rainproof Enclosure					




20 AMP IN-LINE GFCI MODULE WITH LIGHTED END										
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00103	3ft	12/3	STW	Yellow/Blue	1	5-15P	5-15R	15	1875	6
• Manual Reset					• Rainproof Enclosure					



20 AMP IN-LINE GFCI MODULE WITH LIGHTED LOCKING END										
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00104	3ft	12/3	STW	Yellow/Blue	1	L5-20P	L5-20R	20	2500	6
• Manual Reset					• Rainproof Enclosure					

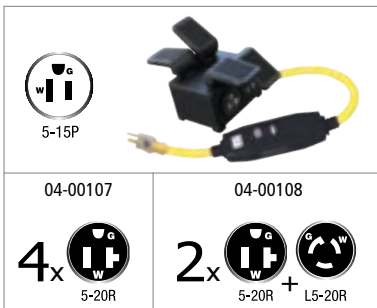






20 AMP QUAD BOX WITH IN-LINE GFCI MODULE PRO SERIES										
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
04-00107	3ft	12/3	STW	Yellow	4	5-15P	4x 5-20R	15	1875	4
04-00108	3ft	12/3	STW	Yellow	4	5-15P	2x 5-20R 2x L5-20R	15	1875	4
• GFCI Protected					• Weather Proof Receptacle Covers					
• NEMA 3R Rated					• 20 AMP Rated GFCI Protection					







Replacement/Power Supply Cords

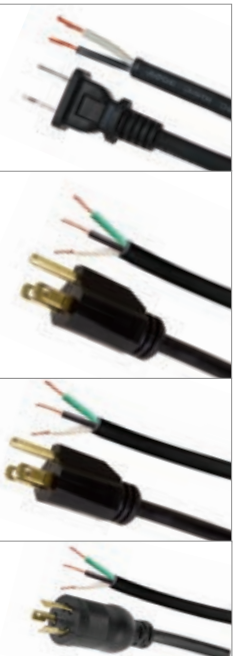ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	POWER RATING AMPS WATTS	PACK QTY
2 CONDUCTOR SJOW REPAIR CORD 							
03-00045	9ft	18/2	SJOW	Black	1-15P	10 1250	25
03-00047	9ft	16/2	SJOW	Black	1-15P	13 1625	25
03-00048	9ft	14/2	SJOW	Black	1-15P	13 1625	20
VINYL 3 CONDUCTOR SJTW REPAIR CORDS 							
03-00030	6ft	14/3	SJTW	Black	5-15P	15 1875	25
03-00031	9ft	14/3	SJTW	Black	5-15P	15 1875	25
03-00032	6ft	16/3	SJTW	Black	5-15P	13 1625	25
03-00033	9ft	16/3	SJTW	Black	5-15P	13 1625	25
RUBBER 3 CONDUCTOR SJ REPAIR CORDS 							
03-00060	9ft	18/3	SJ	Black	5-15P	10 1250	25
03-00062	9ft	16/3	SJ	Black	5-15P	13 1625	25
03-00066	9ft	14/3	SJ	Black	5-15P	15 1875	24
RUBBER 3 CONDUCTOR LOCKING SJ REPAIR CORDS 							
03-00064	9ft	16/3	SJ	Black	L5-20P	13 1625	25






AC Appliance Extension Cords

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
RIGHT ANGLE FLAT SPT-3 APPLIANCE CORDS 								
01-00039	3ft	14/3	Flat SPT-3	Grey	5-15P	5-15R	15 1875	24
01-00040	6ft	14/3	Flat SPT-3	Grey	5-15P	5-15R	15 1875	24
01-00041	9ft	14/3	Flat SPT-3	Grey	5-15P	5-15R	15 1875	18
01-00042	12ft	14/3	Flat SPT-3	Grey	5-15P	5-15R	15 1875	12
01-00043	15ft	14/3	Flat SPT-3	Grey	5-15P	5-15R	15 1875	12
RIGHT ANGLE FLAT SPT-3 APPLIANCE CORDS 								
01-00045	9ft	12/3	Flat SPT-3	Grey	5-20P	5-20R	20 2500	12




Garbage Disposal/Power Supply Cords


ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	POWER RATING AMPS WATTS	PACK QTY
3 CONDUCTOR SPT-3 REPAIR CORDS 							
03-00049	3ft	16/3	SPT-3	Dark Grey	5-15P	13 1625	25
03-00050	6ft	16/3	SPT-3	Dark Grey	5-15P	13 1625	25
03-00051	8ft	16/3	SPT-3	Dark Grey	5-15P	13 1625	25
3 CONDUCTOR RIGHT ANGLE SPT-3 REPLACEMENT CORDS 							
03-00052	3ft	16/3	SPT-3	Dark Grey	5-15P	13 1625	25
03-00054	6ft	16/3	SPT-3	Dark Grey	5-15P	13 1625	25
03-00055	8ft	16/3	SPT-3	Dark Grey	5-15P	13 1625	25

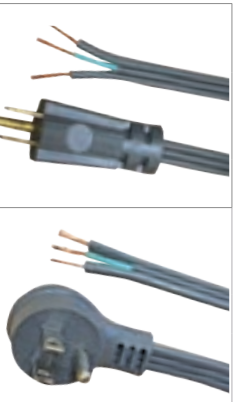



Range and Dryer SRDT Cords


At **Voltec** we stock a full line of 3 and 4 wire SRDT cords manufactured with molded right angle plugs. The 3 wire cords are required for homes built before 1996 and 4 wire for homes built after 1996. Our 3 and 4 wire cords come standard with ring connectors, in your choice of plugs rated from 30–50 amps, and are available in 4 and 6-foot lengths.





3-WIRE 30AMP 125/250V DRYER CORD KITS WITH RING TERMINALS 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	RECEPTACLE TYPE	POWER RATING		PACK QTY
							AMPS	WATTS	
03-00067	4ft	10/3	SRDT	Grey	10-30P	Ring Terminal	30	3750/7500	12
03-00069	6ft	10/3	SRDT	Grey	10-30P	Ring Terminal	30	3750/7500	12





3-WIRE 40AMP 125/250V RANGE CORD KITS WITH RING TERMINALS 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	RECEPTACLE TYPE	POWER RATING		PACK QTY
							AMPS	WATTS	
03-00070	4ft	8/2-10/1	SRDT	Grey	10-50P	Ring Terminal	40	5000/10000	12
03-00072	6ft	8/2-10/1	SRDT	Grey	10-50P	Ring Terminal	40	5000/10000	12





3-WIRE 50AMP 125/250V RANGE CORD KITS WITH RING TERMINALS 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	RECEPTACLE TYPE	POWER RATING		PACK QTY
							AMPS	WATTS	
03-00073	4ft	6/2-8/1	SRDT	Grey	10-50P	Ring Terminal	50	6250/12500	12
03-00075	6ft	6/2-8/1	SRDT	Grey	10-50P	Ring Terminal	50	6250/12500	12




4-WIRE 30AMP 125/250V DRYER CORD KITS WITH RING TERMINALS 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	RECEPTACLE TYPE	POWER RATING		PACK QTY
							AMPS	WATTS	
03-00076	4ft	10/4	SRDT	Black	14-30P	Ring Terminal	30	3750/7500	12
03-00078	6ft	10/4	SRDT	Black	14-30P	Ring Terminal	30	3750/7500	12



4-WIRE 40AMP 125/250V RANGE CORD KITS WITH RING TERMINALS 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	RECEPTACLE TYPE	POWER RATING		PACK QTY
							AMPS	WATTS	
03-00079	4ft	8/2-10/2	SRDT	Black	14-50P	Ring Terminal	40	5000/10000	12
03-00081	6ft	8/2-10/2	SRDT	Black	14-50P	Ring Terminal	40	5000/10000	12



4-WIRE 50AMP 125/250V RANGE CORD KITS WITH RING TERMINALS 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	RECEPTACLE TYPE	POWER RATING		PACK QTY
							AMPS	WATTS	
03-00082	4ft	6/2-8/2	SRDT	Black	14-50P	Ring Terminal	50	6250/12500	12
03-00084	6ft	6/2-8/2	SRDT	Black	14-50P	Ring Terminal	50	6250/12500	12



LIMITED WARRANTY



TEMPORARY POWER



Commercial Power Distribution Center



TEMPORARY POWER BOX - SINGLE PHASE


ITEM PN#	DESCRIPTION	POWER INLET	POWER OUTLET	CIRCUIT BREAKER & GFCI	GFCI	NO. GFCI	RECEPTACLES QTY	RECEPTACLES TYPE	CIRCUIT BREAKER PROTECTED	NEMA
09-00375	Locking	50AMP 125/250V	50AMP 125/250V	3 CB 3 GFCI	Yes No	3	6 1	L5-20R L6-30R	Yes Yes	
09-0T376	U-Ground	50AMP 125/250V	50AMP 125/250V	3 CB 3 GFCI	Yes No	3	6 1	5-20R L6-30R	Yes Yes	
09-00675	Locking	50AMP 125/250V	50AMP 125/250V	6 CB 6 GFCI	Yes No	6	6 1	L5-20R L6-30R	Yes Yes	
09-0T676	U-Ground	50AMP 125/250V	50AMP 125/250V	6 CB 6 GFCI	Yes No	6	6 1	5-20R L6-30R	Yes Yes	

All Units Include:

- Rated For Outdoor Use, Wet and Damp Locations
- 30 Amp 250V Receptacle Circuit Breaker protected
- Circuit breaker Protection for ALL outlets
- GFCI comes with Auto Monitoring Function - **NEW**
- Six (6) 20 Amp Outlets Circuit Breaker protected
- 50 Amp Inlet and Outlet Recessed for Safety
- Weatherproof covers on all outlets, inlets and circuit breaker panel
- Repair parts & service available in California. See Page 30.

09-00375 - Locking
09-0T376 - U-Ground T-Slot

Three (3) Auto Reset GFCI Modules
Three (3) Circuit Breaker Protection
Six (6) 20 Amp Receptacles

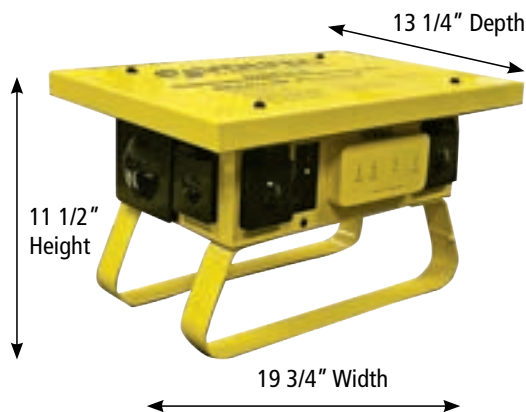

09-00675 - Locking
09-0T676 - U-Ground T-Slot

Six (6) Auto Reset GFCI Modules
Six (6) Circuit Breaker Protection
Six (6) 20 Amp Receptacles



NEMA 3R Rated For Outdoor Use • Wet and Damp Locations
CETLUS Intertek Listed 5000285
Conforms to UL STD. 508
CERTIFIED to CSA STD. C22.2 NO. 14



Temporary Power Cords



VINYL TEMPORARY POWER CORDS -40° TO 140°F

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
09-00214	50ft	6/3-8/1	STOW	Black	1	50AMP	50AMP	50	12500	1
09-00215	100ft	6/3-8/1	STOW	Black	1	50AMP	50AMP	40	10000	1



TEMPORARY POWER CORDS -58° TO 228°F

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
09-00431	50ft	6/3-8/1	SEOW	Black	1	50AMP	50AMP	50	12500	1
09-00432	100ft	6/3-8/1	SEOW	Black	1	50AMP	50AMP	40	10000	1



VINYL TEMPORARY "Y" ADAPTER -40° TO 140°F

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
09-00435	2ft	6/3-8/1	STOW	Black	2	50AMP	50AMP	50	12500	1



EMERGENCY RESPONSE STOW CORD -40° TO 140°F

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS	WATTS	PACK QTY
09-00437	10ft	6/3-8/1	STOW	Black	1	14-50P	50AMP	50	12500	2



Temporary LED Area Lighting

IES Photometric File Available Upon Request for All LED Area Lights



9,000 LUMEN (75W) LED TEMPORARY AREA WORK LIGHT

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	INPUT VOLTAGE	TOTAL LUMEN	PLUG/REC TYPE	SURGE PROTECTION	LED LIFESPAN	PACK QTY
08-00410	5ft	16/3	SJTW	Black	120/277V AC 50-60Hz	9,000	5-15	6,000 Volt	50,000 Hours	2

- 5-15 Receptacle To Connect Additional Lights
- 5000 Kelvin Color Temperature
- Heavy Duty Metal Spring Hook with Inset Fitting
- Stainless Steel Guard
- Rugged Die-Cast Aluminum Heat Sink
- Suitable For Covered Damp Locations



12,000 LUMEN (100W) HEX-FLEX LED TEMPORARY AREA WORK LIGHT

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	INPUT VOLTAGE	TOTAL LUMEN	PLUG/REC TYPE	SURGE PROTECTION	LED LIFESPAN	PACK QTY
08-00418	10ft	14/3	SJTW	Black	120/277V AC 50-60Hz	12,000	5-15	6,000 Volt	50,000 Hours	2

- 6 Adjustable Light Panels (0-45-90 Degree Angles)
- 5-15 Receptacle To Connect Additional Lights
- 5000 Kelvin Color Temperature
- Heavy Duty Metal Spring Hook
- Stainless Steel Guard
- Suitable For Covered Damp Locations





Temporary LED Area Lighting

14,000 LUMEN (100W) LED TEMPORARY AREA WORK LIGHT

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	INPUT VOLTAGE	TOTAL LUMEN	PLUG/REC TYPE	SURGE PROTECTION	LED LIFESPAN	PACK QTY
08-00420	3ft	18/3	SJTW	Black	120V/277V AC 50-60Hz	14,000	5-15	4,000 Volt	50,000 Hours	2

- 5-15 Receptacle To Connect Additional Lights
- 5000 Kelvin Color Temperature
- Heavy Duty Metal Spring Hook
- Powder Coated Steel Wire Guard
- Rugged Die-Cast Aluminum Heat Sink
- Suitable For Covered Damp Locations



15,000 LUMEN (100W) LED TEMPORARY AREA WORK LIGHT

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	INPUT VOLTAGE	TOTAL LUMEN	PLUG/REC TYPE	SURGE PROTECTION	LED LIFESPAN	PACK QTY
08-00460	10ft	14/3	SJTW	Black	120/277V AC 50-60Hz	15,000	5-15	6,000 Volt	50,000 Hours	2

- 5-15 Receptacle To Connect Additional Lights
- 150 Lumen per Watt
- 5000 Kelvin Color Temperature
- Stainless Steel Protective Guard
- Foldable Heavy Duty Metal Spring Hook
- Rugged Die-Cast Aluminum Heat Sink
- Suitable For Covered Damp Locations



22,500 LUMEN (150W) LED TEMPORARY AREA WORK LIGHT

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	INPUT VOLTAGE	TOTAL LUMEN	PLUG/REC TYPE	SURGE PROTECTION	LED LIFESPAN	PACK QTY
08-00461	10ft	14/3	SJTW	Black	120/277V AC 50-60Hz	22,500	5-15	6,000 Volt	50,000 Hours	2

- 5-15 Receptacle To Connect Additional Lights
- 150 Lumen per Watt
- 5000 Kelvin Color Temperature
- Stainless Steel Protective Guard
- Foldable Heavy Duty Metal Spring Hook
- Rugged Die-Cast Aluminum Heat Sink
- Suitable For Covered Damp Locations



30,000 LUMEN (200W) LED TEMPORARY AREA WORK LIGHT

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	INPUT VOLTAGE	TOTAL LUMEN	PLUG/REC TYPE	SURGE PROTECTION	LED LIFESPAN	PACK QTY
08-00462	10ft	14/3	SJTW	Black	120/277V AC 50-60Hz	30,000	5-15	6,000 Volt	50,000 Hours	2

- 5-15 Receptacle To Connect Additional Lights
- 150 Lumen per Watt
- 5000 Kelvin Color Temperature
- Stainless Steel Protective Guard
- Foldable Heavy Duty Metal Spring Hook
- Rugged Die-Cast Aluminum Heat Sink
- Suitable For Covered Damp Locations




18,000 LUMEN (150W) LED LOCKING TEMPORARY AREA WORK LIGHT

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	INPUT VOLTAGE	TOTAL LUMEN	PLUG/REC TYPE	SURGE PROTECTION	LED LIFESPAN	PACK QTY
08-00417	10ft	14/3	SJTW	Black	120/277V AC 50-60Hz	18,000	L5-20	10,000 Volt	50,000 Hours	2

- L5-20 Receptacle To Connect Additional Lights
- 5000 Kelvin Color Temperature
- Heavy Duty Metal Spring Hook
- Stainless Steel Guard
- Rugged Die-Cast Aluminum Heat Sink
- Suitable For Covered Damp Locations





Temporary LED Light Strings



LED MODULE LIGHT STRING 8,000 LUMEN (65W) OR 16,000 LUMEN (130W)

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	MODULE WATTS	MODULES	PLUG TYPE	RECEPTACLE TYPE	TOTAL LUMEN	KELVIN RATING	PACK QTY
08-00507	50ft	16/3	SJTW	Yellow	13	5	5-15P	5-15R	8,000	5000	4
08-00508	100ft	16/3	SJTW	Yellow	13	10	5-15P	5-15R	16,000	5000	2

- 1,600 Lumen Per Module • 123 Lumen Per Watt • Metal Carabiner Hook and Magnet Included
- 5-15 Plug • 5-15 Receptacle to Connect Additional Lights • High Impact Poly Carbonate Lens
- 10 Feet Between Light Modules • No Bulbs or Lamps to Replace • Suitable for Wet Locations



LED MODULE LIGHT STRING 12,500 LUMEN (95W) OR 25,000 LUMEN (190W)

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	MODULE WATTS	MODULES	PLUG TYPE	RECEPTACLE TYPE	TOTAL LUMEN	KELVIN RATING	PACK QTY
08-00504	50ft	16/3	SJTW	Yellow	19	5	5-15P	5-15R	12,500	5000	4
08-00505	100ft	16/3	SJTW	Yellow	19	10	5-15P	5-15R	25,000	5000	2

- 2,500 Lumen Per Module • Metal Carabiner Hook and Magnet Included
- 5-15 Plug • 5-15 Receptacle to Connect Additional Lights • High Impact Poly Carbonate Lens
- Corrosion Resistant Power Coated Metal Guard • No Bulbs or Lamps to Replace • Suitable for Wet Locations



U-GROUND LIGHT STRINGS WITH PLASTIC CAGE

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	BULB WATTS	SOCKETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
08-00188	100ft	14/2	SJTW	Yellow	150	10	1-15P	N/A	13 1625	1
08-01187	50ft	14/3	SJTW	Yellow	150	5	5-15P	5-15R	15 1875	1
08-01188	100ft	14/3	SJTW	Yellow	150	10	5-15P	5-15R	13 1625	1
08-00189	50ft	12/3	SJTW	Yellow	150	5	5-15P	5-15R	15 1875	1
08-00190	100ft	12/3	SJTW	Yellow	150	10	5-15P	5-15R	15 1875	1
08-00194	100ft	12/3	STW	Yellow	150	10	5-15P	5-15R	15 1875	1



U-GROUND LIGHT STRINGS WITH METAL CAGE

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	BULB WATTS	SOCKETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
08-00197	50ft	12/3	SJTW	Yellow	150	5	5-15P	5-15R	15 1875	1
08-00198	100ft	12/3	SJTW	Yellow	150	10	5-15P	5-15R	15 1875	1



LOCKING LIGHT STRING WITH PLASTIC CAGE


ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	BULB WATTS	SOCKETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS	PACK QTY
08-00192	100ft	12/3	SJTW	Yellow	150	10	L5-20P	L5-20R	15 1875	1



Handheld LED Lights

220 LUMEN (3W) LED ALUMINUM PEN LIGHT

ITEM PN#	LUMEN	BATTERY TYPE	PACK QTY
08-00617HD	220	(3x) AAA Included	6
• High Power COB LED		• Heavy Duty Aluminum Housing	
• Heavy Duty Magnetic Pocket Clip		• Sold in Clamshell PDQ Display	

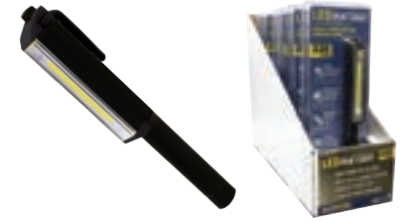

250 LUMEN (3W) RECHARGEABLE LED ALUMINUM PEN LIGHT

ITEM PN#	LUMEN	BATTERY TYPE	RUN TIME in HOURS	PACK QTY
08-00612	250	600mAh Li-ion	2.5hrs-High 4.5hrs-Low Torch 5.5hrs	6
• High Power LED 3W COB Body & 2W Torch		• Aluminum Alloy Body		
• Magnetic Pocket Clip and Pen Base		• USB Port and Charging Cable		



450 LUMEN (5W) LED LIGHT WITH MAGNETIC ROD

ITEM PN#	LUMEN	BATTERY TYPE	PACK QTY
08-00602	450	(3x) AA Included	6
• High Power COB LED		• Super Strong Magnetic Base	
• Extendable (to 14 3/4") Metal Rod with Magnetic End Sold in Clamshell PDQ Displays			
• 3 Modes of Light - 450 Lumen Head Light (White, Red, SOS Red , 200 Lumen Spot Light)			



850 LUMEN (10W) LED RECHARGEABLE FLASH LIGHT

ITEM PN#	LUMEN	BATTERY TYPE	RUN TIME in HOURS	PACK QTY
08-00607	850	Li-Ion Rechargeable	2hrs-High 4hrs-Low	6
• High Performance SMD LED • Brightness - High-850 Lumen, Low-425 Lumen		• Power Bank to Charge other Devices		
• Twist to Focus Light		• Heavy Duty Pocket Clip		
• USB Charging Cord				



1,100 LUMEN (15W) LED RECHARGEABLE FLASH LIGHT

ITEM PN#	LUMEN	BATTERY TYPE	RUN TIME in HOURS	PACK QTY
08-00608	1,100	Li-Ion Rechargeable	3hrs-High 4hrs-Med 5hrs-Low	6
• High Performance SMD LED • Brightness - High-1,100 Lumen, Med-700 Lumen, Low-500 Lumen				
• Press and hold 3 seconds for STROBE				
• Light Weight Durable Aluminum Housing		• 10" Light Shaft & Non-Slip Handle		
• Indicator Light & USB Charging Cable		• Sold in Full Color Box		





Hands-Free LED Head Lamps



120 LUMEN (3W) HIGH POWER HANDS-FREE LED HEAD LAMP

ITEM PN#	LUMEN	BATTERY TYPE	PACK QTY
08-00692	120	(3x) AAA (Included)	6
<ul style="list-style-type: none"> • Super Bright 3W COB LED • 3 Light Settings (Hi/Low/Flashing) • Super Bright White Light with Low Heat Output 		<ul style="list-style-type: none"> • Adjustable Head Lamp for Light Direction • Uses 3 AAA Replaceable Batteries • Average Run-Time on High - 3 Hrs 	



600 LUMEN (5W) MULTI-PURPOSE HANDS-FREE LED HEAD LAMP

ITEM PN#	LUMEN	BATTERY TYPE	PACK QTY
08-00693	600	(3x) AAA (Included)	6
<ul style="list-style-type: none"> • 5 Light Settings (Hi/Med/Low/Flash/SOS) • 4 Color Light Filters • Aerospace Grade Aluminum Body • Super Bright White Light with Low Heat Output 		<ul style="list-style-type: none"> • Barrel Attachment • Heavy Duty Adjustable Head Strap • Adjustable Settings for Light Direction 	



325 LUMEN (3W) LED RECHARGEABLE HEAD LAMP WITH SENSOR FUNCTION

ITEM PN#	LUMEN	BATTERY TYPE	PACK QTY
08-00605	325	Li-Ion Rechargeable	6
<ul style="list-style-type: none"> • Super Bright High Power 3W COB LED • 3 Light Settings (Hi/Low/Strobe) • Non-Slip Headband for Hard Hats 		<ul style="list-style-type: none"> • 12 inch USB Charging Cable • Motion Sensor Function • Average Run-Time on High - 3 Hrs 	



400 LUMEN (5W) RECHARGEABLE LED HEAD LAMP & BACK LAMP

ITEM PN#	LUMEN	BATTERY TYPE	PACK QTY
08-00606	400	Li-Ion Rechargeable	6
<ul style="list-style-type: none"> • 5 Watt Head Light & 3 Watt Back Light • Back White Light -3 Light Settings (Hi/Med/Low) • Back Red Light -2 Light Settings (Red/Red Flashing) 		<ul style="list-style-type: none"> • 3 Light Settings (Hi/Low/Strobe) • Non-Slip Headband for Hard Hats • 20 inch USB Charging Cable 	



LED Portable Work Lights

1,000 LUMEN (10W) RECHARGEABLE LED WORK LIGHT

ITEM PN#	LUMEN	BATTERY TYPE	LED LIFE SPAN	RUN TIME ON HIGH	CHARGE TIME	PACK QTY
08-00598	1,000	Lithium Rechargeable	50,000 hours	Full-3hrs/Half-6hrs	4hrs	2
• 10 Watt High Power LED		• 2 Light Settings - Full 360° or Half 180° Degree of Light				
• Lithium Rechargeable Battery		• 4-Piece Super Strong Magnetic Base				
• Metal Cage Guard & Handle w/Comfort Grip		• USB Charging Port with Charging Cable				
• Charge from Port to Other Devices		• On/Off Switch		• Suitable for Covered Damp Locations		



1,800 LUMEN (20W) RECHARGEABLE LED PORTABLE WORK LIGHT

ITEM PN#	LUMEN	BATTERY TYPE	LED LIFE SPAN	RUN TIME	CHARGE TIME	PACK QTY
08-00601	1,800	Li-Ion Rechargeable	50,000 hours	Hi-5hrs/Lo-8hrs	8hrs	2
• 20 Watt High Power LED		• USB Charging Port with 24 inch USB Charging Cable				
• 1,000 Lumen on Low		• Light Weight with Multi-Positional Head				
• Charge from Port to Other Devices		• On/Off Switch				
• Tough Wear ABS and Aluminum Housing		• Suitable for Covered Damp Locations				



3,000 LUMEN (30W) RECHARGEABLE LED PORTABLE WORK LIGHT

ITEM PN#	LUMEN	BATTERY TYPE	LED LIFE SPAN	RUN TIME	CHARGE TIME	PACK QTY
08-00599	3,000	Li-Ion Rechargeable	50,000 hours	Hi-3hrs/Lo-6hrs	6-7hrs	2
• 30 Watt High Power LED		• Tough Wear ABS and Aluminum Housing				
• High and Low Settings		• H-Base with Adjustable Lamp Head				
• High/Low Push Switch		• USB Charging Port with 39" Charging Cable				



4,400 LUMEN (44W) AC LED PORTABLE WORK LIGHT



ITEM PN#	LUMEN	CORD LENGTH	GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	LED LIFE SPAN	PACK QTY
08-00731	4,400	3ft	18/3	SJTW	Black	5-15P	50,000 hours	2
• 44 Watt High Power DOB LED		• Rugged Die Cast Aluminum Housing						
• Tool-Free Quick Head Adjustment		• Folds for Compact Storage						
• On/Off Switch								



6,600 LUMEN (66W) AC LED PORTABLE WORK LIGHT



ITEM PN#	LUMEN	CORD LENGTH	GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	LED LIFE SPAN	PACK QTY
08-00732	6,600	3ft	18/3	SJTW	Black	5-15P	50,000 hours	2
• 66 Watt High Power DOB LED		• USB Charging Port						
• Tool-Free Quick Head Adjustment		• Rugged Die Cast Aluminum Housing						
• On/Off Switch		• Folds for Compact Storage						





SCAN TO WATCH VIDEO

LIMITED WARRANTY




LED Tripod Work Lights




6,600 LUMEN (68W) AC LED TRIPOD WORK LIGHT cUL^{us}

ITEM PN#	LUMEN	CORD LENGTH	GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	LED LIFE SPAN	PACK QTY
08-00733	6,600	5ft	18/3	SJTW	Black	5-15P	50,000 hours	2
<ul style="list-style-type: none"> • 68 Watt High Power DOB LED • Quick Release 2 in 1 Feature Removable H-Base • Tool-Free Quick Head Adjustment • Extendable Tripod with Extension Leg • On/Off Switch 				<ul style="list-style-type: none"> • USB Charging Port to Charge Other Devices • Storage Bag for Charging Devices & Small Tools • Rugged Die Cast Aluminum Housing • 5,000 Kelvin Rating • 2,500 Volt Surge Protection 				

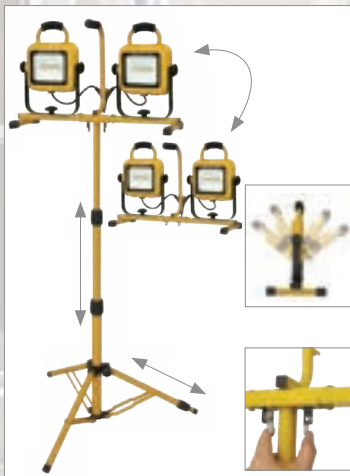

8,800 LUMEN (88W) AC DUAL LED TRIPOD WORK LIGHT cUL^{us}

ITEM PN#	LUMEN	CORD LENGTH	GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	LED LIFE SPAN	PACK QTY
08-00734	8,800 (2 x 4,400)	5ft	18/3	SJTW	Black	5-15P	50,000 hours	2
<ul style="list-style-type: none"> • 88 Watt High Power DOB LED • Quick Release 2 in 1 Feature Removable H-Base • Tool-Free Quick Head Adjustment • Extendable Tripod with Extension Leg 				<ul style="list-style-type: none"> • On/Off Switch • Rugged Die Cast Aluminum Housing • 5,000 Kelvin Rating • 2,500 Volt Surge Protection 				

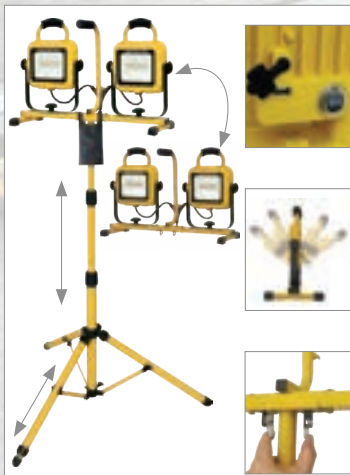

13,200 LUMEN (132W) AC DUAL LED TRIPOD WORK LIGHT cUL^{us}

ITEM PN#	LUMEN	CORD LENGTH	GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	LED LIFE SPAN	PACK QTY
08-00735	13,200 (2 x 6,600)	5ft	18/3	SJTW	Black	5-15P	50,000 hours	2
<ul style="list-style-type: none"> • 132 Watt High Power DOB LED • Quick Release 2 in 1 Feature Removable H-Base • Tool-Free Quick Head Adjustment • Extendable Tripod with Extension Leg • On/Off Switch 				<ul style="list-style-type: none"> • USB Charging Port to Charge Other Devices • Storage Bag for Charging Devices & Small Tools • Rugged Die Cast Aluminum Housing • 5,000 Kelvin Rating • 2,500 Volt Surge Protection 				



Halogen Work Lights

500 WATT HALOGEN PORTABLE WORK LIGHT

ITEM PN#	MAX WATTAGE	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	ON/OFF SWITCH	PACK QTY
08-00209	500	1ft	18/3	SJTW	Black	5-15P	No	4
• S-Style Base				• Bulb(s) Included				
• Replacement Bulbs Available - See Page 30								




500 WATT HALOGEN PORTABLE WORK LIGHT WITH LOCKING PLUG

ITEM PN#	MAX WATTAGE	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	ON/OFF SWITCH	PACK QTY
08-00219	500	3ft	16/3	SJTW	Black	L5-20P	No	6
• S-Style Base				• Insulated Foam Handles				
• Bulb(s) Included				• Replacement Bulbs Available - See Page 30				



1,000 WATT HALOGEN TRIPOD WORK LIGHT

ITEM PN#	MAX WATTAGE	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	ON/OFF SWITCH	PACK QTY
08-00211	1,000	4ft	18/3	SJTW	Black	5-15P	Yes	2
• Extendable Tripod				• On/Off Switch				
• Bulb(s) Included				• Replacement Bulbs Available - See Page 30				

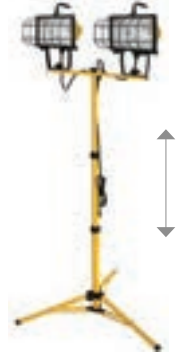

Heavy Duty Halogen Work Lights

500 WATT HEAVY DUTY HALOGEN PORTABLE WORK LIGHT


ITEM PN#	MAX WATTAGE	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	ON/OFF SWITCH	PACK QTY
08-00609	500	3ft	18/3	SJTW	Black	5-15P	Yes	6
• H-Base Design with Heavy Duty Face Frames				• Insulated Foam Handles				
• Bulb(s) Included				• Replacement Bulbs Available - See Page 30				



1,000 WATT HEAVY DUTY HALOGEN TRIPOD WORK LIGHT


ITEM PN#	MAX WATTAGE	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	PLUG TYPE	ON/OFF SWITCH	PACK QTY
08-00611	1,000	5ft	18/3	SJTW	Black	5-15P	Yes	2
• Extendable Tripod				• H-Base Design				
• Tripod Features 2 in 1 Removable H-Base				• Insulated Foam Handles				
• Heavy Duty Face Frames				• Bulb(s) Included				
• Replacement Bulbs Available - See Page 30								

2 in 1 FEATURE
Removable H-Base

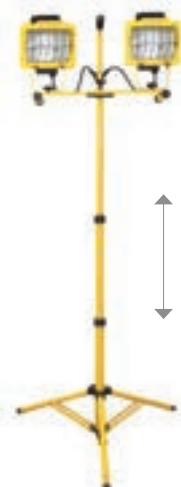


Incandescent Trouble Lights




METAL SHADE WORK LIGHT WITH OUTLET IN HANDLE 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	BULB RATING	PACK QTY
08-00184	25ft	16/3	SJT	Yellow	1	5-15P	5-15R	75	4




METAL SHADE WORK LIGHT WITH OUTLET IN HANDLE 									
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	BULB RATING	PACK QTY
08-00185	50ft	16/3	SJT	Yellow	1	5-15P	5-15R	75	6

Retractable Cord Reels



RETRACTABLE CORD REEL WITH 10 WATT LED WORK LIGHT 												
ITEM PN#	LUMEN	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING	AMPS	WATTS	PACK QTY
07-00260	1,200	50ft	16/3	SJTW	Yellow	1	5-15P	5-15R	10	1250		2
<ul style="list-style-type: none"> • 7.8 Amp Outlet in Handle • Magnet on Light 						<ul style="list-style-type: none"> • Dual Hanging Hooks • Circuit Breaker Protected 						




3-OUTLET RETRACTABLE REELS 												
ITEM PN#	REEL TYPE	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING	AMPS	WATTS	PACK QTY
07-00283	3	50ft	14/3	SJTW	Yellow	3	5-15P	5-15R	13	1625		2
07-00284	3	50ft	12/3	SJTW	Yellow	3	5-15P	5-15R	15	1875		2
<ul style="list-style-type: none"> • 3-Way Wall/Ceiling/Bench Mount • 5-Locking Positions • Convenient Carry Handle 						<ul style="list-style-type: none"> • Mounting Hardware Included • 3-Outlet Power Block • Resettable Circuit Breaker 						



Workbench Cord



3-CONDUCTOR WORKBENCH SJTW EXTENSION CORD 											
ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING	AMPS	WATTS	PACK QTY
02-00034	10ft	16/3	SJTW	Black	1	5-15P	5-15R	13	1625		24



Surge & Power Strips

6-OUTLET POWER STRIP



ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	POWER RATING AMPS WATTS		PACK QTY
11-00223	6ft	14/3	SJT	Ash	6	5-15P	5-15R	15	1875	12



6-OUTLET POWER STRIPS WITH SURGE PROTECTION

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	JOULES	PACK QTY
11-00225	4ft	14/3	SJT	Grey	6	5-15P	5-15R	750	12



6-OUTLET POWER STRIPS WITH SURGE PROTECTION

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	JOULES	PACK QTY
11-00226	6ft	14/3	SJT	Yellow	6	5-15P	5-15R	1050	6



8-OUTLET POWER STRIP WITH SURGE PROTECTION

ITEM PN#	CORD LENGTH	WIRE GAUGE	WIRE TYPE	WIRE COLOR	OUTLETS	PLUG TYPE	RECEPTACLE TYPE	JOULES	PACK QTY
11-00227	6ft	14/3	SJT	Yellow	8	5-15P	5-15R	1050	6





Wiring Devices

We carry Bryant, Maritco and Leviton product. For manufacturer's cross reference, see page 29.

THERMAL PLASTIC HOUSING




ITEM PN#	PLUG/RECEPTACLE	TYPE	MATERIAL	PLUG/RECEPTACLE	PACK QTY
12-00244	Plug	5-15P	PVC		10
12-00245	Receptacle	5-15R	PVC		10



RUBBER WET GUARD® HOUSING

ITEM PN#	PLUG/RECEPTACLE	TYPE	MATERIAL	PLUG/RECEPTACLE	PACK QTY
12-00344L	Receptacle	5-15R	Rubber/Nylon		10
12-00345L	Plug	5-15P	Rubber/Nylon		10

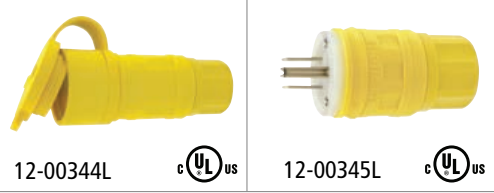

NYLON MALE PLUGS



ITEM PN#	PLUG	POWER RATING AMPS	MATERIAL	NEMA	PACK QTY
12-00223	1-15P	15	Nylon		10
12-00225	5-15P	15	Nylon		10
12-00227	5-20P	20	Nylon		10
12-00229	L5-20P	20	Nylon		10
12-00231	L6-20P	20	Nylon		10
12-00233	L5-30P	30	Nylon		10
12-00235	L6-30P	30	Nylon		10
12-00237	L14-20P	20	Nylon		10
12-00239	L14-30P	30	Nylon		10
12-00242 (CS6365)	50AMP	50	Nylon		1
12-00244	5-15P	15	Nylon		10

NYLON FEMALE CONNECTORS



ITEM PN#	RECEPTACLE	POWER RATING AMPS	MATERIAL	NEMA	PACK QTY
12-00224	1-15R	15	Nylon		10
12-00226	5-15R	15	Nylon		10
12-00228	5-20R	20	Nylon		10
12-00230	L5-20R	20	Nylon		10
12-00232	L6-20R	20	Nylon		10
12-00234	L5-30R	30	Nylon		10
12-00236	L6-30R	30	Nylon		10
12-00238	L14-20R	20	Nylon		10
12-00240	L14-30R	30	Nylon		10
12-00243 (CS6364)	50AMP	50	Nylon		1
12-00245	5-15R	15	Nylon		10



ADDITIONAL PARTS AVAILABLE ON SPECIAL REQUEST

Wiring Device - Cross Reference

Thermal Plastic Housing			
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#
12-00244B	5965B		
12-00245B	5969B		

Rubber Wet Guard® Housing			
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#
12-00344L			163-15W47
12-00345L			163-14W47

Nylon Plugs			
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#
12-00223	9754NS		000-115PV
12-00225	5266N	5266	061-5266-00C
12-00227	5366NP	5366	061-5366-00C
12-00229	70520NP	205P	061-02311-000
12-00231	70620NP	206P	061-02321-000
12-00233	70530NP	305P	061-02611-000
12-00235	70630NP	306P	061-02621-000
12-00237	71420NP	2014P	061-02411-000
12-00239	71430NP	3014P	061-02711-000
12-00242		CS6365N	
12-00242V			
12-00244YL			000-515PV-000 Yellow
12-00244BL			000-515PR-000

Nylon Female Connectors			
VOLTEC PN#	BRYANT PN#	MARINCO PN#	LEVITON PN#
12-00224	9755N		000-115CV
12-00226	5269NC	5269	061-05269-00C
12-00228	5369NC	5369	061-05369-00C
12-00230	70520NC	205C	065-02313-000
12-00232	70620NC	206C	065-02323-000
12-00234	70530NC	305C	165-02613-000
12-00236	70630NC	306C	165-C2623-000
12-00238	71420NC	2014C	165-02413-000
12-00240	71430NC	3014C	165-02713-000
12-00243		CS6364N	
12-00243V			
12-00245YL			000-515CV-000 Yellow
12-00245BL			000-515CR-000

Replacement Parts

LED Temporary Light String Replacement Parts

ITEM PN#	DESCRIPTION	PACK QTY
08-00502	5 Pack Replacement Carabiner Hooks	10
08-00503	5 Pack Replacement Magnets	10



Replacement Bulbs

ITEM PN#	DESCRIPTION	BULB RATING	PACK QTY
08-00024	800 Lumen LED Bulb - 25,000 hour Lifespan 100 Lumen per Watt	8W	1/50
Q500T3/CL	500W Halogen Bulb	500W	25/250



LIGHT STRING REPLACEMENT CAGES


ITEM PN#	DESCRIPTION	PACK QTY
08-00203	Plastic Cage for Light String	20
08-00204	Metal Cage for Light String	20



Replacement Parts

REPLACEMENT PARTS

Part No.	Description (Common to both Box's)
BCB20ASP	20 AMP Single Pole Circuit Breaker
BCB30ADP	30 AMP Double Pole Circuit Breaker
12-00367V	250V L6-30R Receptacle
12-00368V	50 Amp Inlet Receptacle (CS6375)
12-00369V	50 Amp Outlet Receptacle (CS6369)
12-00366V	L5-20R Receptacle
12-00434V	5-20 Receptacle
TR09-01204	Plastic "OUT" 50 Amp Cover
TR09-01205	Plastic "IN" 50 Amp Cover
TR09-01206	Plastic "30 Amp" Outlet Cover
TR09-01207	Plastic "20 Amp" Outlet Cover
TR09-01263	GFCI - Auto Reset, Auto Monitoring

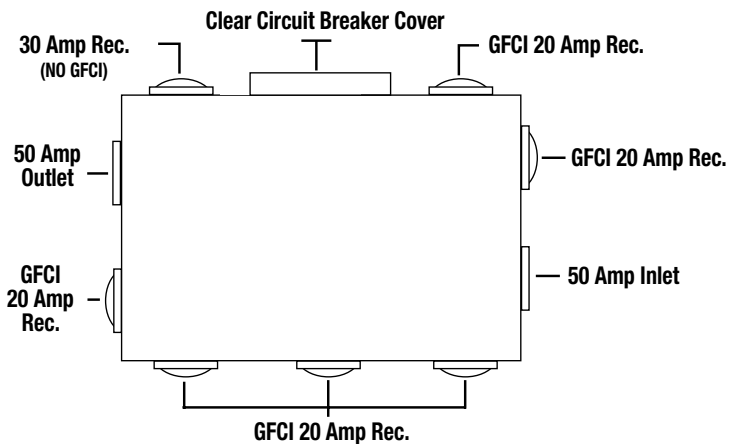

Replacement PN#s for (3) GFCI T-BOX™

TR09-01201	Roof for T-BOX™
TR09-01209	Legs for T-BOX™
TR09-01208	Metal Cover for Circuit Breaker Switches

Replacement PN#s for (6) GFCI T-BOX™

TR09-01261	Roof for T-BOX™
TR09-01269	Legs for T-BOX™
TR09-01268	Metal Cover for Circuit Breaker Switches

Check Out Voltec's Product Videos!


SCAN TO WATCH VIDEO



**ALL-WEATHER
EXTENSION CORDS**



**TEMPORARY
LED LIGHT STRINGS**



**LED PORTABLE/
TRIPOD
WORK LIGHTS**



E-ZEELOCK®
LOCKING CONNECTOR



Construction Sites | Specialty Workshops | Convention Centers | Emergency Stadiums | Entertainment Industry | Jobsites | Electrical Shops

NEMA Chart

**2 Pole,
2 Wire**

VOLTAGE	LINE#	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
		CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V	1										
250V	2										

**2 Pole,
3 Wire,
Grounding**

VOLTAGE	LINE#	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
		CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V	5										
250V	6										
277V	7										

**3 Pole,
3 Wire**

VOLTAGE	LINE#	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
		CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V/250V	10										
3 ϕ 250V	11										

**3 Pole,
3 Wire,
Grounding**

VOLTAGE	LINE#	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
		CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V/250V	14										
3 ϕ 250V	15										

**4 Pole,
4 Wire**

VOLTAGE	LINE#	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
		CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
3 ϕ 120/208V	18										

**Locking
Plugs and
Receptacles**

VOLTAGE	LINE#	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
		CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG	CONNECTOR	PLUG
125V	L1										
250V	L2										
125V	L5										
250V	L6										
277V, A.C.	L7										
480V	L8										
600V	L9										
125V/250V	L14										

Glossary of Terms

Conductor Color Codes

Function	NA - North America (US/Canada)	IEC - International
L = Line (Hot)	Black	Brown
N = Neutral	White	Light Blue
E = Earth (Ground)	Green or Green/Yellow	Green/Yellow
4th Conductor	Red	-
5th Conductor	Yellow	-
6th Conductor	Orange	-

Technical Data

Full Load Current Values

Current Values Based on Usual Speed and Normal Torque

For full load currents of 206V and 200V motors, increase corresponding 220V value above by 6% and 10% respectively.

Motor Horse Power AC	Rated Motor Voltage – 110V to 120V			Rated Motor Voltage – 220V to 240V		
	Direct Current	Single- Phase AC	Three-Phase (Induction) AC	Direct Current	Single- Phase AC	Three-Phase (Induction)
.252.9	Amps 5.8 Amps		-	1.5 Amps	2.9 Amps	-
.33	3.6	7.2	-	1.8	3.5	-
.25	5.2	9.8	4.0 Amps	2.6	4.9	2.0 Amps
3.4	7.4	13.8	5.6	3.7	6.9	2.8
1	9.4	16.0	7.2	4.7	8.0	3.6
1.5	13.2	20.0	10.4	6.6	10.0	5.2
2	17.0	24.0	13.6	8.5	12.0	6.8
3	25.0	34.0	-	12.2	17.0	9.6
5	40.0	56.0	-	20.0	28.0	15.2
7.5	58.0	80.0	-	29.0	40.0	22.0
10	76.0	100.0	-	38.0	50.0	28.0

Current Carrying Capacity of Flexible Cords

Based on Ambient Temperature of 30°C (86°F)

Amperage shown is for not more than three conductors in a cord. If cord has from four to six conductors, decrease the values shown.

†The ampacities under subheading A are applicable to three-conductor cords and four-conductor cords with three conductors carrying current. The ampacities under subheading B are applicable to two-conductor cords and three-conductor cords with two conductors carrying current.

AWG Wire Size	Thermoplastic Types ST, STO, SJT, SJTO SVT, SVTO, SPT		Types HPD, HPN, HSJ HSO
	A†	B†	
18	7 Amps	10 Amps	10 Amps
17	-	-	12
16	10	13	15
14	15	18	20
12	20	25	30
10	25	30	35
8	35	40	-
6	45	55	-

NOTE: On extension cords over 50 feet, derate by two wire sizes.

Glossary of Terms

Amperage Ratings for Metric Copper

Copper Size mm ³	ETSA	Western European*
0.50	3.0 Amps	6.0 Amps
0.75	7.5	10.0
1.00	10.0	12.0
1.50	15.0	16.0
2.50	20.0	20.0

*General use ratings only. Check with appropriate approval agency for specific applications, as ratings vary from country to country.

Glossary of Terms

AWG	Abbreviation for American Wire Gauge.	Capacitance	The ability of a dielectric material between conductors to store electricity when a difference of potential exists between the conductors. The unit of measurement is the farad, which is the capacitance value that will store a charge of one coulomb when a one-volt potential difference exists between the conductors. In AC, one farad is the capacitance value that will permit one ampere of current when the voltage across the capacitor changes at a rate of one volt per second.
AWM	Designation for appliance wiring material.	Circuit (Electric)	The complete path of an electrical current. When the continuity is broken, it is called an open circuit; when continuity is maintained, it is called a closed circuit.
Alternating Current	Electric current that continually reverses its direction. It is expressed in cycles per second (hertz of Hz).	Clamp	To hold the current or voltage at a specific fixed level.
Ambient Temperature	The temperature of a medium (gas or liquid) surrounding the object.	Cold Flow	Permanent deformation of the insulation due to mechanical force or pressure (not due to heat softening).
American Wire Gauge (AWG)	A standard system for designating wire diameter. Also referred to as the Brown and Sharpe (B&S) wire gauge.	Color Code	A system for circuit identification through use of solid colors and contrasting tracers.
Ampacity	(See Current Carrying Capacity).	Compound	An insulating or jacketing material made by mixing two or more ingredients.
Ampere	The unit of current. One ampere is the current flowing through one ohm of resistance at one volt potential.	Concentricity	In a wire or cable, the measurement of the location of the center of the conductor with respect to the geometric center of the surrounding insulation.
Anneal	Relief of mechanical stress through heat and gradual cooling. Annealing copper renders it less brittle.	Conductor	An insulated wire suitable for carrying electrical current.
Audio Frequency	the range of frequencies audible to the human ear. Usually 20-20,000 Hz.	Contacts	The parts of the connector that actually carry the electrical current, and are touched together or separated to control the flow.
Basic Protection	A commonly used industry term for partial surge protection, usually a single MOV protecting line-to-neutral (see Full Protection).		
Braid	A fibrous or metallic group of filaments interwoven in cylindrical form to form a covering over one or more wires.		
Breakdown Voltage	The voltage at which the insulation between conductors breaks down.		
Bunch Stranding	A group of wires of the same diameter twisted together without a predetermined pattern.		
Cabling	The twisting together of two or more insulated conductors to form a cable.		

Glossary of Terms

Continuity Check	A test to determine whether electrical current flows continuously throughout the length of a single wire or individual wires in a cable.	Energy Capacity	The heat absorption capacity to absorb electrically generated heat, expressed in joules, or watt-seconds.
Cord	A flexible insulated wire.	Filler	(1) A material used in multiconductor cables to occupy large interstices formed by the assembled conductors. (2) An inert substance added to a compound to improve properties or decrease cost.
Corona	Ionization of air surrounding a conductor caused by the influence of high voltage. Causes deterioration of insulation materials.	Flame Resistance	The ability of a material not to propagate flame once the heat source is removed.
Crazing	The minute cracks on the surface of plastic materials.	Flex Life	The measurement of the ability of a conductor or cable to withstand repeated bending.
CSA	Abbreviation for Canadian Standards Association, a non-profit, independent organization that operates a listing service for electrical and electronic materials and equipment. The Canadian counterpart of the Underwriters Laboratories.	Frequency	The number of times an alternating current repeats its cycle in one second. (See Hertz)
Current Carrying Capacity	The maximum current an insulated conductor can safely carry without exceeding its insulation and jacket temperature limitations.	Gauge	A term used to denote the physical size of a wire.
Dielectric Strength	The voltage that an insulation can withstand before breakdown occurs. Usually expressed as a voltage gradient (such as volts per mil).	Ground	An electrical term meaning to connect to the earth or other large conducting body to serve as an earth, thus making a complete electrical circuit.
Direct Capacitance	The capacitance measured directly from conductor to conductor through a single insulating layer.	HPN	Parallel heater cord, typically neoprene-type insulation.
Direct Current	An electric current that flows in only one direction.	Harness	An arrangement of wires and cables, usually with many breakouts, which have been tied together or pulled into a rubber or plastic sheath, used to interconnect an electrical circuit.
Drain Wire	In a cable, the uninsulated wire laid over the component or components and used as a ground connection.	Hertz (Hz)	A term replacing cycles per second as an indication of frequency.
Drawing	In wire manufacture, pulling metal through a die or series of dies to reduce diameter to a specified size.	High Potential	A test designed to check the integrity of a conductor's insulation by applying a specified high voltage.
Electromagnetic	Unwanted signals picked up and transmitted over electrical lines, caused by varying magnetic fields.	Hybrid Circuit	A surge suppressor that uses a combination of two or more types of electronic devices to provide additional or multi-stage surge protection (most surge protection use only MOVs).
Eccentricity	Like concentricity, a measure of the center of a conductor's location with respect to the circular cross-section of the insulation. Expressed as a percentage of displacement of one circle within the other.	Hz	Abbreviation for hertz.
Elongation	The fractional increase in length of a material stressed in tension.	Impedance	The total opposition that a circuit offers to the flow of alternating current or any other varying current at a particular frequency. It is a combination of resistance R and reactance X, measured in ohms.

Glossary of Terms

Inductance	The property of a circuit or circuit element that opposes a change in current flow, thus causing current changes to lag behind voltage changes. It is measured in henrys.	Primary Insulation	The first layer of non-conductive material applied over a conductor, whose prime function is to act as electrical insulation.
Insulation	A material having high resistance to the flow of electric current. Often called a dielectric in radio frequency cable.	Put-Up	Packaging of finished wire or cable.
Jacket	An outer non-metallic protective covering applied over an insulated wire or cable.	Rated Voltage	The maximum voltage at which an electrical component can operate for extended periods without undue degradation or safety hazard.
Jumper Cable	A short flat cable inter-connecting two wiring boards or devices.	Resistance	A measure of the difficulty in moving electrical current through a medium when voltage is applied, measured in ohms.
Lay	The length measured along the axis of a wire or cable required for a single strand (in stranded wire) or conductor (in cable) to make one complete turn about the axis of the conductor or cable.	S	Heavy-duty, rubber-insulated portable cord. Stranded copper conductors with separator and individual rubber insulation. Two or more color-coded conductors cabled with filler, wrapped with separator and rubber jacketed overall. 600 V.
Longitudinal Shield	A tape shield, flat or corrugated, applied longitudinally with the axis of the core being shielded.	SEOW	Thermoplastic elastomer (TPE) insulated conductors. Water flame, oil, abrasion, ultraviolet resistant for outdoor use.
L-N	An abbreviation for line-to-neutral, the location for the most common type of power surge (see Full Protection).	SJ	Junior hard service, rubber-insulated pendant or portable cord. Same construction as type S, but 300 V. Jacket thickness smaller.
MTW	Thermoplastic insulated machine tool wire.	SJEOW	Same as SJ, with Thermoplastic elastomer (TPE) jacket and insulated conductors. Water, flame, oil, abrasion, ultraviolet resistant for outdoor use.
Multiconductor	More than one conductor within a single cable complex.	SJEOOW	Same as SJEOW, but with oil resistant inner and outer jacketing.
Mylar	A synthetic compound with high dielectric qualities made by Du-pont® and used extensively in the wire and cable industry.	SJO	Same as SJ, but neoprene, oil-resistant compound outer jacket. Can also be made "water resistant". 300 V, 60°C, 75°C, or 90°C.
Noise	A term for unwanted electrical signals on the power line.	SJOOW	All rubber, oil, water, flame, abrasion resistant in/out jacket. 300 V, -40°C to 90°C.
Noise Filter	An electronic component, usually a capacitor, designed to minimize unwanted electrical signals.	SJT	Junior hard service thermoplastic insulated conductors with overall thermoplastic jacket, 300 V, 60°C, 75°C, or 90°C. Indoor use.
Ohm	A unit of electrical resistance.	SJTO	Same as SJT, but oil-resistant thermoplastic outer jacket.
Peak Current	Another term for energy capacity.	SJTW	Same as SJT, but outdoor water-resistant outer jacket.
Picosecond	One trillionth of a second.		
Plasticizer	A chemical agent added to plastics to make them softer and more pliable.		
Potting	The sealing of a cable termination or other component with a liquid that thermosets into an elastomer.		

Glossary of Terms

SO	Hard service cord. Same construction as type S, except thicker oil-resistant neoprene jacket. 600 V, 60°C to 90°C.	Shield	A sheet, screen, or braid of metal, usually copper, aluminum, or other conducting material, placed around or between electric circuits or cables or their components to contain any unwanted radiation, or to keep out any unwanted interference.
SOOW	All rubber, oil, water, flame, abrasion resistant indoor/outdoor jacket. 600 V, -40°C to 90°C.	Spacing	Distance between the closest edges of two adjacent conductors.
SP-1	All rubber, parallel-jacketed, two-conductor light-duty cord for pendant or portable use. 300 V.	Spark Test	A test designed to locate pin-holes in the insulation of a wire or cable by application of high voltage for a very short period of time while the wire is being drawn through the electrode field.
SP-2	Same as SP-1, but heavier construction, with or without a third conductor for grounding purposes. 300 V.	Spiral Wrap	The helical wrap of a tape over a core.
SP-3	Same as SP-2, but heavier construction for refrigerators or room air conditioners. 300 V.	Strand	A single uninsulated wire.
SPT-1	Same as SP-1, except all-thermoplastic. 300 V. With or without third conductor for grounding.	Stranded Conductor	A conductor composed of groups of wires twisted together.
SPT-2	Same as SP-2, except all-thermoplastic. 300 V. With or without third conductor for grounding.	Tensile Strength	The pull stress required to break a given specimen.
SPT-3	Same as SP-3, except all-thermoplastic. 300 V. With or without third conductor for grounding.	Thermoplastic	A material that softens when heated and becomes firm on cooling. Example: PVC (plastic).
ST	Hard service cord, jacketed. Same as type S, except all-plastic construction. 600 V, 60°C to 105°C.	Thermoset	A material that hardens or sets when heat is applied and that, once set, cannot be resoftened by heating. The application of heat is called "curing." Example: rubber.
STO	Same as ST, but with oil-resistant thermoplastic outer jacket. 600 V, 60°C to 105°C.	UL	Abbreviation for Underwriters Laboratories, a non-profit independent organization that operates a listing service for electrical and electronic materials and equipment.
STW	Same as ST, but indoor/outdoor water-resistant outer jacket.	UL 497A	The UL standard covering the basis for UL listing of surge controls for phone lines.
SVT	All plastic construction. Light-duty vacuum cleaner cord. With or without third conductor for ground purposes only. 300 V, 60°C to 105°C.	UL 452	The UL standard covering the basis for UL listing of CATV lines.
Separator	Pertaining to wire and cable, a layer of insulating material such as textile, paper, mylar, etc., which is placed between a conductor and its dielectric, between a cable jacket and the components it covers, or between various components of a multiple-conductor cable. It can be utilized to improve stripped qualities, roundness, and/or flexibility, or can offer additional mechanical or electrical protection to the components it separates.	Voltage	The term most often used in place of electromotive force, potential, potential difference, or voltage drop to designate the electrical pressure that exists between two points and is capable of producing a current when a closed circuit is connected between two points.
		VW-1	A flammability rating established by Underwriters Laboratories for wires and cables that pass a specially designed vertical flame test, formerly designated FR-1. Typically used for individual conductors or parallel-type constructions.

Index of Parts

Item No.	Page No.	Pack Qty.	Master Carton Weight	UPC# 8-03058-
01-00039	15	24	11	00539-9
01-00040	15	24	17.55	00540-5
01-00041	15	18	18.15	00541-2
01-00042	15	12	15.55	00542-9
01-00043	15	12	18.9	00543-6
01-00045	15	12	17.5	00545-0
02-00034	26	24	20.25	00034-9
03-00030	15	25	15	00530-6
03-00031	15	25	22.45	00531-3
03-00032	15	25	12.05	00532-0
03-00033	15	25	17.3	00533-7
03-00045	15	25	12.55	00045-5
03-00047	15	25	16	00047-9
03-00048	15	20	16.2	00048-6
03-00049	15	25	7.3	00049-3
03-00050	15	25	11.95	00050-9
03-00051	15	25	15.55	00051-6
03-00052	15	25	7.1	00052-3
03-00054	15	25	11.65	00054-7
03-00055	15	25	15.6	00055-4
03-00060	15	25	22	00060-8
03-00062	15	25	19.85	00062-2
03-00063	15	6	24.95	00063-9
03-00064	15	25	25	00064-6
03-00066	15	24	38	00066-0
03-00067	16	12	13.35	00067-7
03-00069	16	12	17.75	00069-1
03-00070	16	12	17.95	00070-7
03-00072	16	12	24.95	00072-1
03-00073	16	12	20.2	00073-8
03-00075	16	12	26.9	00075-2
03-00076	16	12	19.25	00076-9
03-00078	16	12	26.46	00078-3
03-00079	16	12	21.6	00079-0
03-00081	16	12	33.05	00081-3
03-00082	16	12	27.35	00082-0
03-00084	16	12	43.42	00084-4
04-00087	13	25	3.9	00087-5
04-00088	12	6	4.25	00088-2
04-00090	12	6	5.8	00090-5
04-00091	12	6	6.55	00091-2
04-00092	6/13	10	6.65	00092-9
04-0092N	13	10	6.85	00492-7
04-00093	6/13	10	6.1	00093-6
04-0093N	13	10	5.75	00493-4
04-00094	12	12	13.9	00094-3
04-00095	12	12	18.2	00095-0
04-00096	12	12	18.95	00096-7
04-00097	12	12	24.25	00097-4
04-00098	13	6		00098-1
04-00101	14	6	5.9	00101-8
04-00102	14	6	9.75	00102-5

Item No.	Page No.	Pack Qty.	Master Carton Weight	UPC# 8-03058-
04-00103	14	6	8.3	00103-2
04-00104	14	6	10.4	00104-9
04-00105	14	6	8.3	01105-5
04-00107	14	4	12.75	01107-6
04-00108	14	4	12.8	01108-3
04-00214	13	4	13.9	01214-4
04-00215	13	4	14	01215-1
04-00216	13	4	13.8	01216-8
04-00217	13	4	13.3	01217-5
04-00491	6, 12	6	4.5	00491-0
05-00105	6	12	42.25	00105-6
05-00106	6	4	27.3	00106-3
05-00107	6	2	26.65	00107-0
05-00108	7	12	24.2	00108-7
05-00109	7	12	46.3	00109-4
05-00110	7	6	45.55	00110-0
05-00111	6	12	30.95	00111-7
05-00112	6	6	29.4	00112-4
05-00113	6	3	28.3	00113-1
05-00114	9	4	29.85	00114-8
05-00115	9	4	29.8	00115-5
05-00116	9	2	29.1	00116-2
05-00117	9	2	27.8	00117-9
05-00118	6	1	12.05	00118-6
05-00119	6	1	23.75	00119-3
05-00120	7	12	34.2	00120-9
05-00121	7	6	32.85	00121-6
05-00122	7	4	41.15	00122-3
05-00123	7	8	32.7	00123-0
05-00124	7	4	30.85	00124-7
05-00125	7	2	29.45	00125-4
05-00128	8	4	29.4	00128-5
05-00131	8	2	28.55	00131-5
05-00152	9	4	29.7	00152-0
05-00153	9	2	28.75	00153-7
05-00157-US	9	12	43.6	01157-4
05-00158-US	9	4	28.8	01158-1
05-00159-US	9	2	28.1	01159-8
05-00341	7	12	31.65	00370-8
05-00342	7	6	30.6	00371-5
05-00343	7	3	28.25	00373-9
05-00347	9	12	44.3	00447-7
05-00348	9	4	30.35	00348-7
05-00349	9	2	28.75	00349-4
05-00350	7	1	13.8	00350-0
05-00351	7	1	25.6	00351-7
05-00352	8	2		01352-3
05-00353	8	1		01353-0
05-00364	7	12	44	00364-7
05-00365	7	4	28.5	00365-4
05-00366	7	2	28.55	00666-2
05-00514	8	4		01514-5

Index of Parts

Item No.	Page No.	Pack Qty.	MasterCarton Weight	UPC# 8-03058-
05-00515	8	2		01515-2
05-00555	9	4		01555-8
05-00556	9	2		01556-5
06-00162	8	4	41.45	00162-9
06-00163	8	2	39.89	00163-6
06-00167	8	2	24.55	00167-4
06-00168	8	2	47.75	00168-1
06-00180	8	1	13.45	00680-8
06-00181	8	1	28.1	00681-5
07-00260	26	2	26.6	01260-1
07-00283	26	2	33.3	00283-1
07-00284	26	2	34.92	00284-8
08-00024	30	1/50	0.2	00824-6
08-00184	26	4	20.94	00184-1
08-00185	26	6	25.4	00185-8
08-00188	20	1	11.7	00188-9
08-00189	20	1	10.2	00189-6
08-00190	20	1	17.42	00190-2
08-00192	20	1	18.8	00192-4
08-00194	20	1	25.35	00194-0
08-00197	20	1	10.95	00197-1
08-00198	20	1	25.36	00198-8
08-00203	30	20	2.3	00203-9
08-00204	30	20	8.05	00204-6
08-00209	25	4	12.9	00209-1
08-00211	25	2	22.8	00211-4
08-00219	25	6	23.1	00219-0
08-00404	18	2	15.45	01404-9
08-00405	19	2	17.1	01405-6
08-00408	19	2	20.8	00408-8
08-00410	18	2	12.85	00410-1
08-00417	19	2	17.86	00417-0
08-00418	19	2	16.25	00418-7
08-00420	19	2		00420-0
08-00460	19	2		02460-4
08-00461	19	2		02461-1
08-00462	19	2		02462-8
08-00502	30	10	0.5	01502-2
08-00503	30	10	3.8	01503-9
08-00504	20	4	8.65	01504-6
08-00505	20	2	17.15	01505-3
08-00507	20	4		01507-7
08-00508	20	2		01508-4
08-00510	20	1	15.15	01510-7
08-00598	23	2	4.4	01598-5
08-00599	23	2		00599-3
08-00601	23	2	4.75	01601-2
08-00602	21	6	5.95	01602-9
08-00605	22	6	4.3	01605-0
08-00606	22	6	4.4	01606-7
08-00607	21	6	4.55	01607-4
08-00608	21	6	6.9	01608-1

Item No.	Page No.	Pack Qty.	MasterCarton Weight	UPC# 8-03058-
08-00609	25	6	24.45	00609-9
08-00611	25	2	26.35	00611-2
08-00612	21	6		00612-9
08-00617HD	21	6	2.15	00617-4
08-00692	22	6	2.55	00692-1
08-00693	22	6/30	3.7	00693-7
08-00731	23	2	6.55	00731-7
08-00732	23	2	8.6	00732-4
08-00733	24	2	23.45	00733-1
08-00734	24	2	28.3	00734-8
08-00735	24	2	38.9	00735-5
08-01187	20	1	7.95	01187-1
08-01188	20	1	13.65	01188-8
09-00214	18	1	33.65	00214-5
09-00215	18	1	65.4	00215-2
09-00375	17	1	27.25	00375-3
09-0T376	17	1	27.15	00376-0
09-00431	18	1	30.3	00431-6
09-00432	18	1	56.9	00432-3
09-00435	18	1	5.9	00435-4
09-00437	18	2	15.65	00437-8
09-00675	17	1	35.9	00675-4
09-0T676	17	1	35.8	00676-1
11-00223	27	12	16.76	00223-7
11-00225	27	12	12	02225-9
11-00226	27	6	12.5	02226-6
11-00227	27	6	14.8	02227-3
12-00223	28	10	1.5	
12-00224	28	10	1	
12-00225	28	10	1.5	
12-00226	28	10	1.7	
12-00227	28	10	1.7	
12-00228	28	10	1.7	
12-00229	28	10	3.5	
12-00230	28	10	4	
12-00231	28	10	3.3	
12-00232	28	10	4.2	
12-00233	28	10	3.5	
12-00234	28	10	4	
12-00235	28	10	3.4	
12-00236	28	10	4	
12-00237	28	10	3.6	
12-00238	28	10	3.7	
12-00239	28	10	3.6	
12-00240	28	10	4.5	
12-00242	28	10	8	
12-00243	28	10	7.9	
12-00244	28	10	1	
12-00245	28	10	1.1	
12-00344L	28	10	5	
12-00345L	28	10	5	

Office and Satellite Warehouse Locations:

<p style="text-align: center;">Brea Office 3230 E Imperial Hwy, #218 Brea, CA 92821 Office: 909-606-1991 Fax: 909-606-0281 Toll Free: 866-4VOLTEC (486-5832)</p>	<p style="text-align: center;">US Wire / Flexon 33 Queen Street Newark, NJ 07114 Office: 973-824-5530/1-800-327-4673 Fax: 973-824-1208</p>	<p style="text-align: center;">CANOW Western 4451 Eucalyptus Ave. #330 Chino, CA 91710 Office: 909-606-9111 Fax: 909-606-4660</p>
<p style="text-align: center;">Vanguard Sales 2192 W. Winton Ave Hayward, CA 94545 Office: 800-260-9430 Fax: 510-785-6483</p>	<p style="text-align: center;">Distributors' Source of Florida, Inc. 2590 Ocoee Apopka Road Apopka, FL 32703 Office: 407-831-6676 Fax: 407-831-0086</p>	<p style="text-align: center;">Construction Product Sales 1814 Beach St Broadview, IL 60155 Office: 800-837-2771 Fax: 800-837-1329</p>
<p style="text-align: center;">Main Source Corporation 9014 Junction Drive Annapolis Junction, MD 20701 Office: 800-342-4750 Fax: 410-792-0953</p>	<p style="text-align: center;">Morris Marketing Group 2720 E Phillips Rd Greer, SC 29650 Office: 800-468-7122 Fax: 864-281-0648</p>	<p style="text-align: center;">FGR Group 2511 W Mount Houston Road Houston, TX 77038 Office: 281-529-6698</p>
		<p style="text-align: center;">Construction Agents Northwest 177 South Orcas Seattle, WA 98108 Office: 206-762-5450 Fax: 206-767-6804</p>

Warranty



Limited Lifetime Warranty:

For the lifetime of this product, if it fails due to a manufacturing defect, return it to Voltec for a free replacement. This warranty is limited to the replacement of the product only and no other warranty, liability or responsibility is implied or expressed.



Limited Warranty:

If the product fails during the 1 year warranty period due to a manufacturing defect, return it to Voltec for a free replacement. This warranty is limited to the replacement of the product only and no other warranty, liability or responsibility is implied or expressed.

Returns and Shipping Policy

Return Goods Authorization (RGA):

If the product fails during the warranty period, due to a manufacturing defect, return it to Voltec for a free replacement. This warranty is limited to the replacement of the product only and no other warranty, liability or responsibility is implied or expressed. Before returning any item to Voltec, an RGA number must be obtained directly from Voltec. Any item returned to Voltec without an RGA number will not be inspected and will be sent back to the original sender. Once an RGA is received, the item will be inspected, and if the item is deemed to be a manufacturing defect, a replacement will be sent to the customer on behalf of Voltec. If an RGA is received and deemed to be customer abuse, and not a manufacturing defect, this item will be sent back the customer at the customer's expense.

Shipping Policy:

Voltec's prepaid freight policy applies only to continental US addresses. All prepaid orders will be sent out at Voltec's discretion either using UPS ground or any major trucking line's. Purchase orders that do not reach Voltec's prepaid minimum will be charged to the customers account. For any freight prepay and add orders, Voltec will only be responsible for shipping UPS ground. If the customer requires an expedited service, or something other than UPS Ground, then the customer will have to provide their courier account number.



Monday-Friday, 7AM to 5PM PST

1-866-4VOLTEC (866-486-5832)

Email: customerservice@voltec-industries.com

For Complete Resource Visit Our Website

www.voltecpowerlighting.com

Corporate Office
3230 E. Imperial Hwy, Ste # 218
Brea CA 92821
909.606.1991 tel
909.606.0281 fax

**Regional Distribution
Warehouses**

Chino, California
Hayward, California
Orlando, Florida
Chicago, Illinois
Annapolis Junction, MD
Newark, New Jersey
Greer, South Carolina
Houston, Texas
Seattle, Washington



April 2022

