



SHIPS IN 7-10 BUSINESS DAYS – FACTORY BUILT TO ORDER



4 Door Styles - 17 Colors

2026 SPECIFICATION GUIDE

The WeatherStrong® Difference	3-4
Door Styles and Finishes	5-6
Important - Grill and Side Burner Bases	7
Base Cabinets	11-27
Grill Base Cabinets	11-13
Side Burner Base Cabinets	14
Full-Height Base Cabinets	15-18
Blind Base Cabinets.....	19
Standard Base Cabinets	20-23
Drawer Base Cabinets	24-26
Sink Base Cabinets	27
Wall Cabinets	28-33
Wall Bridge Cabinets	29
Standard Wall Cabinets	30-32
Blind Wall Cabinets	33
Utility Cabinets	34-35
Matching End Panels	36-37
Parts and Accessories	38-40
Outdoor Stools	41
Decorative Hardware	42
Parts Directory	43-49
Leveling Leg Installation	50-53
Platic Legs	50
Toe Kick Application	51
Stainless Steel	52
Toe Kick Application	53
Installation Guide	54-59
Care and Use Guide	60-62
Warranty	63
Notes	64



THE CORE OF OUR STRENGTH

Every WeatherStrong® cabinet is crafted from our exclusive weather resistant system—engineered to handle sun, salt, storms, and heavy use without losing its strength or style. From the rugged cabinet core to the beautiful, low-maintenance doors, every detail is made to thrive outdoors and keep looking flawless year after year.



1. HDPE Doors & Drawers

Made from marine-grade High-Density Polyethylene, our doors and drawer fronts resist warping, fading, and cracking—even in harsh coastal or high-heat environments.

2. All-Weatherboard® Cabinet Box

Our cabinet frames are constructed with ¾" thick All-Weatherboard® composite for unmatched durability, moisture resistance, and structural integrity.

3. Full-Height Back Panels

We don't do partial coverage. Every cabinet includes a ¾" thick All-Weatherboard® back panel that runs top to bottom for extra strength and stability.

4. Vented End Panels

Integrated oval cut-outs promote safe airflow and help prevent gas buildup—plus, optional inset mesh vent grills keep pests out.

5. Adjustable Support Legs

Factory-installed 'Sure Level' polymer legs support up to 330 lbs. For a sleeker look, upgrade to decorative stainless steel legs—perfect for uneven surfaces and high-end installs.

6. Stainless Steel Soft-Close Hinges

Stainless steel, 6-way adjustable hinges ensure perfect door alignment and provide quiet, soft closing operation.

7. Stainless & Aluminum Handles

Choose from a curated selection of outdoor-rated handles in polished or brushed finishes—each one built to resist rust and elevate your design.

8. All-Weatherboard® Adjustable Shelves

Just like the cabinet box, our ¾" thick composite shelves deliver strength, water resistance, and a flawless fit that lasts.

9. Heavy-Duty Drawer Boxes

Made entirely from All-Weatherboard®, with full-extension stainless steel soft-close runners for smooth, quiet, everyday performance.



STURDY CONFIRMAT SCREW ASSEMBLY

To help ensure the assembly of strong cabinets, WeatherStrong® counterbores the cabinetry panels and uses stainless steel confirmat screws.



OUTDOOR STRENGTH. INDOOR STYLE

Outdoor living is where memories are made—sun-soaked cookouts, evening cocktails by the pool, family gatherings that spill onto the patio. WeatherStrong® was born on the Florida coast to make those moments effortless.

We've combined the rugged durability of outdoor-tested materials with the elevated finishes of indoor design. The result? Cabinets that look stunning and stay that way—through blazing summers, salty air, heavy rain, and even snow.

With WeatherStrong®, you're not just building an outdoor kitchen. You're creating a space that's as stylish as it is strong—crafted to handle whatever life (and the weather) throws your way.



WEATHERPROOF DURABILITY

When you choose WeatherStrong®, you're choosing cabinetry built from the ground up to conquer the outdoors. Our exclusive WeatherStrong Cabinet System is engineered to thrive in salt, sun, and storms—keeping its strength and style year after year—and every cabinet is backed by our Limited Lifetime Warranty.

- **WeatherStrong® Cabinet System** – our proven, weather resistant build never swells, fades, or cracks, no matter the climate
- **Rust-proof confidence** – marine-grade hardware keeps every hinge and handle looking like new, even in coastal air
- **Easy-care performance** – wipes clean in seconds, so your space stays as fresh as the day it was built



STYLE WITHOUT COMPROMISE

Only WeatherStrong® delivers finishes that combine rich texture, bold color, and lasting beauty—all engineered to thrive outdoors. Inspired by indoor design but built for the elements, every finish is part of our exclusive WeatherStrong Cabinet System, ensuring style and strength go hand in hand.

- **Premium WeatherStrong® finishes** – indoor-inspired elegance, perfected for outdoor living
- **Texture & depth** – more character than flat metal or stainless cabinetry
- **Fade- and chip-resistant** – keeps its look, season after season



BUILT FOR REAL LIFE

It's not a kit—it's a kitchen. Semi-custom cabinetry that flexes to fit your space—made just for you in 10 days.

- **Semi-custom flexibility** to fit any layout, large or small
- **Tailored designs** that work with your unique vision and space
- **Faster turnaround**—crafted to order and shipped in just 10 days



LOW-MAINTENANCE LIVING

No sealing, staining, stress or metal headaches. Just durable materials made to stay clean.


- **No sealing or refinishing**—ever
- **Stain- and grime-resistant** surfaces stay clean with minimal effort
- **Spend more time living**, not maintaining your outdoor kitchen



BUILT FAST. BUILT STRONG.

Ships in just 10 business days—so your outdoor space gets done fast, and done right.

- **Industry-best lead times**—no waiting weeks to start your project
- **Made to order** and shipped quickly without sacrificing quality
- **Reliable delivery** keeps your project on track from start to finish

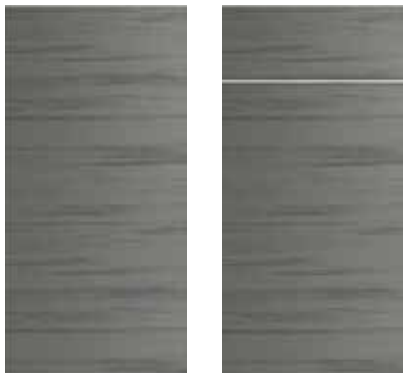


MIAMI

- 5/8" thick flat panel door in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 42 for details.
- Lifetime Limited Warranty



SANIBEL

- 5/8" thick flat panel door with an extended stile shaker-inspired routed center panel design in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 42 for details
- Lifetime Limited Warranty

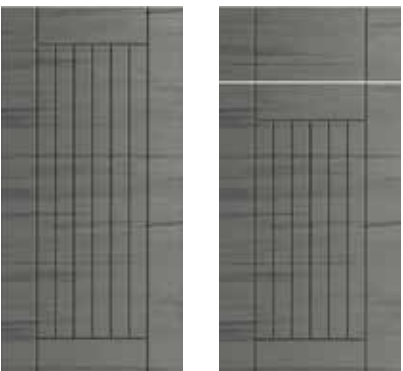

DAYTONA

- 5/8" thick flat panel door with an extended stile cottage-inspired routed center panel design in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 42 for details
- Lifetime Limited Warranty



TAMPA

- 5/8" thick flat panel door with an extended stile louver-inspired routed center panel design in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 42 for details
- Lifetime Limited Warranty

Images are computer generated and should not be used for true color representation or color matching. Please order a sample to view the actual color of the door in your space and light.

HDPE SOLID DOOR FINISHES - LIFETIME LIMITED WARRANTY



Shell White



Shoreline Gray



Lighthouse Gray



Wrought Iron



Pitch Black



Bluff Beige



Dock Brown



Emerald Green



Reef Blue



Sapphire Blue

HDPE WOODGRAIN DOOR FINISHES - LIFETIME LIMITED WARRANTY




Whitewash



Weatherwood



Dark Ash




Teak



Hickory



Mahogany



Ironwood


COORDINATING EDGE BANDING COLORS

Color Name	Edge Banding Color
Bluff Beige	White
Dark Ash	Gray
Dock Brown	Black
Emerald Green	Gray
Hickory	Black
Ironwood	Black
Lighthouse Gray	Gray
Mahogany	Black
Pitch Black	Black


Color Name	Edge Banding Color
Reef Blue	Gray
Sapphire Blue	Black
Shoreline Gray	Gray
Shell White	White
Teak	Gray
Weatherwood	Gray
Wrought Iron	Black
Whitewash	White

**INSULATING JACKET REQUIRED****Customer Responsibility:**

Grill, griddle, and side burner bases must be installed with the grill manufacturers specified insulation jacket to maintain warranty coverage.

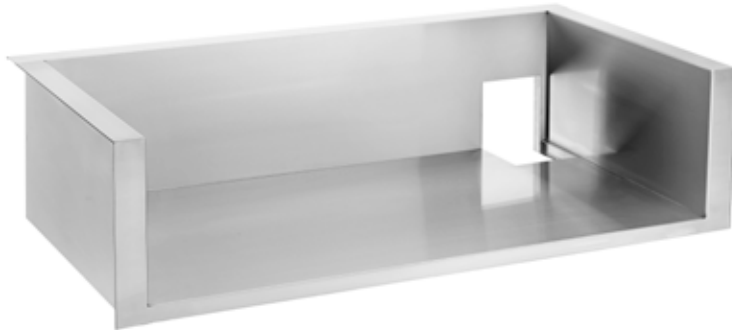

Grill Insulating Jacket

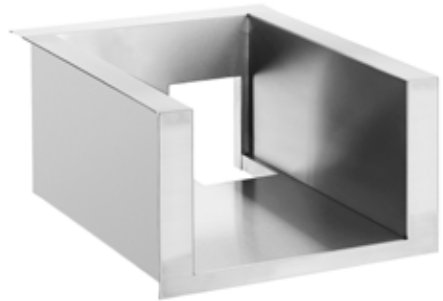

Side Burner Insulating Jacket

"ZONES" TO KEEP IN MIND

When designing your kitchen you want to make sure each of your appliances are easily accessible.

To help in doing this it's important to think in zones.

- **Hot Zone:** This is the heart of the kitchen, where you will have heat admitting appliances.
- **Dry Zone:** This is a food preparation area. You will want an area of counter space that is near the Hot Zone.
- **Wet Zone:** Area with your sink that can be near your Dry zone. This zone should not infringe on your prep station
- **Cold Zone:** This will be your refrigerator or cold storage appliances. This zone should be kept away from the Hot Zone.

**HOW MUCH BUFFER SPACE WILL I NEED?**

In addition to the three feet of prep space, you'll need to consider the amount of "landing space" for each appliance in your outdoor kitchen to ensure it's a safe distance from walkways and from other appliances. Our recommendations are:

- **Grill or Pizza Oven:** 24" of counter space on one side and 12" on the other
- **Sink:** 18" on each side
- **Refrigerator:** 15" of counter space above or around the fridge
- **Side Burner/Cooktop:** 12" on each side


Of course, these "buffer zones" can contribute to the 36" of uninterrupted prep space mentioned earlier. Just be sure to consider the practical side of getting everything to fit, such as whether you want under-the-counter appliances such as a mini refrigerator to be right at your legs where you'll be doing the bulk of your prep work.



JUPITER 32" CLASSIC 4-BURNER BUILT-IN GAS GRILL WITH INSULATING JACKET

Features

- #443 Stainless Steel Construction
- Includes Insulated Jacket
- Grill Size: 32"
- Cooking Area: 533 sq. in.
- Total BTUs: 48,000
- Number of Burners: 4 Tube Burners
- Ignition: Piezo Flame Thrower
- Thermometer: Built-in Analog
- Fuel Type: Liquid Propane (Natural Gas Conversion Kit Included)

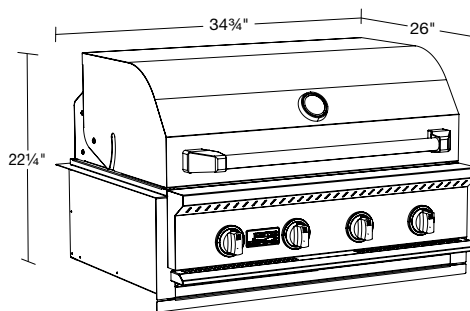

Item Number
JUPG324-LP-CLS

Cutout Dimensions

Width

33"

Depth

22½"


Height

9⅝"

JUPITER 32" PRO 4-BURNER BUILT-IN GAS GRILL WITH INSULATING JACKET

Features

- #443 Stainless Steel Construction
- Includes Insulated Jacket
- Grill Size: 32"
- Cooking Area: 533 sq. in.
- Total BTUs: 60,000
- Number of Burners: 3 Cast, 1 Sear
- Ignition: Piezo Flame Thrower
- Thermometer: Built-in Analog
- Fuel Type: Liquid Propane (Natural Gas Conversion Kit Included)

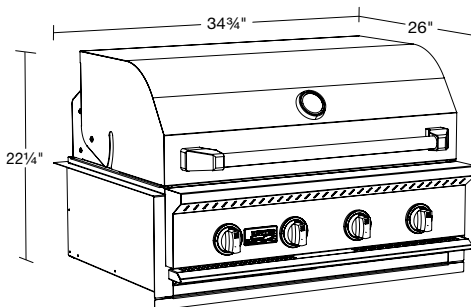

Item Number
JUPG324-LP-PRO

Cutout Dimensions

Width

33"

Depth

22½"

Height

9⅝"


PLEASE NOTE

JUPG324-LP-PRO ships as a bundled item that includes the JUPG324-LP-CLS and JUPGU32-LP for on-site conversion

JUPITER 14" WIDE STAINLESS STEEL GRIDDLE PLATE

Features

- #304 Stainless Steel Construction
- Built-In Grease Trap
- Perfect for smash burgers, veggies, and breakfast favorites
- Fits all Jupiter Branded grills and side burners

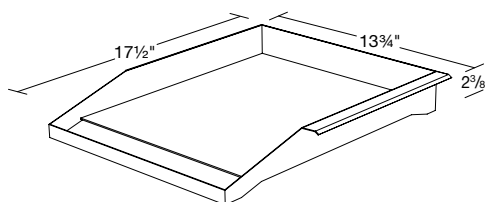


Item Number
JUPGP14

JUPITER DOUBLE SIDE BURNER WITH INSULATING JACKET

Features

- #443 Stainless Steel Construction
- Includes Insulated Jacket
- Includes Stainless Steel Lid
- Cooking Area: 196 sq. in.
- Total BTUs: 24,000
- Number of Burners: 2 Round Brass
- Ignition: Piezo Flame Thrower
- Fuel Type: Liquid Propane
(Natural Gas Conversion Kit Included)

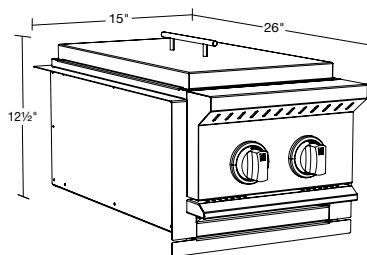

Item Number
JUPDSB-LP

Cutout Dimensions

Width

13 1/4"

Depth

22 1/2"


Height

9 5/8"

JUPITER PRO UPGRADE KIT

Features

- Seamlessly integrates with Jupiter 32" Classic Grill for an easy upgrade or purchase the Jupiter 32" PRO version which includes the upgrade kit
- Kit Includes: (1) Infrared Searing Burner, (3) Cast Stainless Burners, (3) Ceramic Briquette Trays, and Heat Zone Separators
- Boosts heat, control, and consistency for elevated cooking performance

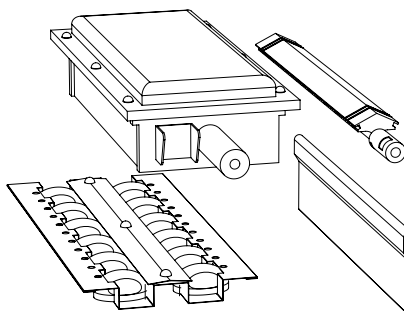


Item Number
JUPGU32-LP

JUPITER 22" 4.1 CU. FT. OUTDOOR APPROVED REFRIGERATOR

Features

- #304 Stainless Steel Door
- Black Coated Steel Exterior
- White Polymer Interior
- Net Capacity: 4.1 cu. ft.
- Bottle Capacity: 156
- Interior Shelving: 4 Glass Shelves
- Temperature Range: 32-72°F
- Door Hinge: Field Reversible

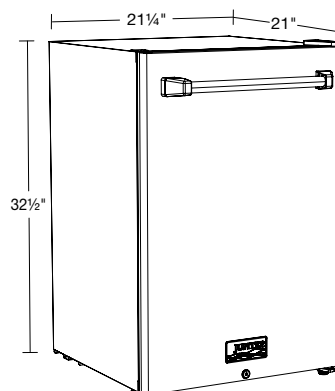


Item Number
JUPR130

JUPITER 32" GRILL COVER

Features

- Heavy-duty PVC with UV resistance
- Polyester-lined interior
- Custom-fitted with velcro strap

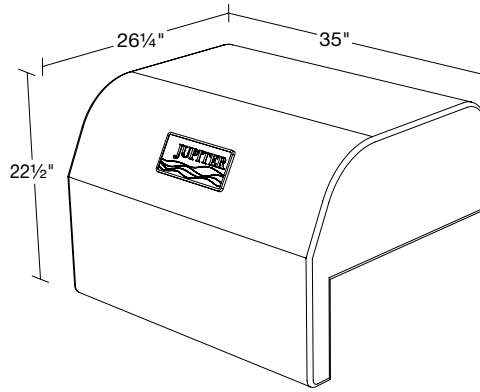


Item Number
JUP32GC

JUPITER SIDE BURNER COVER

Features

- Heavy-duty PVC with UV resistance
- Polyester-lined interior
- Custom-fitted with velcro strap



Item Number
JUPDSBC

BASE CABINET CONTRUCTION

Base cabinet construction features a 30" high cabinet box, which must be mounted on 4½" high Sure Level adjustable polymer legs. Legs are installed on-site and are adjustable from 3¾" to 5¼" high. Optional stainless steel adjustable legs are available as an accessory. Optional snap-on matching toe kick panels are available 6" high x 96" long, for on-site modification and installation.

Our base cabinets feature a full-height ¾" thick enclosed All-Weatherboard® composite material back panel. Base cabinets can be installed as a freestanding island, or as a peninsula extending from a wall.



GRILL BASE CABINETS

Features

- The face plate is modified in field to accept the respective insulating jacket used with the gas grill
- ¾" All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 42 for details
- Grill base cabinet sides feature two vent cutouts, designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak

GRILL BASE CABINET CODING

GB 36 30 IB			
GB Cabinet Code	36 Width	30 Depth	IB Full-Back

PLEASE NOTE

All built-in grill heads require an insulating jacket. Please consult your grill manufacturer for the appropriate model.

GRILL BASE CABINET TIP

Grill base cabinets are manufactured with two full upper face plates that will need to be field modified to accept the insulating jacket used with the gas grill.

Under no circumstance should a grill be installed without the appropriate insulating jacket specified by the appliance manufacturer or warranty is voided.




DOUBLE DOOR GRILL BASE CABINET

Max Apron Width Cutout

GB36IB - 31.5
GB42IB - 37.5
GB48IB - 43.5

Max Apron Height Cutout plus Countertop Thickness

GB36IB - 11.5
GB42IB - 11.5
GB48IB - 11.5

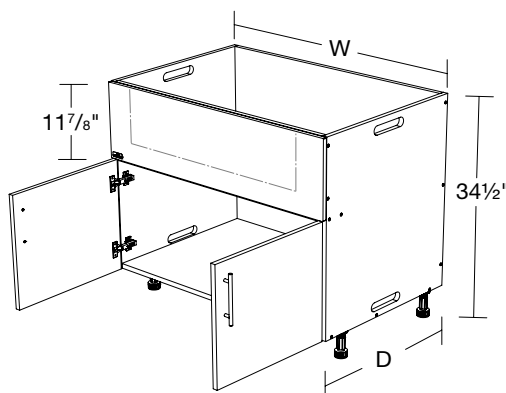

Item Number	Width	Depth	Height
GB36IB	36	27	34.5
GB3630IB	36	30	34.5
GB42IB	42	27	34.5
GB4230IB	42	30	34.5
GB48IB	48	27	34.5
GB4830IB	48	30	34.5


FOUR DOOR GRILL BASE CABINET

Max Apron Width Cutout

GB60IB - 55.5

Max Apron Height Cutout plus
Countertop Thickness

GB60IB - 11.5

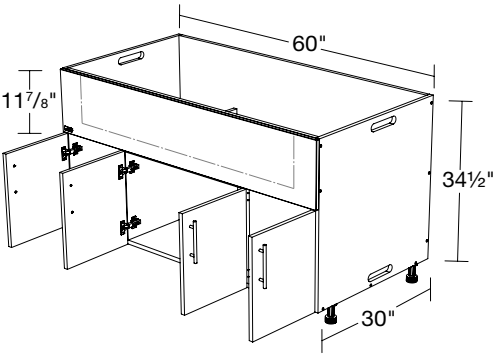

Item Number	Width	Depth	Height
GB60IB	60	30	34.5

EXTENDED APRON GRILL BASE CABINET TIP

The extended apron grill base is engineered for grills with insulating jackets that require a taller apron cut. Hybrid and Pellet grills are just a couple examples. The apron space on this grill is 18" in height and will need to be cut on the job site. Please consult your grill manufacture install instructions for the correct height required. Two drawers at the bottom allow for storage of grill pellets or other grilling accessories.




EXTENDED APRON GRILL BASE CABINET WITH 2 DRAWERS

Max Apron Width Cutout

GBP48IB - 43.5

Max Apron Height Cutout plus
Countertop Thickness

GBP48IB - 17.5

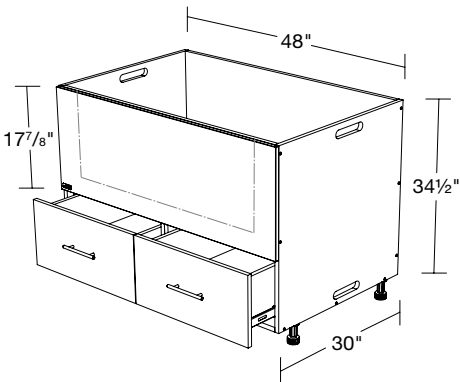


Item Number	Width	Depth	Height
GBP48IB	48	30	34.5

KAMADO GRILL BASE CABINET TIP

Kamado grill base cabinet requires the use of an outdoor counter surface on top of the base. This is where the grill will sit. Please consult the grill manufacture for surrounding clearance and installation of the grill.



KAMADO GRILL BASE CABINET

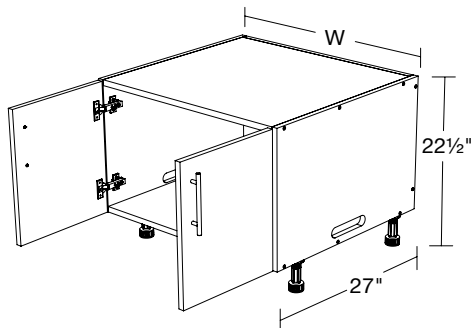

Item Number	Width	Depth	Height
B302718FHIB	30	27	22.5
B362718FHIB	36	27	22.5

SIDE BURNER BASE CABINETS

Features

- The face plate is modified in field to accept the respective insulating jacket used with the side burner
- 3/4" All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 42 for details
- Side burner cabinet sides feature two vent cutouts, designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak

SIDE BURNER BASE CABINET CODING

SBB 18 27 L IB				
SBB Cabinet Code	18 Width	27 Depth	L Left Hinge	IB Full-Back

PLEASE NOTE

All built-in side burners require an insulated jacket. Please consult your side burner manufacturer for the appropriate model.

SIDE BURNER BASE CABINET TIP

Side burner base cabinets are manufactured with two full upper face plates that will need to be field modified to accept the respective insulating jacket used with the side burner. Under no circumstance should a side burner be installed without the appropriate insulating jacket specified by the manufacturer of the appliance.




SINGLE DOOR SIDE BURNER BASE CABINET

Max Apron Width Cutout

SBB15 - 10.5
SBB18 - 13.5
SBB21 - 16.5

Max Apron Height Cutout plus
Countertop Thickness

SBB15 - 11.5
SBB18 - 11.5
SBB21 - 11.5

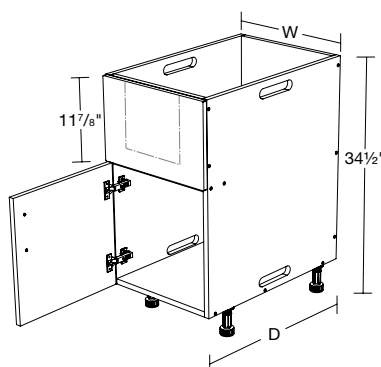

Item Number	Width	Depth	Height
SBB15LIB	15	27	34.5
SBB15RIB	15	27	34.5
SBB1530LIB	15	30	34.5
SBB1530RIB	15	30	34.5
SBB18LIB	18	27	34.5
SBB18RIB	18	27	34.5
SBB1830LIB	18	30	34.5
SBB1830RIB	18	30	34.5
SBB21LIB	21	27	34.5
SBB21RIB	21	27	34.5
SBB2130LIB	21	30	34.5
SBB2130RIB	21	30	34.5


DOUBLE DOOR SIDE BURNER BASE CABINET

Max Apron Width Cutout

SBB24 - 19.5
SBB30 - 25.5

Max Apron Height Cutout plus
Countertop Thickness

SBB24 - 11.5
SBB30 - 11.5

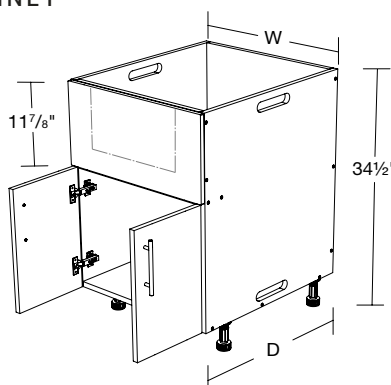

Item Number	Width	Depth	Height
SBB24IB	24	27	34.5
SBB2430IB	24	30	34.5
SBB30IB	30	27	34.5
SBB3030IB	30	30	34.5

FULL-HEIGHT BASE CABINETS

Features

- 3/4" All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 42 for details.
- Full-height base cabinet sides feature two vent cutouts, designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak


BASE CABINET CODING

B 12 18 FH L IB					
B	12	18	FH	L	IB
Cabinet Code	Width	Depth	Full-Height Door	Left Hinge	Full-Back

FULL-HEIGHT SINGLE DOOR BASE CABINET WITH 2 ADJUSTABLE SHELVES

Features

- Two full-depth adjustable shelves
- Available in 18", 21", 24", and 27" depths

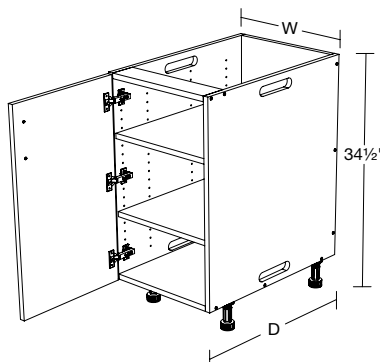

Specify Right or Left Hinged

Item Number	Width	Depth	Height
B1218FHLIB	12	18	34.5
B1218FHRIB	12	18	34.5
B1221FHLIB	12	21	34.5
B1221FHRIB	12	21	34.5
B12FHLIB	12	24	34.5
B12FHRIB	12	24	34.5
B1227FHLIB	12	27	34.5
B1227FHRIB	12	27	34.5

B1518FHLIB	15	18	34.5
B1518FHRIB	15	18	34.5
B1521FHLIB	15	21	34.5
B1521FHRIB	15	21	34.5
B15FHLIB	15	24	34.5
B15FHRIB	15	24	34.5
B1527FHLIB	15	27	34.5
B1527FHRIB	15	27	34.5


B1818FHLIB	18	18	34.5
B1818FHRIB	18	18	34.5
B1821FHLIB	18	21	34.5
B1821FHRIB	18	21	34.5
B18FHLIB	18	24	34.5
B18FHRIB	18	24	34.5
B1827FHLIB	18	27	34.5
B1827FHRIB	18	27	34.5

B2118FHLIB	21	18	34.5
B2118FHRIB	21	18	34.5
B2121FHLIB	21	21	34.5
B2121FHRIB	21	21	34.5
B21FHLIB	21	24	34.5
B21FHRIB	21	24	34.5
B2127FHLIB	21	27	34.5
B2127FHRIB	21	27	34.5

FULL-HEIGHT DOUBLE DOOR BASE CABINET WITH 2 ADJUSTABLE SHELVES

Features

- Two full-depth adjustable shelves
- Available in 18", 21", 24", and 27" depths

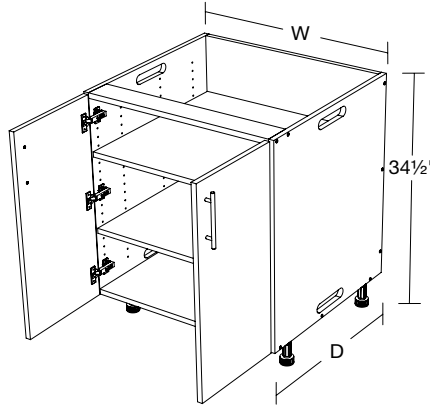

Item Number	Width	Depth	Height
B2418FHIB	24	18	34.5
B2421FHIB	24	21	34.5
B24FHIB	24	24	34.5
B2427FHIB	24	27	34.5

B2718FHIB	27	18	34.5
B2721FHIB	27	21	34.5
B27FHIB	27	24	34.5
B2727FHIB	27	27	34.5

B3018FHIB	30	18	34.5
B3021FHIB	30	21	34.5
B30FHIB	30	24	34.5
B3027FHIB	30	27	34.5


B3318FHIB	33	18	34.5
B3321FHIB	33	21	34.5
B33FHIB	33	24	34.5
B3327FHIB	33	27	34.5

B3618FHIB	36	18	34.5
B3621FHIB	36	21	34.5
B36FHIB	36	24	34.5
B3627FHIB	36	27	34.5

FULL-HEIGHT SINGLE DOOR BASE CABINET WITH 1 ADJUSTABLE SHELF AND 1 ROLL-OUT TRAY

Features

- Roll-out tray features stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Roll-out tray is 6" high by 21³/₄" deep, and the sides and bottom panel are constructed of ³/₄" All-Weatherboard® composite material
- One full-depth adjustable shelf
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21³/₄" deep roll-out tray

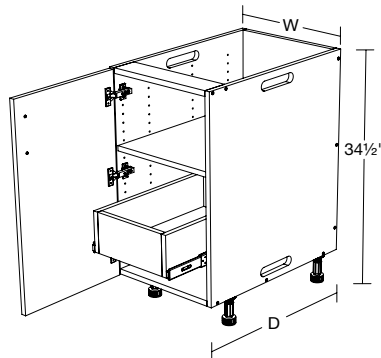

Specify Right or Left Hinged

Item Number	Width	Depth	Height
B12FHLIB-1T	12	24	34.5
B12FHRIB-1T	12	24	34.5
B1227FHLIB-1T*	12	27	34.5
B1227FHRIB-1T*	12	27	34.5

B15FHLIB-1T	15	24	34.5
B15FHRIB-1T	15	24	34.5
B1527FHLIB-1T*	15	27	34.5
B1527FHRIB-1T*	15	27	34.5


B18FHLIB-1T	18	24	34.5
B18FHRIB-1T	18	24	34.5
B1827FHLIB-1T*	18	27	34.5
B1827FHRIB-1T*	18	27	34.5

B21FHLIB-1T	21	24	34.5
B21FHRIB-1T	21	24	34.5
B2127FHLIB-1T*	21	27	34.5
B2127FHRIB-1T*	21	27	34.5

FULL-HEIGHT DOUBLE DOOR BASE CABINET WITH 1 ADJUSTABLE SHELF AND 1 ROLL-OUT TRAY

Features

- Roll-out tray features stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Roll-out tray is 6" high by 21 $\frac{3}{4}$ " deep, and the sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- One full-depth adjustable shelf
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep roll-out tray

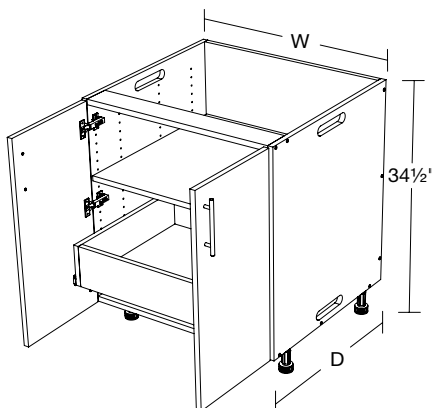


Item Number	Width	Depth	Height
B24FHIB-1T	24	24	34.5
B2427FHIB-1T*	24	27	34.5
B27FHIB-1T	27	24	34.5
B2727FHIB-1T*	27	27	34.5
B30FHIB-1T	30	24	34.5
B3027FHIB-1T*	30	27	34.5
B33FHIB-1T	33	24	34.5
B3327FHIB-1T*	33	27	34.5
B36FHIB-1T	36	24	34.5
B3627FHIB-1T*	36	27	34.5

FULL-HEIGHT SINGLE DOOR BASE CABINET WITH 2 ROLL-OUT TRAYS

Features

- Roll-out trays feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Roll-out trays are 6" high by 21 $\frac{3}{4}$ " deep, and the sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep roll-out tray

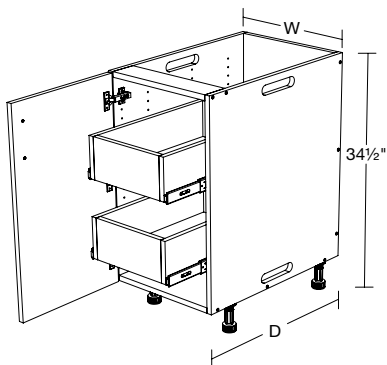


Specify Right or Left Hinged

Item Number	Width	Depth	Height
B12FHLIB-2T	12	24	34.5
B12FHRIB-2T	12	24	34.5
B1227FHLIB-2T*	12	27	34.5
B1227FHRIB-2T*	12	27	34.5
B15FHLIB-2T	15	24	34.5
B15FHRIB-2T	15	24	34.5
B1527FHLIB-2T*	15	27	34.5
B1527FHRIB-2T*	15	27	34.5
B18FHLIB-2T	18	24	34.5
B18FHRIB-2T	18	24	34.5
B1827FHLIB-2T*	18	27	34.5
B1827FHRIB-2T*	18	27	34.5
B21FHLIB-2T	21	24	34.5
B21FHRIB-2T	21	24	34.5
B2127FHLIB-2T*	21	27	34.5
B2127FHRIB-2T*	21	27	34.5

FULL-HEIGHT DOUBLE DOOR BASE CABINET WITH 2 ROLL-OUT TRAYS

Features

- Roll-out trays feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Roll-out trays are 6" high by 21 $\frac{3}{4}$ " deep, and the sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep roll-out tray

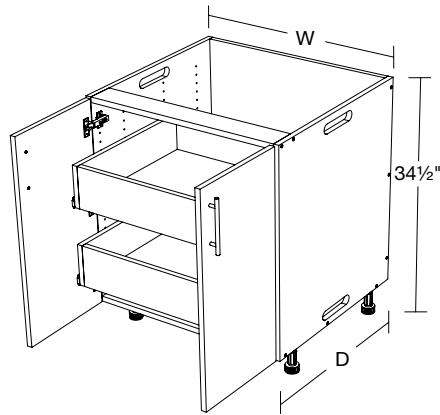


Item Number	Width	Depth	Height
B24FHIB-2T	24	24	34.5
B2427FHIB-2T*	24	27	34.5
B27FHIB-2T	27	24	34.5
B2727FHIB-2T*	27	27	34.5
B30FHIB-2T	30	24	34.5
B3027FHIB-2T*	30	27	34.5
B33FHIB-2T	33	24	34.5
B3327FHIB-2T*	33	27	34.5
B36FHIB-2T	36	24	34.5
B3627FHIB-2T*	36	27	34.5

FULL-HEIGHT SINGLE DOOR BASE CABINET WITH PROPANE PULL-OUT

Features

- Pull-out features stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Includes weatherproof inset handle for easy grip
- Circular cut-out to support a standard 20 lb propane tank
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep pull-out

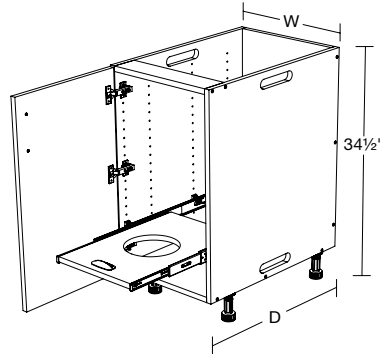


Specify Right or Left Hinged

Item Number	Width	Depth	Height
B18FHLIB-PP	18	24	34.5
B18FHRIB-PP	18	24	34.5
B1827FHLIB-PP	18	27	34.5
B1827FHRIB-PP	18	27	34.5
B21FHLIB-PP	21	24	34.5
B21FHRIB-PP	21	24	34.5
B2127FHLIB-PP	21	27	34.5
B2127FHRIB-PP	21	27	34.5

FULL-HEIGHT SINGLE DOOR BASE CABINET WITH TRASH PULL-OUT

Features

- Pull-out features stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Includes weatherproof inset handle for easy grip
- Includes a removable plastic bin with a 35-quart capacity
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep pull-out

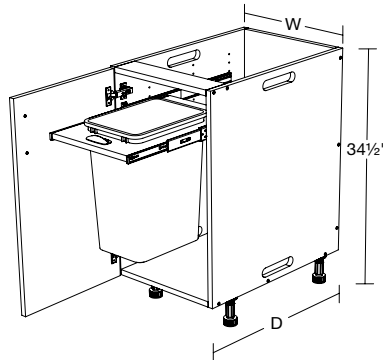

Specify Right or Left Hinged

Item Number	Width	Depth	Height
B18FHLIB-TC	18	24	34.5
B18FHRIB-TC	18	24	34.5
B1827FHLIB-TC	18	27	34.5
B1827FHRIB-TC	18	27	34.5
B21FHLIB-TC	21	24	34.5
B21FHRIB-TC	21	24	34.5
B2127FHLIB-TC	21	27	34.5
B2127FHRIB-TC	21	27	34.5

BLIND BASE CABINETS

Features

- ¾" All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 42 for details.
- Blind base cabinet sides feature two vent cutouts, designed to promote airflow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak

BLIND BASE CABINET CODING

BBCU 39 18 FH L IB					
BBCU Cabinet Code	39 Width	18 Depth	FH Full- Height Door	L Left Hinge	IB Full- Back

BLIND BASE TIP


The Blind Base cabinet is 36" wide. It must be installed from 3" to 9" away from the adjacent wall. This allows the door full clearance and provides a flexible installation range. From the adjacent wall to the far edge of the cabinet, a minimum width of 39" to a maximum width of 45" is required.



BLIND BASE CABINET WITH 2 ADJUSTABLE SHELVES AND FILLERS


Features

- Two adjustable shelves
- 3" filler, 3" & 9" overlay fillers included
- Door width is 12", door opening is 10½"
- Available in 18", 21", 24", and 27" depths

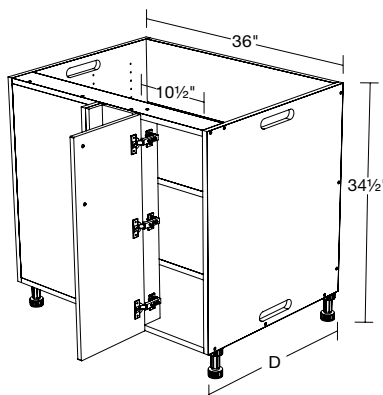

Specify Right or Left Hinged (Left Shown)

Item Number	Width	Depth	Height
BBCU3918FHLIB	36	18	34.5
BBCU3918FHRIB	36	18	34.5
BBCU3921FHLIB	36	21	34.5
BBCU3921FHRIB	36	21	34.5
BBCU39FHLIB	36	24	34.5
BBCU39FHRIB	36	24	34.5
BBCU3927FHLIB	36	27	34.5
BBCU3927FHRIB	36	27	34.5

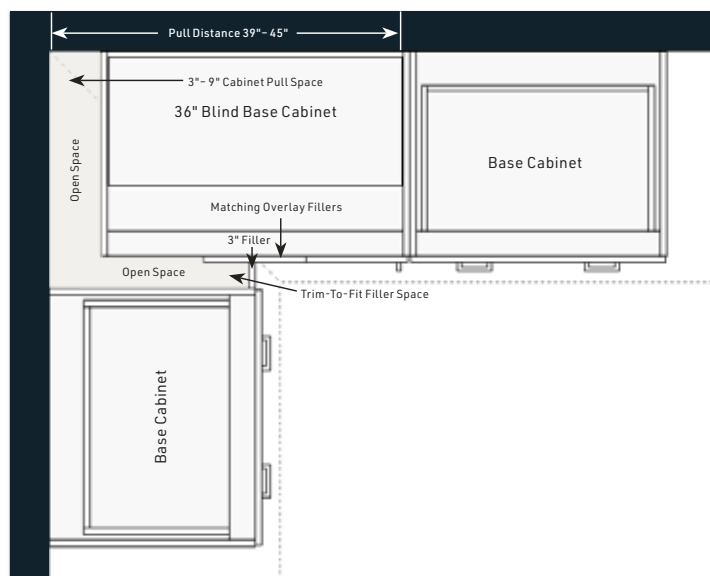

STANDARD BASE CABINETS

Features

- 3/4" All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 42 for details.
- Standard base cabinet sides feature two vent cutouts, designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak


BASE CABINET CODING

B 12 18 L IB				
B	12	18	L	IB
Cabinet Code	Width	Depth	Left Hinge	Full-Back

SINGLE DOOR BASE CABINET WITH 1 DRAWER AND 1 ADJUSTABLE SHELF

Features

- Drawer features stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Drawer box is 4" high by 21 3/4" deep, and the sides and bottom panel are constructed of 3/4" All-Weatherboard® composite material
- One full-depth adjustable shelf
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 3/4" deep drawer box

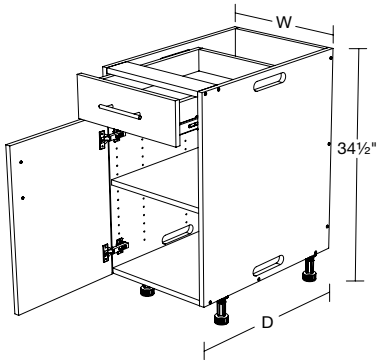


Specify Right or Left Hinged

Item Number	Width	Depth	Height
B12LIB	12	24	34.5
B12RIB	12	24	34.5
B1227LIB	12	27	34.5
B1227RIB	12	27	34.5
B15LIB	15	24	34.5
B15RIB	15	24	34.5
B1527LIB	15	27	34.5
B1527RIB	15	27	34.5
B18LIB	18	24	34.5
B18RIB	18	24	34.5
B1827LIB	18	27	34.5
B1827RIB	18	27	34.5
B21LIB	21	24	34.5
B21RIB	21	24	34.5
B2127LIB	21	27	34.5
B2127RIB	21	27	34.5

DOUBLE DOOR BASE CABINET WITH 1 DRAWER AND 1 ADJUSTABLE SHELF

Features

- Drawer features stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Drawer box is 4" high by 21 $\frac{3}{4}$ " deep, and the sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- One full-depth adjustable shelf
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep drawer box

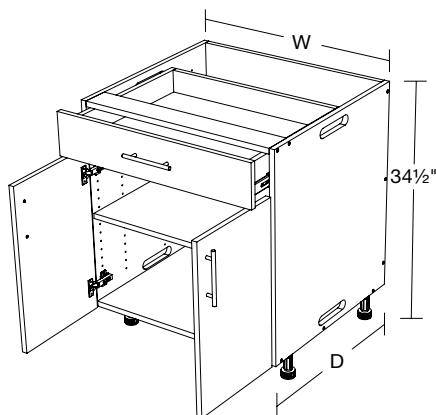


Item Number	Width	Depth	Height
B24IB	24	24	34.5
B2427IB	24	27	34.5
B27IB	27	24	34.5
B2727IB	27	27	34.5
B30IB	30	24	34.5
B3027IB	30	27	34.5
B33IB	33	24	34.5
B3327IB	33	27	34.5
B36IB	36	24	34.5
B3627IB	36	27	34.5

SINGLE DOOR BASE CABINET WITH 1 DRAWER, 1 ADJUSTABLE SHELF AND 1 ROLL-OUT TRAY

Features

- Drawer and roll-out tray feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Drawer box is 4" high by 21 $\frac{3}{4}$ " deep
- Roll-out tray is 6" high by 21 $\frac{3}{4}$ " deep
- Drawer box and roll-out tray sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- One full-depth adjustable shelf
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep drawer box and roll-out tray

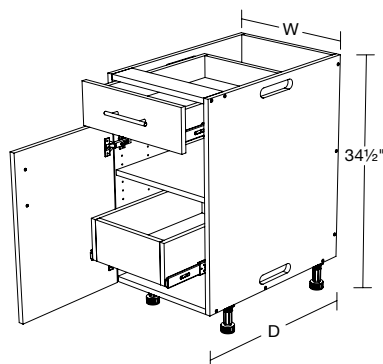


Specify Right or Left Hinged

Item Number	Width	Depth	Height
B12LIB-1T	12	24	34.5
B12RIB-1T	12	24	34.5
B1227LIB-1T*	12	27	34.5
B1227RIB-1T*	12	27	34.5
B15LIB-1T	15	24	34.5
B15RIB-1T	15	24	34.5
B1527LIB-1T*	15	27	34.5
B1527RIB-1T*	15	27	34.5
B18LIB-1T	18	24	34.5
B18RIB-1T	18	24	34.5
B1827LIB-1T*	18	27	34.5
B1827RIB-1T*	18	27	34.5
B21LIB-1T	21	24	34.5
B21RIB-1T	21	24	34.5
B2127LIB-1T*	21	27	34.5
B2127RIB-1T*	21	27	34.5

DOUBLE DOOR BASE CABINET WITH 1 DRAWER, 1 ADJUSTABLE SHELF AND 1 ROLL-OUT TRAY

Features

- Drawer and roll-out tray feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Drawer box is 4" high by 21 $\frac{3}{4}$ " deep
- Roll-out tray is 6" high by 21 $\frac{3}{4}$ " deep
- Drawer box and roll-out tray sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- One full-depth adjustable shelf
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep drawer box and roll-out tray

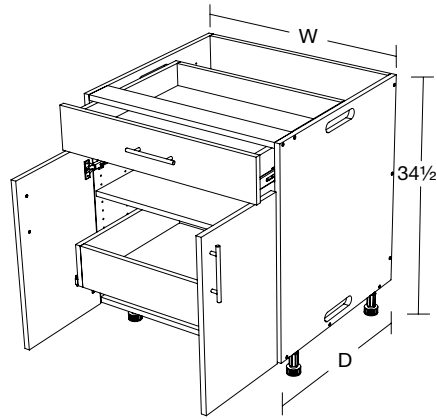


Item Number	Width	Depth	Height
B24IB-1T	24	24	34.5
B2427IB-1T*	24	27	34.5
B27IB-1T	27	24	34.5
B2727IB-1T*	27	27	34.5
B30IB-1T	30	24	34.5
B3027IB-1T*	30	27	34.5
B33IB-1T	33	24	34.5
B3327IB-1T*	33	27	34.5
B36IB-1T	36	24	34.5
B3627IB-1T*	36	27	34.5

SINGLE DOOR BASE CABINET WITH 1 DRAWER AND 2 ROLL-OUT TRAYS

Features

- Drawer and roll-out trays feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Drawer box is 4" high by 21 $\frac{3}{4}$ " deep
- Roll-out trays are 6" high by 21 $\frac{3}{4}$ " deep
- Drawer box and roll-out tray sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep drawer box and roll-out tray

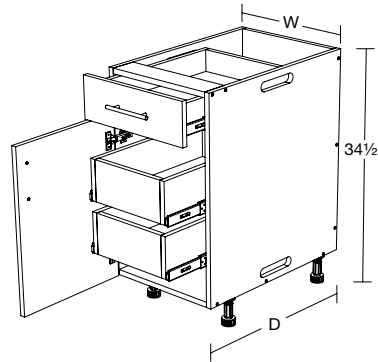


Specify Right or Left Hinged

Item Number	Width	Depth	Height
B12LIB-2T	12	24	34.5
B12RIB-2T	12	24	34.5
B1227LIB-2T*	12	27	34.5
B1227RIB-2T*	12	27	34.5
B15LIB-2T	15	24	34.5
B15RIB-2T	15	24	34.5
B1527LIB-2T*	15	27	34.5
B1527RIB-2T*	15	27	34.5
B18LIB-2T	18	24	34.5
B18RIB-2T	18	24	34.5
B1827LIB-2T*	18	27	34.5
B1827RIB-2T*	18	27	34.5
B21LIB-2T	21	24	34.5
B21RIB-2T	21	24	34.5
B2127LIB-2T*	21	27	34.5
B2127RIB-2T*	21	27	34.5

DOUBLE DOOR BASE CABINET WITH 1 DRAWER AND 2 ROLL-OUT TRAYS

Features

- Drawer and roll-out trays feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Drawer box is 4" high by 21³/₄" deep
- Roll-out trays are 6" high by 21³/₄" deep
- Drawer box and roll-out tray sides and bottom panel are constructed of ³/₄" All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21³/₄" deep drawer box and roll-out tray

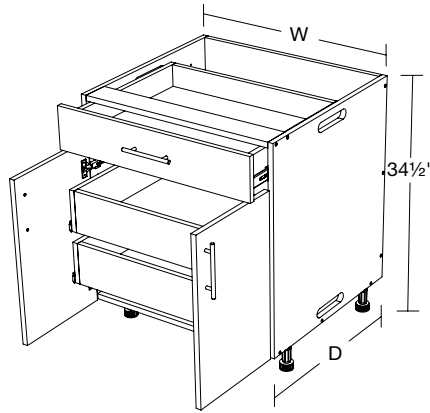

Item Number	Width	Depth	Height
B24IB-2T	24	24	34.5
B2427IB-2T*	24	27	34.5
B27IB-2T	27	24	34.5
B2727IB-2T*	27	27	34.5
B30IB-2T	30	24	34.5
B3027IB-2T*	30	27	34.5
B33IB-2T	33	24	34.5
B3327IB-2T*	33	27	34.5
B36IB-2T	36	24	34.5
B3627IB-2T*	36	27	34.5

DRAWER BASE CABINETS

Features

- $\frac{3}{4}$ " All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 42 for details
- Top drawer front is 6" high
- The middle and bottom drawer front is 12" high for three drawer base cabinets
- The bottom three drawer fronts are 8" high for four drawer base cabinets
- Drawer base cabinet sides feature two vent cutouts, designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak


DRAWER BASE CABINET CODING

B 3D 12 27 IB				
B Cabinet Code	3D Three Drawers	12 Width	27 Depth	IB Full-Back

3 DRAWER BASE CABINET

Features

- Drawers feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Top drawer box is 4" high by 21 $\frac{3}{4}$ " deep
- Middle and bottom drawer box is 7 $\frac{7}{8}$ " high by 21 $\frac{3}{4}$ " deep
- Drawer box sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep drawer boxes

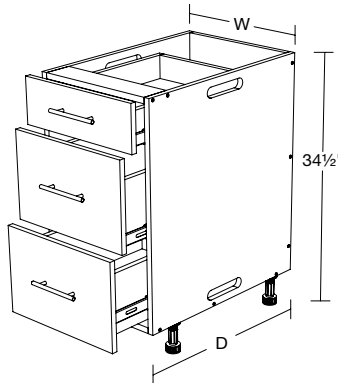


Item Number	Width	Depth	Height
B3D12IB	12	24	34.5
B3D1227IB	12	27	34.5
B3D15IB	15	24	34.5
B3D1527IB	15	27	34.5
B3D18IB	18	24	34.5
B3D1827IB	18	27	34.5
B3D21IB	21	24	34.5
B3D2127IB	21	27	34.5

WIDE 3 DRAWER BASE CABINET

Features

- Drawers feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Top drawer box is 4" high by 21 $\frac{3}{4}$ " deep
- Middle and bottom drawer box is 7 $\frac{7}{8}$ " high by 21 $\frac{3}{4}$ " deep
- Drawer box sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep drawer boxes

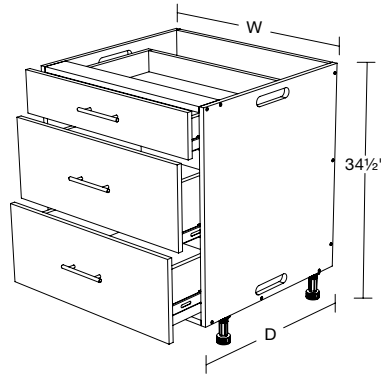


Item Number	Width	Depth	Height
B3D24IB	24	24	34.5
B3D2427IB	24	27	34.5
B3D27IB	27	24	34.5
B3D2727IB	27	27	34.5
B3D30IB	30	24	34.5
B3D3027IB	30	27	34.5
B3D33IB	33	24	34.5
B3D3327IB	33	27	34.5
B3D36IB	36	24	34.5
B3D3627IB	36	27	34.5

4 DRAWER BASE CABINET

Features

- Drawers feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Top drawer box is 4" high by 21 $\frac{3}{4}$ " deep
- Bottom three drawer boxes are 6" high by 21 $\frac{3}{4}$ " deep
- Drawer box sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21 $\frac{3}{4}$ " deep drawer boxes

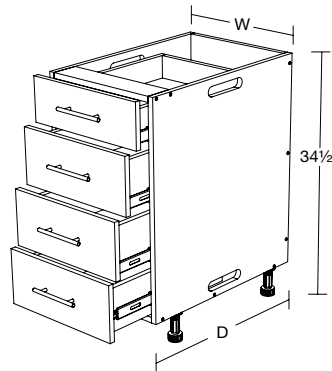


Item Number	Width	Depth	Height
B4D12IB	12	24	34.5
B4D1227IB	12	27	34.5
B4D15IB	15	24	34.5
B4D1527IB	15	27	34.5
B4D18IB	18	24	34.5
B4D1827IB	18	27	34.5
B4D21IB	21	24	34.5
B4D2127IB	21	27	34.5

WIDE 4 DRAWER BASE CABINET

Features

- Drawers feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Top drawer box is 4" high by 21¾" deep
- Bottom three drawer boxes are 6" high by 21¾" deep
- Drawer box sides and bottom panel are constructed of ¾" All-Weatherboard® composite material
- Available in 24" and 27" depth
- *27" deep base cabinets include the same 21¾" deep drawer boxes

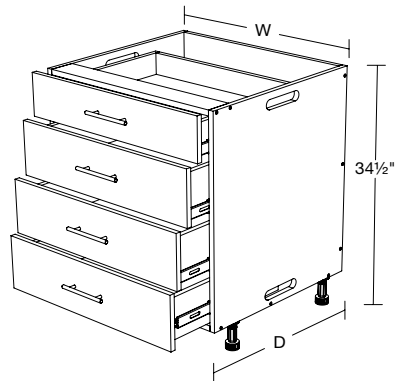

Item Number	Width	Depth	Height
B4D24IB	24	24	34.5
B4D2427IB	24	27	34.5
B4D27IB	27	24	34.5
B4D2727IB	27	27	34.5
B4D30IB	30	24	34.5
B4D3027IB	30	27	34.5
B4D33IB	33	24	34.5
B4D3327IB	33	27	34.5
B4D36IB	36	24	34.5
B4D3627IB	36	27	34.5

SINK BASE CABINETS

Features

- ¾" All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 42 for details.
- Sink base cabinet sides feature two vent cutouts, designed to promote airflow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak


SINK BASE CABINET CODING

SB 24 18 IB			
SB Cabinet Code	24 Width	18 Depth	IB Full-Back

DOUBLE DOOR SINK BASE CABINET WITH FALSE DRAWER FRONT

Features

- False drawer front to accommodate sink
- No adjustable shelf
- Available in 18", 21", 24", and 27" depths

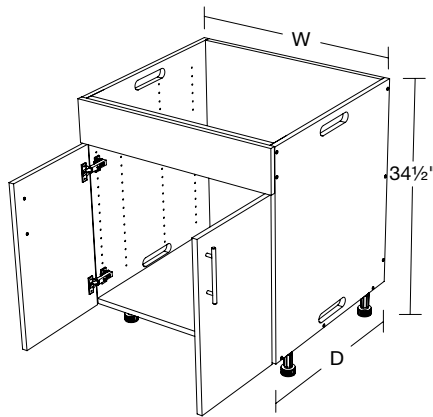

Item Number	Width	Depth	Height
SB2418IB	24	18	34.5
SB2421IB	24	21	34.5
SB24IB	24	24	34.5
SB2427IB	24	27	34.5
SB2718IB	27	18	34.5
SB2721IB	27	21	34.5
SB27IB	27	24	34.5
SB2727IB	27	27	34.5
SB3018IB	30	18	34.5
SB3021IB	30	21	34.5
SB30IB	30	24	34.5
SB3027IB	30	27	34.5
SB3318IB	33	18	34.5
SB3321IB	33	21	34.5
SB33IB	33	24	34.5
SB3327IB	33	27	34.5
SB3618IB	36	18	34.5
SB3621IB	36	21	34.5
SB36IB	36	24	34.5
SB3627IB	36	27	34.5

WALL CABINETS

Features

- 3/4" All-Weatherboard® composite material cabinet construction
- Stainless steel handles are required and sold separately. See page 42 for details

WALL CABINET CODING

W 30 09 15 IB				
W Cabinet Code	30 Width	09 Depth	15 Height	IB Full-Back

PLEASE NOTE

If the sides of the wall cabinet are exposed, make sure to order Wall End Panels to cover the exposed sides.
Do not place bridge cabinets over a heat emitting appliance, even if there is a range hood. The heat could damage the front of the cabinet.

DESIGN TIP

Wall cabinets can provide excellent additional storage.

It is important to space plan when using wall cabinets to ensure there is proper distance from your heat emitting appliance and the start of your wall cabinet run.

If you have an area where you need a narrow storage, you can use a wall cabinet. Simply order an extra set of legs or have the installer build a platform under and cover with toe kick material. Much like you would do in an indoor kitchen.


As the cabinets are full overlay frameless, fillers must be used if the cabinet is going against a side wall.



DOUBLE DOOR BRIDGE WALL CABINET

Features

- No adjustable shelves
- Available in 9", 12", and 15" depths

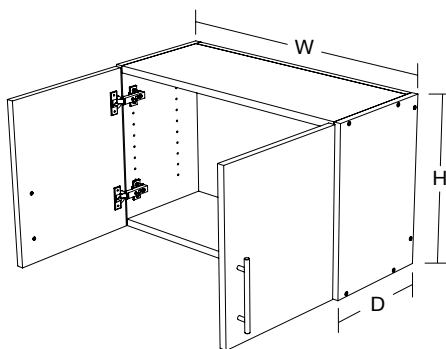

Item Number	Width	Depth	Height
-------------	-------	-------	--------

15" High

W300915IB	30	9	15
W3015IB	30	12	15
W301515IB	30	15	15

W330915IB	33	9	15
W3315IB	33	12	15
W331515IB	33	15	15

W360915IB	36	9	15
W3615IB	36	12	15
W361515IB	36	15	15

18" High

W300918IB	30	9	18
W3018IB	30	12	18
W301518IB	30	15	18

W330918IB	33	9	18
W3318IB	33	12	18
W331518IB	33	15	18

W360918IB	36	9	18
W3618IB	36	12	18
W361518IB	36	15	18

W300924IB	30	9	24
W3024IB	30	12	24
W301524IB	30	15	24


W330924IB	33	9	24
W3324IB	33	12	24
W331524IB	33	15	24

W360924IB	36	9	24
W3624IB	36	12	24
W361524IB	36	15	24

30" HIGH SINGLE DOOR WALL CABINET WITH 2 ADJUSTABLE SHELVES

Features

- Two full-depth adjustable shelves
- Available in 9", 12", and 15" depths

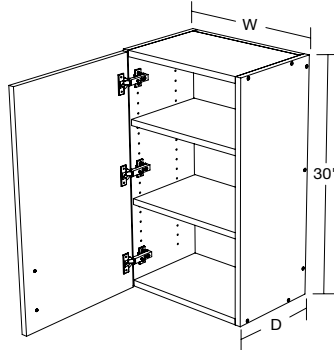

Specify Right or Left Hinged

Item Number	Width	Depth	Height
W120930LIB	12	9	30
W120930RIB	12	9	30
W1230LIB	12	12	30
W1230RIB	12	12	30
W121530LIB	12	15	30
W121530RIB	12	15	30

W150930LIB	15	9	30
W150930RIB	15	9	30
W1530LIB	15	12	30
W1530RIB	15	12	30
W151530LIB	15	15	30
W151530RIB	15	15	30


W180930LIB	18	9	30
W180930RIB	18	9	30
W1830LIB	18	12	30
W1830RIB	18	12	30
W181530LIB	18	15	30
W181530RIB	18	15	30

W210930LIB	21	9	30
W210930RIB	21	9	30
W2130LIB	21	12	30
W2130RIB	21	12	30
W211530LIB	21	15	30
W211530RIB	21	15	30

30" HIGH DOUBLE DOOR WALL CABINET WITH 2 ADJUSTABLE SHELVES

Features

- Two full-depth adjustable shelves
- Available in 9", 12", and 15" depths

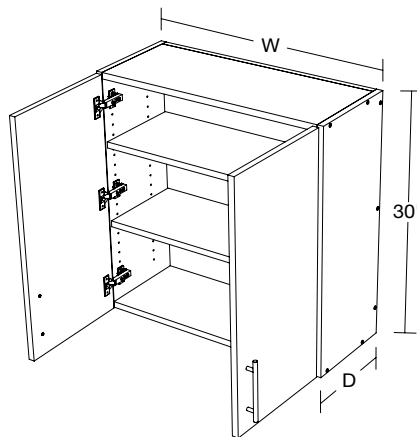

Specify Right or Left Hinged

Item Number	Width	Depth	Height
W240930IB	24	9	30
W2430IB	24	12	30
W241530IB	24	15	30

W270930IB	27	9	30
W2730IB	27	12	30
W271530IB	27	15	30

W300930IB	30	9	30
W3030IB	30	12	30
W301530IB	30	15	30


W330930IB	33	9	30
W3330IB	33	12	30
W331530IB	33	15	30

W360930IB	36	9	30
W3630IB	36	12	30
W361530IB	36	15	30

36" HIGH SINGLE DOOR WALL CABINET WITH 3 ADJUSTABLE SHELVES

Features

- Three full-depth adjustable shelves
- Available in 9", 12", and 15" depths

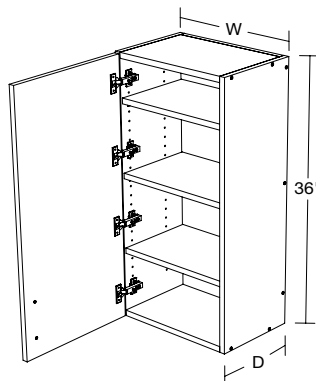

Specify Right or Left Hinged

Item Number	Width	Depth	Height
W120936LIB	12	9	36
W120936RIB	12	9	36
W1236LIB	12	12	36
W1236RIB	12	12	36
W121536LIB	12	15	36
W121536RIB	12	15	36

W150936LIB	15	9	36
W150936RIB	15	9	36
W1536LIB	15	12	36
W1536RIB	15	12	36
W151536LIB	15	15	36
W151536RIB	15	15	36


W180936LIB	18	9	36
W180936RIB	18	9	36
W1836LIB	18	12	36
W1836RIB	18	12	36
W181536LIB	18	15	36
W181536RIB	18	15	36

W210936LIB	21	9	36
W210936RIB	21	9	36
W2136LIB	21	12	36
W2136RIB	21	12	36
W211536LIB	21	15	36
W211536RIB	21	15	36

36" HIGH DOUBLE DOOR WALL CABINET WITH 3 ADJUSTABLE SHELVES

Features

- Three full-depth adjustable shelves
- Available in 9", 12", and 15" depths

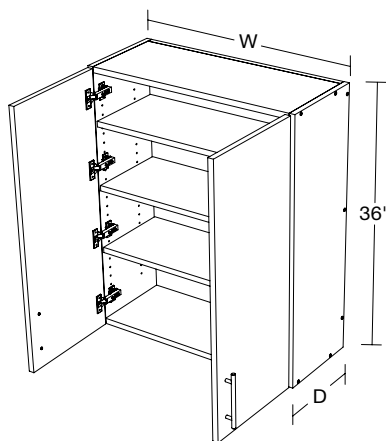

Specify Right or Left Hinged

Item Number	Width	Depth	Height
W240936IB	24	9	36
W2436IB	24	12	36
W241536IB	24	15	36

W270936IB	27	9	36
W2736IB	27	12	36
W271536IB	27	15	36

W300936IB	30	9	36
W3036IB	30	12	36
W301536IB	30	15	36


W330936IB	33	9	36
W3336IB	33	12	36
W331536IB	33	15	36

W360936IB	36	9	36
W3636IB	36	12	36
W361536IB	36	15	36

42" HIGH SINGLE DOOR WALL CABINET WITH 3 ADJUSTABLE SHELVES

Features

- Three full-depth adjustable shelves
- Available in 9", 12", and 15" depths

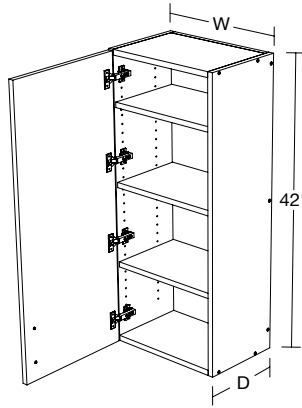

Specify Right or Left Hinged

Item Number	Width	Depth	Height
W120942LIB	12	9	42
W120942RIB	12	9	42
W1242LIB	12	12	42
W1242RIB	12	12	42
W121542LIB	12	15	42
W121542RIB	12	15	42

W150942LIB	15	9	42
W150942RIB	15	9	42
W1542LIB	15	12	42
W1542RIB	15	12	42
W151542LIB	15	15	42
W151542RIB	15	15	42


W180942LIB	18	9	42
W180942RIB	18	9	42
W1842LIB	18	12	42
W1842RIB	18	12	42
W181542LIB	18	15	42
W181542RIB	18	15	42

W210942LIB	21	9	42
W210942RIB	21	9	42
W2142LIB	21	12	42
W2142RIB	21	12	42
W211542LIB	21	15	42
W211542RIB	21	15	42

42" HIGH DOUBLE DOOR WALL CABINET WITH 3 ADJUSTABLE SHELVES

Features

- Three full-depth adjustable shelves
- Available in 9", 12", and 15" depths

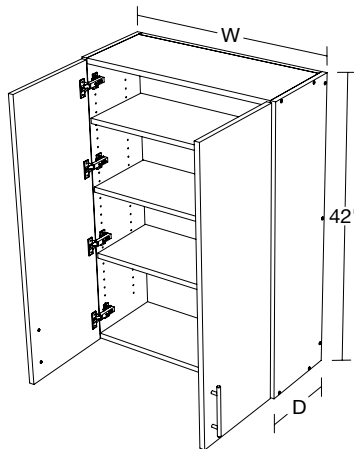

Specify Right or Left Hinged

Item Number	Width	Depth	Height
W240942IB	24	9	42
W2442IB	24	12	42
W241542IB	24	15	42

W270942IB	27	9	42
W2742IB	27	12	42
W271542IB	27	15	42

W300942IB	30	9	42
W3042IB	30	12	42
W301542IB	30	15	42

W330942IB	33	9	42
W3342IB	33	12	42
W331542IB	33	15	42

W360942IB	36	9	42
W3642IB	36	12	42
W361542IB	36	15	42

BLIND WALL CABINETS

Features

- ¾" All-Weatherboard® composite material cabinet construction
- Stainless steel handles are required and sold separately. See page 42 for details

BLIND WALL CABINET CODING

WBCU 27 09 30 L IB				
WBCU Cabinet Code	27 Width	09 Depth	30 Height	IB Full-Back

BLIND WALL TIP


The Blind Wall cabinet is 24" wide. It must be installed from 3" to 9" away from the adjacent wall. This allows the door full clearance and provides a flexible installation range. From the adjacent wall to the far edge of the cabinet, a minimum width of 27" to a maximum width of 33" is required.



BLIND WALL CABINET WITH 2 ADJUSTABLE SHELVES AND FILLERS

Features

- 30" High include two adjustable shelves
- 36" and 42" High include three adjustable shelves
- 3" filler, 3" & 9" overlay fillers included
- Door width is 12", door opening is 10½"
- Available in 9", 12", and 15" depths

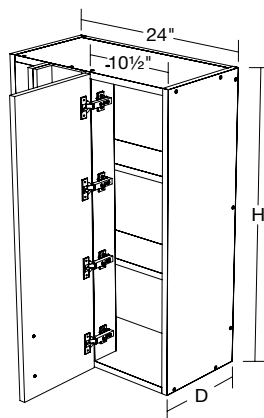

Specify Right or Left Hinged

Item Number	Width	Depth	Height
-------------	-------	-------	--------

30" High


WBCU270930LIB	24	9	30
WBCU270930RIB	24	9	30
WBCU2730LIB	24	12	30
WBCU2730RIB	24	12	30
WBCU271530LIB	24	15	30
WBCU271530RIB	24	15	30

36" High

WBCU270936LIB	24	9	36
WBCU270936RIB	24	9	36
WBCU2736LIB	24	12	36
WBCU2736RIB	24	12	36
WBCU271536LIB	24	15	36
WBCU271536RIB	24	15	36

42" High

WBCU270942LIB	24	9	42
WBCU270942RIB	24	9	42
WBCU2742LIB	24	12	42
WBCU2742RIB	24	12	42
WBCU271542LIB	24	15	42
WBCU271542RIB	24	15	42

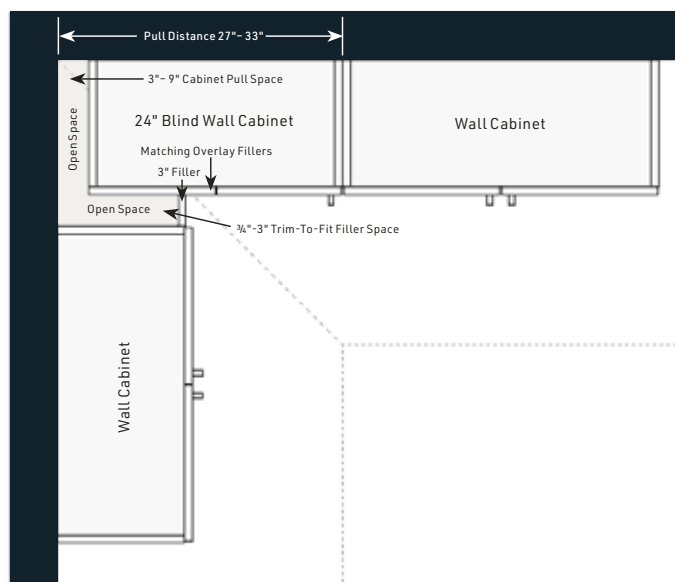

STANDARD UTILITY CABINETS

Features

- $\frac{3}{4}$ " All-Weatherboard® composite material cabinet construction
- Stainless steel handles are required and sold separately.
See page 42 for details


UTILITY CABINET CODING

U 18 18 84 L				
U Cabinet Code	18 Width	18 Depth	84 Height	L Left Hinge

84" HIGH UTILITY CABINET WITH 4 ADJUSTABLE SHELVES

Features

- Four full-depth adjustable shelves
- Available in 18", 21", and 24" depths

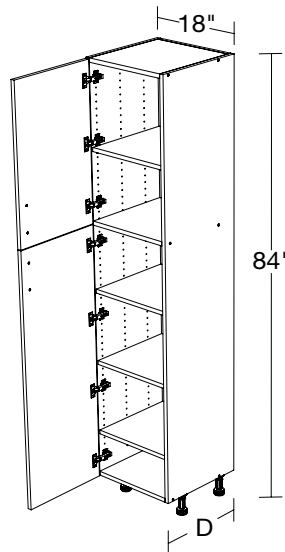


Specify Right or Left Hinged

Item Number	Width	Depth	Height
U181884L	18	18	84
U181884R	18	18	84
U182184L	18	21	84
U182184R	18	21	84
U1884L	18	24	84
U1884R	18	24	84

84" HIGH UTILITY CABINET WITH 1 ADJUSTABLE SHELF AND 4 ROLL-OUT TRAYS

Features

- One full-depth adjustable shelf
- Roll-out trays feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Roll-out trays are 6" high by $21\frac{3}{4}$ " deep
- Roll-out tray sides and bottom panel are constructed of $\frac{3}{4}$ " All-Weatherboard® composite material
- Available in 24" depth only

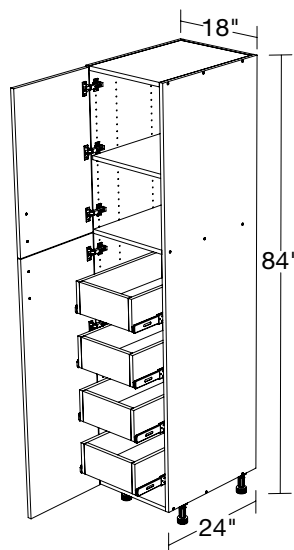


Specify Right or Left Hinged

Item Number	Width	Depth	Height
U1884L-4T	18	24	84
U1884R-4T	18	24	84

90" OR 96" HIGH UTILITY CABINET WITH 5 ADJUSTABLE SHELVES

Features

- Five full-depth adjustable shelves
- Available in 18", 21", and 24" depths

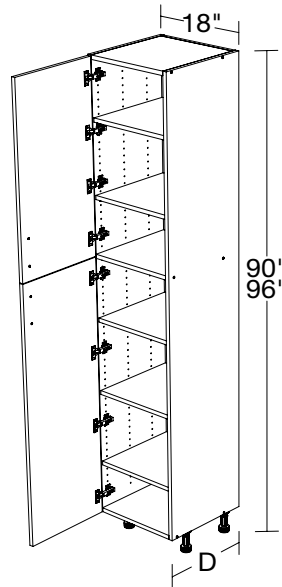

Specify Right or Left Hinged

Item Number	Width	Depth	Height
90" High			

U181890L	18	18	90
U181890R	18	18	90
U182190L	18	21	90
U182190R	18	21	90
U1890L	18	24	90
U1890R	18	24	90


96" High

U181896L	18	18	96
U181896R	18	18	96
U182196L	18	21	96
U182196R	18	21	96
U1896L	18	24	96
U1896R	18	24	96

90" OR 96" HIGH UTILITY CABINET WITH 2 ADJUSTABLE SHELVES AND 4 ROLL-OUT TRAYS

Features

- Two full-depth adjustable shelves
- Roll-out trays feature stainless steel, soft-close, side-mounted, ball bearing drawer runners
- Roll-out trays are 6" high by 21 $\frac{3}{4}$ " deep
- Roll-out tray sides and bottom panel are constructed of $\frac{3}{4}$ " **All-Weatherboard®** composite material
- Available in 24" depth only

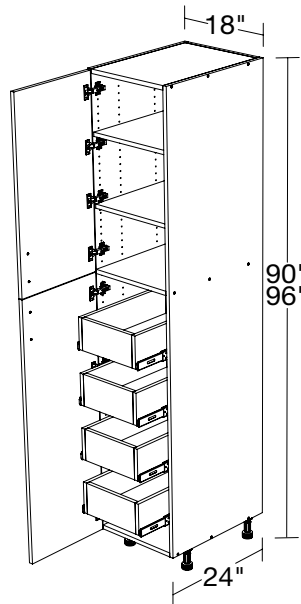

Specify Right or Left Hinged

Item Number	Width	Depth	Height
90" High			

U1890L-4T	18	24	90
U1890R-4T	18	24	90


96" High

U1896L-4T	18	24	96
U1896R-4T	18	24	96

36" HIGH NON-VENTED BASE CABINET END PANEL - UNIVERSAL

Features

- Panels are designed to be flush with the door. Field trimmable to desired depth
- Use to cover cabinet sides that are exposed to sunlight and other weather elements
- This end panel should be used when the cabinetry is installed against a wall and should be installed flush to the All-Weatherboard® cabinet back

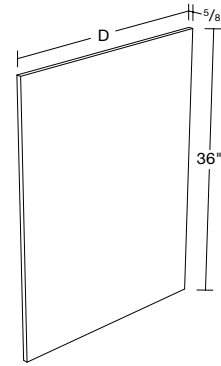


BEP18
BEP21
BEP24
BEP27
BEP30

18 7/8" D, 21 7/8" D, 24 7/8" D, 27 7/8" D, 30 7/8" D

30" HIGH VENTED BASE CABINET END PANEL - UNIVERSAL

Features

- Panels are designed to be flush with the door. Field trimmable to desired depth
- Use to cover cabinet sides that are exposed to sunlight and other weather elements
- This end panel should be used when the cabinetry is free standing and should be installed flush with the additional Island End Panel used to cover the All-Weatherboard® cabinet back
- Vent cutouts are designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak
- Black vent hole covers are available and sold separately. See page 39 for details




WSBEP19.530
WSBEP22.530
WSBEP25.530
WSBEP28.530
WSBEP31.530

19 1/2" D, 22 1/2" D, 25 1/2" D, 28 1/2" D, 31 1/2" D

36" HIGH VENTED BASE CABINET END PANEL - LEFT END

Features

- Panels are designed to be flush with the door. Field trimmable to desired depth
- Use to cover cabinet sides that are exposed to sunlight and other weather elements
- This end panel should be used when the cabinetry is free standing and should be installed flush with the additional Island End Panel used to cover the All-Weatherboard® cabinet back
- Vent cutouts are designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak
- Black vent hole covers are available and sold separately. See page 39 for details

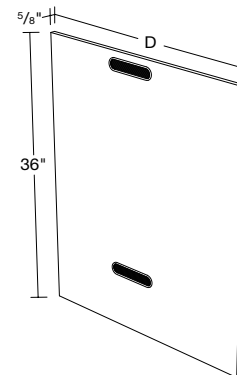


BEP24VL
BEP27VL
BEP30VL

25 1/2" D, 28 1/2" D, 31 1/2" D

36" HIGH VENTED BASE CABINET END PANEL - RIGHT END

Features

- Panels are designed to be flush with the door. Field trimmable to desired depth
- Use to cover cabinet sides that are exposed to sunlight and other weather elements
- This end panel should be used when the cabinetry is free standing and should be installed flush with the additional Island End Panel used to cover the All-Weatherboard® cabinet back
- Vent cutouts are designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak
- Black vent hole covers are available and sold separately. See page 39 for details

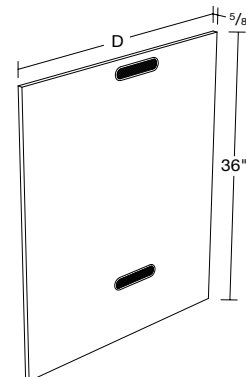


BEP24VR
BEP27VR
BEP30VR

25 1/2" D, 28 1/2" D, 31 1/2" D

WALL CABINET END PANELS

Features

- Panels are designed to be flush with the door. Field trimmable to desired depth
- Use to cover cabinet sides that are exposed to sunlight and other weather elements
- This end panel should be used when the cabinetry is installed against a wall and should be installed flush to the All-Weatherboard® cabinet back




9 $\frac{7}{8}$ " D, 12 $\frac{7}{8}$ " D, 15 $\frac{7}{8}$ " D

WEP0930A
WEP0936A
WEP0942A
WEP1230A
WEP1236A
WEP1242A
WEP1530A
WEP1536A
WEP1542A

42" HIGH NON-VENTED BASE CABINET END PANEL - UNIVERSAL

Features

- Panels are designed to be flush with the door. Field trimmable to desired depth
- Use to cover cabinet sides that are exposed to sunlight and other weather elements
- This end panel should be used when the cabinetry is free standing, and a Bar Riser Kit is needed. It should be installed flush with the additional Island End Panel used to cover the All-Weatherboard® Bar Riser Kit

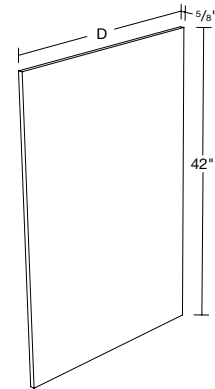


23 $\frac{1}{2}$ " D, 26 $\frac{1}{2}$ " D, 29 $\frac{1}{2}$ " D, 32 $\frac{1}{2}$ " D, 35 $\frac{1}{2}$ " D

BTP23
BTP26
BTP29
BTP32
BTP35

UTILITY CABINET END PANELS - 2 SEPARATE PANELS

Features

- Panels are designed to be flush with the door. Field trimmable to desired depth
- Use to cover cabinet sides that are exposed to sunlight and other weather elements
- Ships in two separate panels and are used to cover the sides of Utility Cabinets
- This end panel should be used when the cabinetry is installed against a wall and should be installed flush to the All-Weatherboard® cabinet back




18 $\frac{7}{8}$ " D, 21 $\frac{7}{8}$ " D, 24 $\frac{7}{8}$ " D

TEP1885
TEP1891
TEP1897
TEP2185
TEP2191
TEP2197
TEP2485
TEP2491
TEP2497

48" ISLAND END PANEL - FIELD TRIMMABLE

Features

- Field trimmable to desired width and height
- Use to cover cabinet backs that are exposed to sunlight and other weather elements
- This end panel should be used when the cabinetry is free standing and should be installed flush to the All-Weatherboard® cabinet sides. Additional Base End Panels (vented or non-vented) should be used to cover the exposed cabinet sides
- *IPL4848 measures 48" W x 47 $\frac{1}{2}$ " H

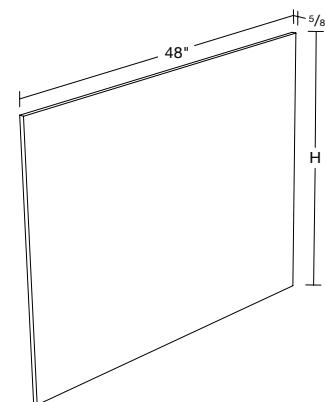


30" H, 36" H, 42" H, 47 $\frac{1}{2}$ " H

IPL4830
IPL4836
IPL4842
IPL4848

8' FINISHED TOE KICK - MATCHES DOOR COLOR

Features

- Available in all finishes
- Will need to be cut to fit on the job site
- Toe kick clips will need to be added to allow attachment to the legs when needed

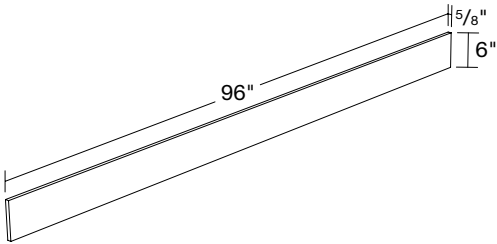


96" Wide
FS696A

ROLL-OUT TRAYS

Features

- 3/4" All-Weatherboard® composite material construction, 4-sides and bottom panel
- Soft-close, side-mounted, ball bearing stainless steel runners and screws
- ROT12 fits 12" wide cabinet, etc.
- Field installed

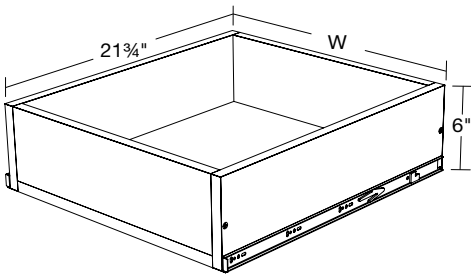


ROT12-FG
ROT15-FG
ROT18-FG
ROT21-FG
ROT24-FG
ROT27-FG
ROT30-FG
ROT33-FG
ROT36-FG

3" WIDE FILLERS

Features

- Available in all finishes



30" Tall 84" Tall

FS330A FS384A

36" Tall 90" Tall

FS336A FS390A

42" Tall 96" Tall

FS342A FS396A

6" WIDE FILLERS

Features

- Available in all finishes

PLEASE NOTE

6"x 96" filler can also be modified on site to be used as a matching toe kick once cabinets are installed on legs



30" Tall 42" Tall


FS630A FS642A

36" Tall 96" Tall

FS636A FS696A

36" HIGH BAR RISER KIT**Features**


- 3/4" All-Weatherboard® composite material cabinet construction
- 4" deep by 36" high
- Requires BTP for field installation to match the cabinet doors

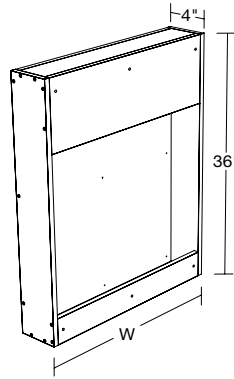

BRK12 BRK40
BRK15 BRK41
BRK18 BRK42
BRK21 BRK43
BRK24 BRK44
BRK27 BRK45
BRK30 BRK46
BRK33 BRK47
BRK36 BRK48
BRK39 BRK49

8" CORBEL COUNTERTOP SUPPORT BRACKET**Features**


- Available in all finishes
- Requires stainless steel installation screws, sold separately



CBL8

30-PACK STAINLESS STEEL CABINET JOINING SCREW KIT - 1 1/4"**Features**

- Square Head Bit included
- Used for joining cabinets together and for installing Matching Panels and Corbels
- Required for installation
- Screws sold separately
- Please see page 56 for installation guide




30 Pack

WSSS1.25-SCREW KIT

CABINET TYPE	QTY	LOCATION
Bases	2	Front Edge
Island Base	4	Front & Back Edges
Bar Base	4	Front & Back Edges
Walls up to 30" H	2	Front Edge
Walls 36" & 42" H	3	Front Edge

BLACK POLYMER VENTALLATION GRILL KIT**Features**

- Designed to fit vent cutouts for a decorative finish
- Promotes the release of excess LP and NG gas the could build-up within the cabinetry
- Includes grill vents to keep pests out of the cabinetry

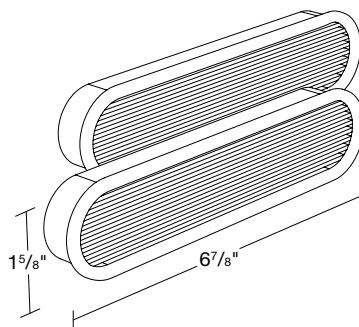


WS-VENT-KIT-BLACK

4-PACK SURE LEVEL STAINLESS STEEL CABINET LEGS

Features

- Includes 4 316 stainless steel legs, 4 mounting plates, and 316 stainless steel screws
- Height adjustment from 4" to 5 ⁷/₁₆"
- Each leg rated for 2,000 lb static load

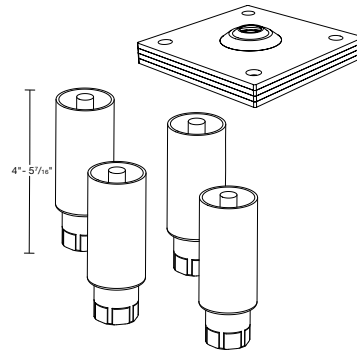


SS-LEGS-4PK

STAINLESS STEEL TOE KICK LEG CLIPS

Features

- Durable U-Shaped clip for attaching toe kick to stainless steel legs
- Includes Clip and screw
- Available in Single pack or pack of four
- See install guide on page 53 for installation instructions




PLS-TK-CLIP-1PK

PLS-TK-CLIP-4PK

4-PACK SURE LEVEL POLYMER CABINET LEGS

Features

- Includes 4 adjustable legs
- 4 mounting plates, 4 toe kick clips and #316 stainless steel screws
- Height adjustment: Short stem: 3 ³/₄" - 5 ¹/₄"
- Each leg rated for 330 lb static load

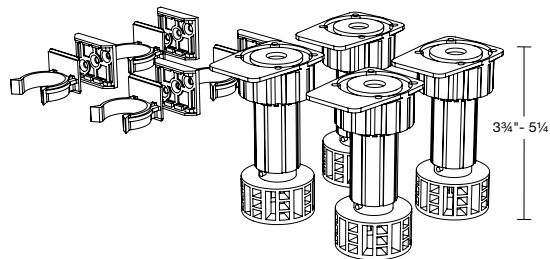

WS-PLASTIC-LEGS


OUTDOOR HDPE BAR HEIGHT STOOL

STOOL-BH


Features

- Full HDPE construction
- Designed to support 350 lbs.
- Marine-grade stainless steel hardware
- Ships assembled

Available Colors




Shell White




Pitch Black



Teak



Dark Ash

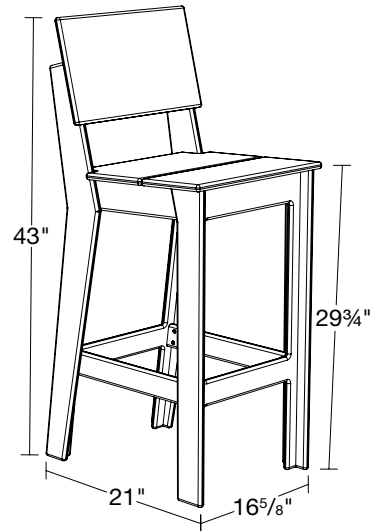


OUTDOOR HDPE COUNTER HEIGHT STOOL

STOOL-CH


Features

- Full HDPE construction
- Designed to support 350 lbs.
- Marine-grade stainless steel hardware
- Ships assembled


Available Colors




Shell White




Pitch Black



Teak



Dark Ash

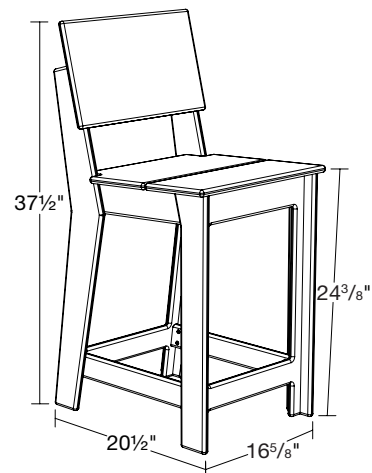

CONTOURED POLISHED C-PULL HANDLE - MARINE GRADE STAINLESS STEEL

DH-00171

Features

- #316 Stainless steel handle with screws
- 4 1/4" overall length
- 3 15/16" center to center



EURO BAR PULL HANDLE - MARINE GRADE STAINLESS STEEL

DH-21021

Features

- 316 Stainless steel handle with screws
- 7 9/32" overall length
- 5 1/32" center to center



WIDE BRUSHED C-PULL HANDLE - MARINE GRADE STAINLESS STEEL

DH-45170

Features

- 316 Stainless steel handle with screws
- 4 1/16" overall length
- 3 3/4" center to center



PROFESSIONAL BAR PULL HANDLE - MARINE GRADE STAINLESS STEEL

DH-92170

Features

- 316 Stainless steel handle with screws
- 8 3/4" overall length
- 7 1/2" center to center

**PLEASE NOTE**

Make sure to check the width of your drawer front.
The handle fits drawer fronts of 18" wide or more.

Fits all Miami drawer fronts

APPLIANCE BASE CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)	QUANTITY	DRAWER/ PANEL FRONT (Part Name)	DRAWER/PANEL FRONT DIMENSIONS (Width x Height x Thickness)
GRILL BASE - (27" & 30" DEEP)						
GB36IB	2	Door1818	17 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF3612	35 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
GB42IB	2	Door2118	20 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF4212	41 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
GB48IB	2	Door2418	23 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF4812	47 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
EXTENDED APRON GRILL TWO DRAWER BASE - (30" DEEP)						
GBP48IB				1	GrillAF4818	47 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF2411.5	23 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
FOUR DOOR GRILL BASE - (30" DEEP)						
GB60IB	4	Door1518	14 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF6012	59 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SIDE BURNER BASE - (27" & 30" DEEP)						
SBB15LIB	1	Door1518	14 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF1512	14 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SBB15RIB	1	Door1518	14 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF1512	14 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SBB18LIB	1	Door1818	17 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF1812	17 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SBB18RIB	1	Door1818	17 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF1812	17 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SBB21LIB	1	Door2118	20 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF2112	20 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SBB21RIB	1	Door2118	20 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF2112	20 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SBB24IB	2	Door1218	11 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF2412	23 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
SBB30IB	2	Door1518	14 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	GrillAF3012	29 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
KAMADO GRILL BASE - (27" DEEP)						
B302718FHIB	2	Door1518	14 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B362718FHIB	2	Door1818	17 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "			

BASE CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)	QUANTITY	DRAWER/ PANEL FRONT (Part Name)	DRAWER/PANEL FRONT DIMENSIONS (Width x Height x Thickness)
STANDARD FULL-HEIGHT BASE WITH PROPANE PULL-OUT - (24" & 27" DEEP)						
B18FHLIB-PP	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHRIB-PP	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHLIB-PP	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHLIB-PP	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
STANDARD FULL-HEIGHT BASE WITH TRASHCAN PULL-OUT- (24" & 27" DEEP)						
B18FHLIB-TC	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHRIB-TC	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHLIB-TC	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHLIB-TC	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			

BASE CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)	QUANTITY	DRAWER/ PANEL FRONT (Part Name)	DRAWER/PANEL FRONT DIMENSIONS (Width x Height x Thickness)
STANDARD FULL-HEIGHT BASE WITH 1 ROLL-OUT TRAY - (24" & 27" DEEP)						
B12FHLIB-1T	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B12FHRIB-1T	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B15FHLIB-1T	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B15FHRIB-1T	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHLIB-1T	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHRIB-1T	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHLIB-1T	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHRIB-1T	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B24FHIB-1T	2	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B27FHIB-1T	2	Door13.530	13 ³ / ₄ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B30FHIB-1T	2	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B33FHIB-1T	2	Door16.530	16 ³ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B36FHIB-1T	2	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
STANDARD FULL-HEIGHT BASE WITH 2 ROLL-OUT TRAYS - (24" & 27" DEEP)						
B12FHLIB-2T	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B12FHRIB-2T	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B15FHLIB-2T	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B15FHRIB-2T	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHLIB-2T	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHRIB-2T	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHLIB-2T	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHRIB-2T	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B24FHIB-2T	2	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B27FHIB-2T	2	Door13.530	13 ³ / ₄ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B30FHIB-2T	2	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B33FHIB-2T	2	Door16.530	16 ³ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B36FHIB-2T	2	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
STANDARD DOOR/DRAWER BASE WITH 1 ROLL-OUT TRAY- (24" & 27" DEEP)						
B12LIB-1T	1	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B12RIB-1T	1	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B15LIB-1T	1	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B15RIB-1T	1	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B18LIB-1T	1	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B18RIB-1T	1	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B21LIB-1T	1	Door2124	20 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B21RIB-1T	1	Door2124	20 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B24IB-1T	2	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF246	23 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B27IB-1T	2	Door13.524	13 ³ / ₄ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF276	26 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B30IB-1T	2	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF306	29 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B33IB-1T	2	Door16.524	16 ³ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF336	32 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B36IB-1T	2	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF366	35 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "

BASE CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)	QUANTITY	DRAWER/ PANEL FRONT (Part Name)	DRAWER/PANEL FRONT DIMENSIONS (Width x Height x Thickness)
STANDARD DOOR/DRAWER BASE WITH 2 ROLL-OUT TRAYS - (24" & 27" DEEP)						
B12LIB-2T	1	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B12RIB-2T	1	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B15LIB-2T	1	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B15RIB-2T	1	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B18LIB-2T	1	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B18RIB-2T	1	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B21LIB-2T	1	Door2124	20 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B21RIB-2T	1	Door2124	20 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B24IB-2T	2	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF246	23 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B27IB-2T	2	Door13.524	13 ³ / ₄ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF276	26 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B30IB-2T	2	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF306	29 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B33IB-2T	2	Door16.524	16 ³ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF336	32 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B36IB-2T	2	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF366	35 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
STANDARD DOOR/DRAWER BASE - (24" & 27" DEEP)						
B12LIB	1	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B12RIB	1	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B15LIB	1	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B15RIB	1	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B18LIB	1	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B18RIB	1	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B21LIB	1	Door2124	20 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B21RIB	1	Door2124	20 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B24IB	2	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF246	23 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B27IB	2	Door13.524	13 ³ / ₄ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF276	26 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B30IB	2	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF306	29 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B33IB	2	Door16.524	16 ³ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF336	32 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
B36IB	2	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF366	35 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
STANDARD FULL-HEIGHT BASE - (18", 21", 24", & 27" DEEP)						
B12FHLIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B12FHRIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B15FHLIB	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B15FHRIB	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHLIB	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B18FHRIB	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHLIB	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B21FHRIB	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B24FHIB	2	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B27FHIB	2	Door13.530	13 ³ / ₄ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B30FHIB	2	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B33FHIB	2	Door16.530	16 ³ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
B36FHIB	2	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			

BASE CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)	QUANTITY	DRAWER/ PANEL FRONT (Part Name)	DRAWER/PANEL FRONT DIMENSIONS (Width x Height x Thickness)
STANDARD THREE DRAWER BASE - (24" & 27" DEEP)						
B3D12IB				1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF1211.5	11 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D15IB				1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF1511.5	14 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D18IB				1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF1811.5	17 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D21IB				1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF2111.5	20 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D24IB				1	ShallowDF246	23 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF2411.5	23 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D27IB				1	ShallowDF276	26 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF2711.5	26 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D30IB				1	ShallowDF336	29 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF3311.5	29 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D33IB				1	ShallowDF336	32 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF3311.5	32 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
B3D36IB				1	ShallowDF366	35 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				2	DeepDF3611.5	35 ⁷ / ₈ " x 11 ⁷ / ₈ " x 5 ⁵ / ₈ "
STANDARD FOUR DRAWER BASE - (24" & 27" DEEP)						
B4D12IB				1	ShallowDF126	11 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF128	11 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D15IB				1	ShallowDF156	14 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF158	14 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D18IB				1	ShallowDF186	17 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF188	17 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D21IB				1	ShallowDF216	20 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF218	20 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D24IB				1	ShallowDF246	23 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF248	23 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D27IB				1	ShallowDF276	26 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF278	26 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D30IB				1	ShallowDF306	29 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF308	29 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D33IB				1	ShallowDF336	32 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF338	32 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "
B4D36IB				1	ShallowDF366	35 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
				3	MiddleDF368	35 ⁷ / ₈ " x 7 ⁷ / ₈ " x 5 ⁵ / ₈ "

BASE CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)	QUANTITY	DRAWER/ PANEL FRONT (Part Name)	DRAWER/PANEL FRONT DIMENSIONS (Width x Height x Thickness)
STANDARD SINK BASE - (18", 21", 24", & 27" DEEP)						
SB24IB	2	Door1224	11 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF246	23 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
SB27IB	2	Door13.524	13 ³ / ₄ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF276	26 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
SB30IB	2	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	1	ShallowDF306	29 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
SB33IB	2	Door16.524	16 ³ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	2	ShallowDF336	32 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
SB36IB	2	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "	2	ShallowDF366	35 ⁷ / ₈ " x 5 ⁷ / ₈ " x 5 ⁵ / ₈ "
STANDARD BLIND BASE - (18", 21", 24", & 27" DEEP)						
BBCU39FHLIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			
BBCU39FHRIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "			

WALL CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)
15" HIGH WALL BRIDGE - (9", 12", & 15" DEEP)			
W3015IB	2	Door1515	14 ⁷ / ₈ " x 14 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3315IB	2	Door16.515	16 ³ / ₈ " x 14 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3615IB	2	Door1815	17 ⁷ / ₈ " x 14 ⁷ / ₈ " x 5 ⁵ / ₈ "
18" HIGH WALL BRIDGE - (9", 12", & 15" DEEP)			
W3018IB	2	Door1518	14 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3318IB	2	Door16.518	16 ³ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3618IB	2	Door1818	17 ⁷ / ₈ " x 17 ⁷ / ₈ " x 5 ⁵ / ₈ "
24" HIGH WALL BRIDGE - (9", 12", & 15" DEEP)			
W3024IB	2	Door1524	14 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3324IB	2	Door16.524	16 ³ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3624IB	2	Door1824	17 ⁷ / ₈ " x 23 ⁷ / ₈ " x 5 ⁵ / ₈ "
30" HIGH STANDARD WALL - (9", 12", & 15" DEEP)			
W1230LIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W1230RIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W1530LIB	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W1530RIB	1	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W1830LIB	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W1830RIB	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W2130LIB	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W2130RIB	1	Door2130	20 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W2430IB	2	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W2730IB	2	Door13.530	13 ³ / ₄ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3030IB	2	Door1530	14 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3330IB	2	Door16.530	16 ³ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
W3630IB	2	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "

WALL CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)
42" HIGH STANDARD WALL - (9", 12", & 15" DEEP)			
W1242LIB	1	Door1242	11 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W1242RIB	1	Door1242	11 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W1542LIB	1	Door1542	14 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W1542RIB	1	Door1542	14 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W1842LIB	1	Door1842	17 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W1842RIB	1	Door1842	17 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W2142LIB	1	Door2142	20 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W2142RIB	1	Door2142	20 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W2442IB	2	Door1242	11 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W2742IB	2	Door13.542	13 ³ / ₄ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W3042IB	2	Door1542	14 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W3342IB	2	Door16.542	16 ³ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
W3642IB	2	Door1842	17 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
30" HIGH BLIND WALL - (9", 12", & 15" DEEP)			
WBCU2730LIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x ⁵ / ₈ "
WBCU2730RIB	1	Door1230	11 ⁷ / ₈ " x 29 ⁷ / ₈ " x ⁵ / ₈ "
36" HIGH BLIND WALL - 36" HIGH - (9", 12", & 15" DEEP)			
WBCU2736LIB	1	Door1236	11 ⁷ / ₈ " x 35 ⁷ / ₈ " x ⁵ / ₈ "
WBCU2736RIB	1	Door1236	11 ⁷ / ₈ " x 35 ⁷ / ₈ " x ⁵ / ₈ "
42" HIGH BLIND WALL - (9", 12", & 15" DEEP)			
WBCU2742LIB	1	Door1242	11 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "
WBCU2742RIB	1	Door1242	11 ⁷ / ₈ " x 41 ⁷ / ₈ " x ⁵ / ₈ "

TALL CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)
84" TALL UTILITY CABINET - (18", 21", & 24" DEEP)			
U1884L	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x ⁵ / ₈ "
U1884R	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x ⁵ / ₈ "
90" TALL UTILITY CABINET - (18", 21", & 24" DEEP)			
U1890L	1	Door1836	17 ⁷ / ₈ " x 35 ⁷ / ₈ " x ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x ⁵ / ₈ "
U1890R	1	Door1836	17 ⁷ / ₈ " x 35 ⁷ / ₈ " x ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x ⁵ / ₈ "


TALL CABINETS

ITEM NUMBER	QUANTITY	DOOR (Part Name)	DOOR DIMENSIONS (Width x Height x Thickness)
96" TALL UTILITY CABINET - (18", 21", & 24" DEEP)			
U1896L	1	Door1836	17 ⁷ / ₈ " x 41 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "
U1896R	1	Door1842	17 ⁷ / ₈ " x 41 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "
84" TALL UTILITY CABINET WITH 4 ROLL-OUT TRAYS - (24" DEEP)			
U1884L-4T	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "
U1884R-4T	1	Door1830	17 ⁷ / ₈ " x 29 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "
90" TALL UTILITY CABINET WITH 4 ROLL-OUT TRAYS - (24" DEEP)			
U1890L-4T	1	Door1836	17 ⁷ / ₈ " x 35 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "
U1890R-4T	1	Door1836	17 ⁷ / ₈ " x 35 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "
96" TALL UTILITY CABINET WITH 4 ROLL-OUT TRAYS - (24" DEEP)			
U1896L-4T	1	Door1842	17 ⁷ / ₈ " x 41 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "
U1896R-4T	1	Door1842	17 ⁷ / ₈ " x 41 ⁷ / ₈ " x 5 ⁵ / ₈ "
	1	Door1849	17 ⁷ / ₈ " x 49 ³ / ₈ " x 5 ⁵ / ₈ "

PLASTIC LEVELING LEG ASSEMBLY



Simple assembly is required for each leveling leg.

For easier handling and to avoid damage remove doors and drawers from the cabinet. Then, using two or more people, place the cabinet upside down on a protected surface.

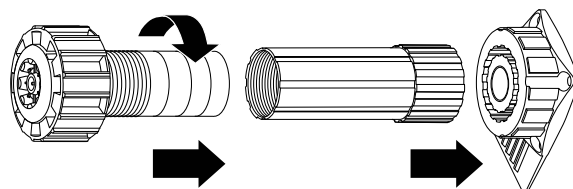




1. Place the two front leg brackets $3\frac{1}{2}$ " from the front edge with the support plate overlapping the end panel flush to the edge.

2. Place the two back leg brackets flush with back and side panels.

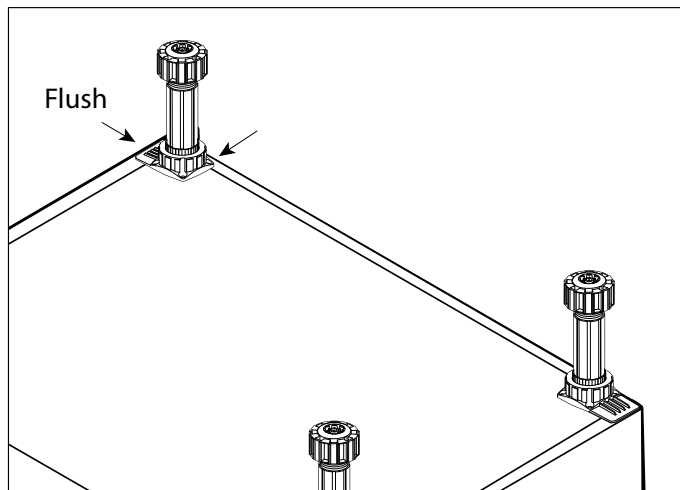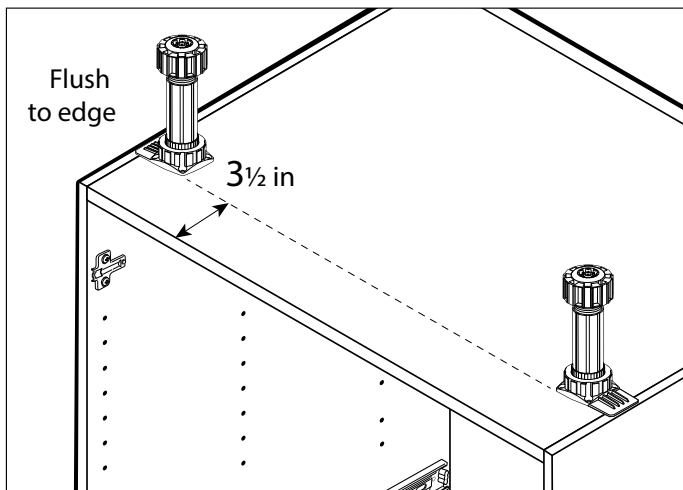


3. Use a #2 Phillips bit to attach the legs using the supplied stainless steel screws. **DO NOT OVERTIGHTEN!**



4. Adjust the leveling legs up or down to bring the cabinet to a level plumb position.

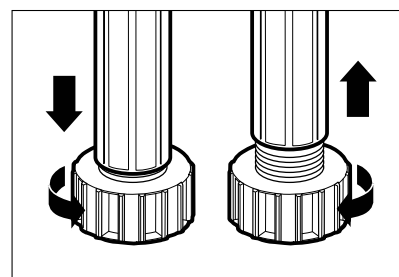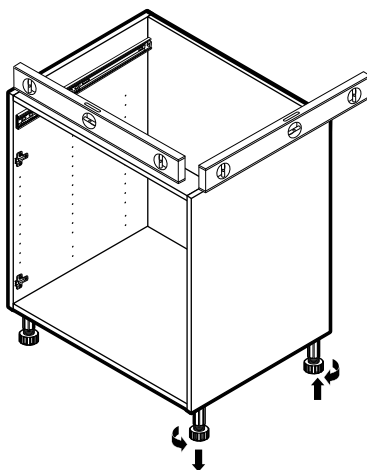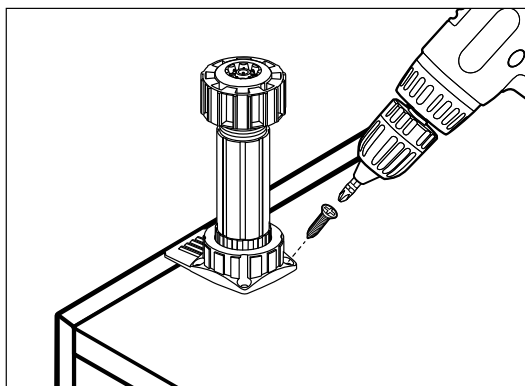


1. Lay the trimmed toe kick panel in front of the cabinet against the leveling legs. Mark the location of each leg on the back of the panel. Clips are not needed on all leg locations, but enough for a secure hold.

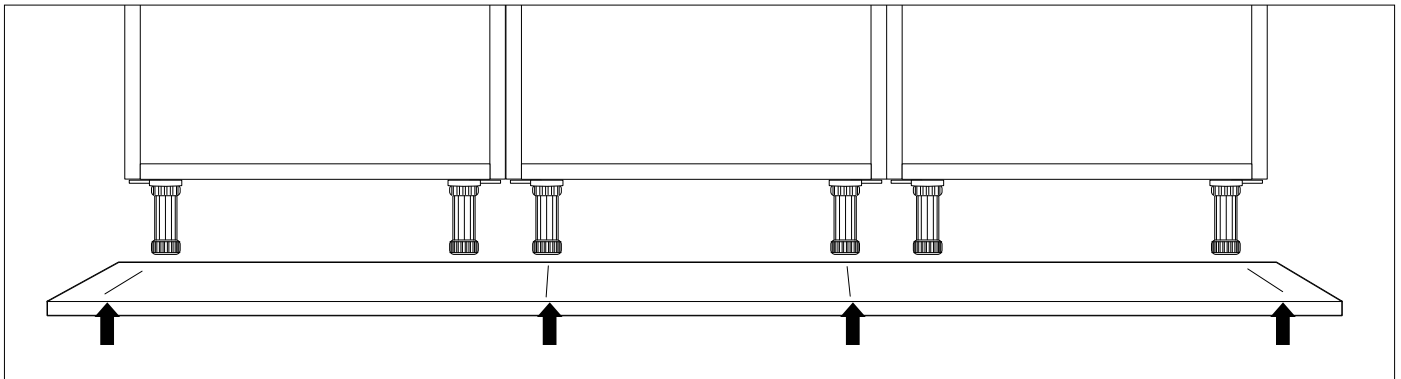

2. Center the clip in the middle of the toe kick panel, secure with the supplied attachment screws.
3. Align the toe kick panel and push the clips onto the legs.

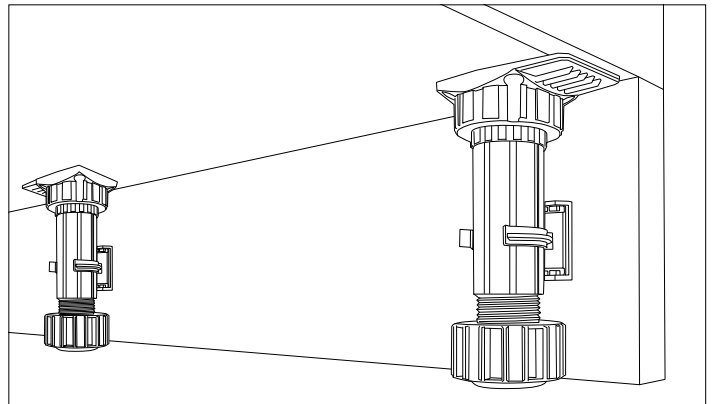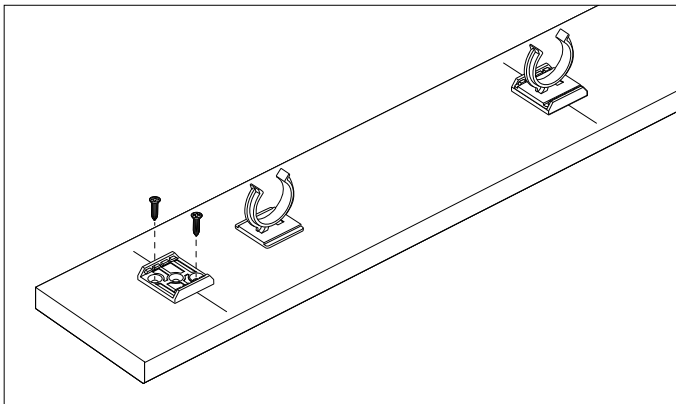


If applying toe kick around corners, adjacent panels will clip to the same corner leg. Be sure to stagger the clip heights so they overlay properly.

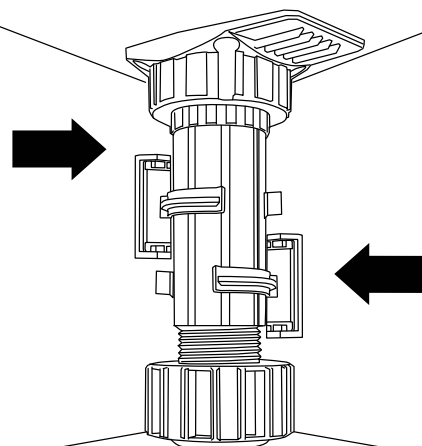


STAINLESS STEEL LEVELING LEG ASSEMBLY

Simple assembly is required for each leveling leg.


For easier handling and to avoid damage remove doors and drawers from the cabinet. Then, using two or more people, place the cabinet upside down on a protected surface.

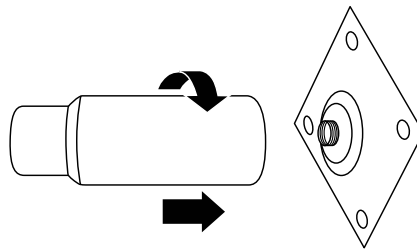


1. Place the two front leg brackets $3\frac{1}{2}$ " from the front edge with the support plate overlapping the end panel flush to the edge.

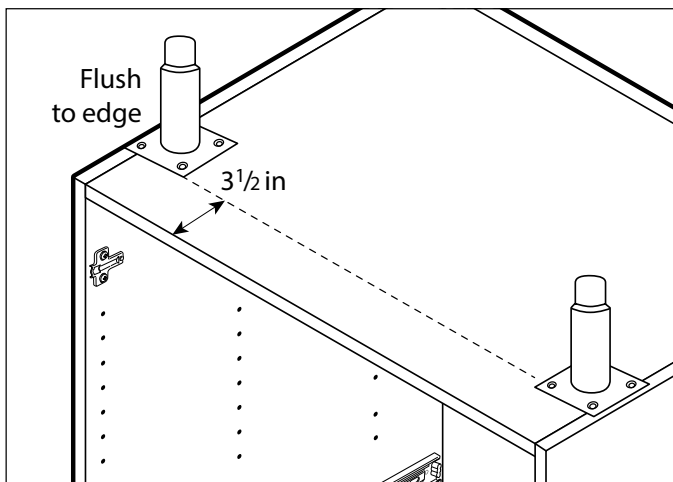



2. Place the two back leg brackets flush with back and side panels

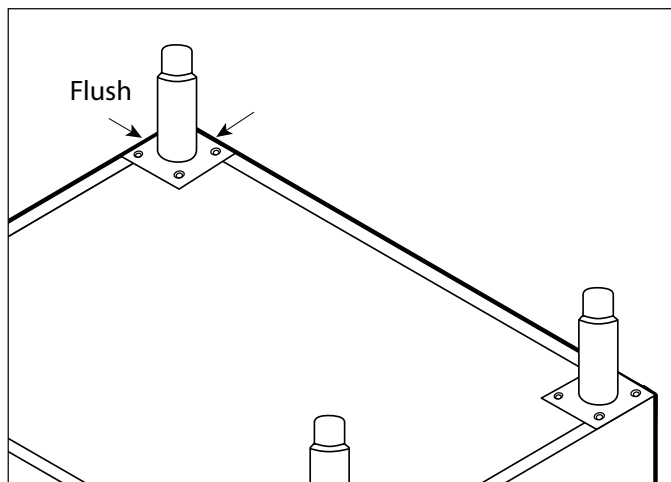


3. Use a #2 Phillips bit to attach the legs using the supplied stainless steel screws. DO NOT OVERTIGHTEN!

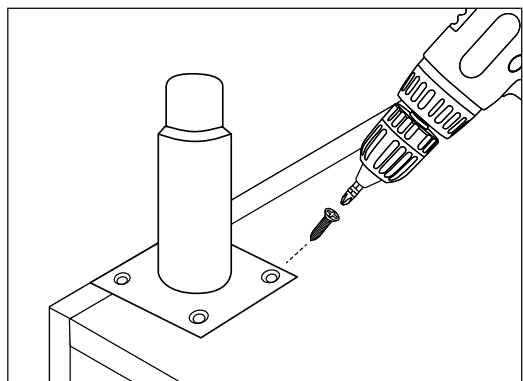



4. Adjust the leveling legs up or down to bring the cabinet to a level plumb position.

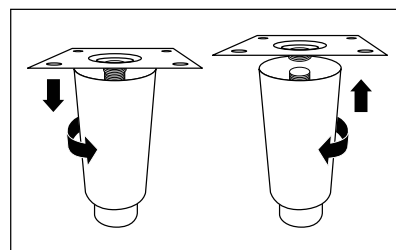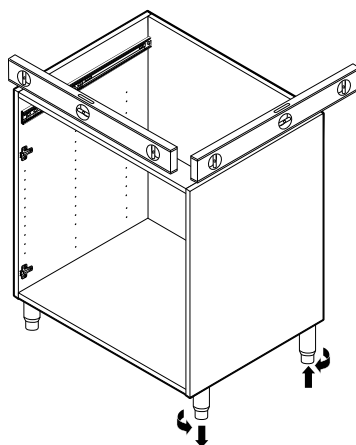


1. Lay the trimmed toe kick panel in front of the cabinet against the leveling legs. Mark the location of each leg on the back of the toe kick panel. Clips are not needed on all leg locations, but enough for a secure hold.

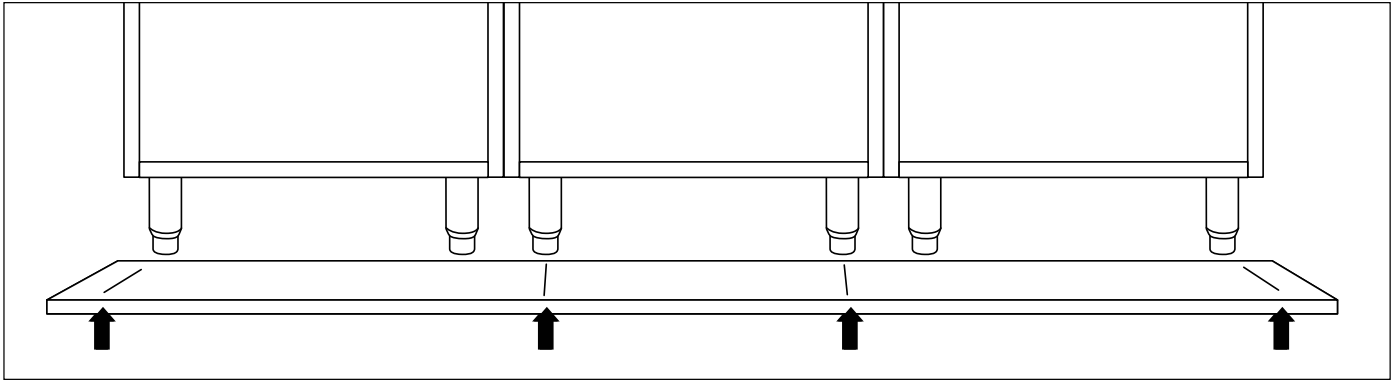

2. Center the clip in the middle of the toe kick panel, secure with the supplied attachment screws.
3. Align the toe kick panel and push the clips onto the legs.

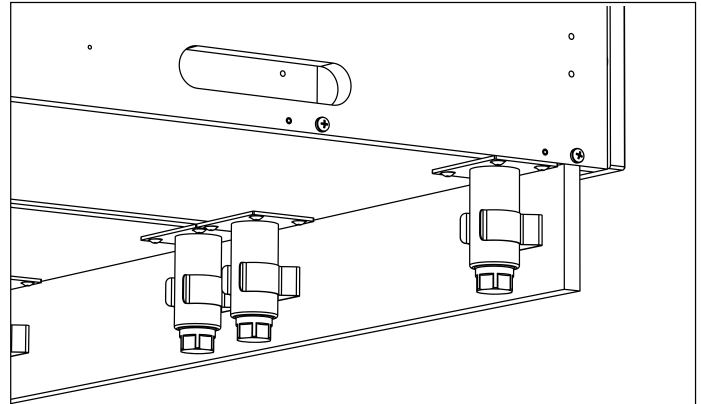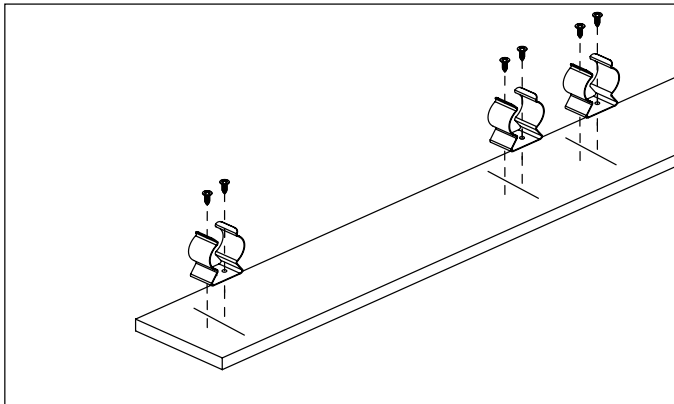

If applying toe kick around corners, adjacent panels will clip to the same corner leg. Be sure to stagger the clip heights so they overlay properly.

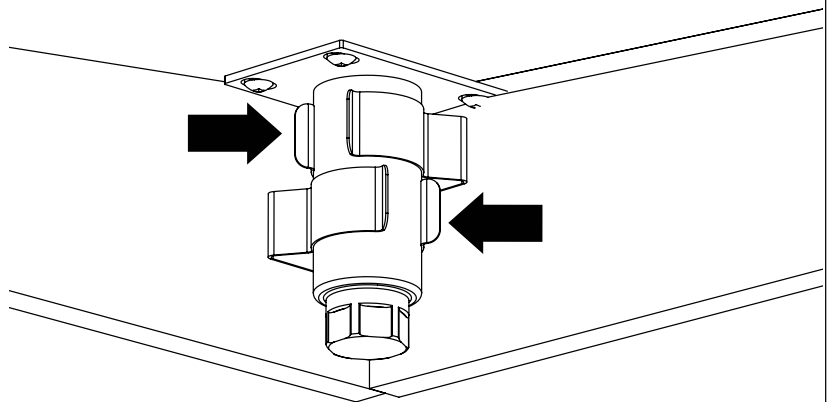

REQUIRED TOOLS

- Level
- Plastic Shims (for leveling if necessary)
- Drill
- Tapcon® $\frac{3}{16}$ " x $2\frac{3}{4}$ " Stainless Steel Screws
- $\frac{1}{4}$ " Stainless Steel Washers
- Tapcon® $\frac{3}{16}$ " Drill Bit (drill pilot holes in concrete - typically provided with screws)
- $\frac{3}{16}$ " Wood Drill Bit (drill pilot holes in cabinet backs or installation rails)
- $\frac{1}{8}$ " Wood Drill Bit (drill pilot holes in cabinet sides to join them together)
- Phillips Head Screwdriver
- Clamps (with rubber pads)
- Saw (circular or table) - to trim matching end panels and toe kick fillers
- Carpenter's Square
- Tape Measure
- Extension Cord
- Step Ladder (at least 6' if installing wall cabinets)

BEFORE YOU BEGIN:

Check your new cabinetry against your design plan to ensure that you have all required cabinets, moldings, fillers, and accessories to complete the installation.

SAFETY FIRST:

To avoid injury, explosion, or shock, make sure that all water supplies, gas supplies, and pertinent circuit breakers are shut off. Double check electrical using circuit tester to confirm power is off. If you are uncertain that utilities have been properly shut off, consult your utility company or service professional.

CAUTION:

It is essential that you use the recommended screws for your cabinetry installation. Under no circumstances should you use nails or drywall screws as they do not have the strength or holding power to ensure that cabinets stay on the wall. Failure to use specified screws will render warranty null and void.


Installation detailed in this manual is for concrete block construction only. Attachment to any other wall types will require locating the wood or steel studs behind the wall. Consult with your local home center, hardware store or installation specialist for recommended fasteners.

LEVELING THE CABINETS

Leveling the cabinets is the most important part of installation, to ensure doors align properly and countertop sets evenly. They are to be level and square. Make sure your leveling legs are installed and adjusted. Review separate leveling leg instructions.

Be sure to level your cabinets in all three directions:


1. Front to Back
2. Vertically
3. Horizontally

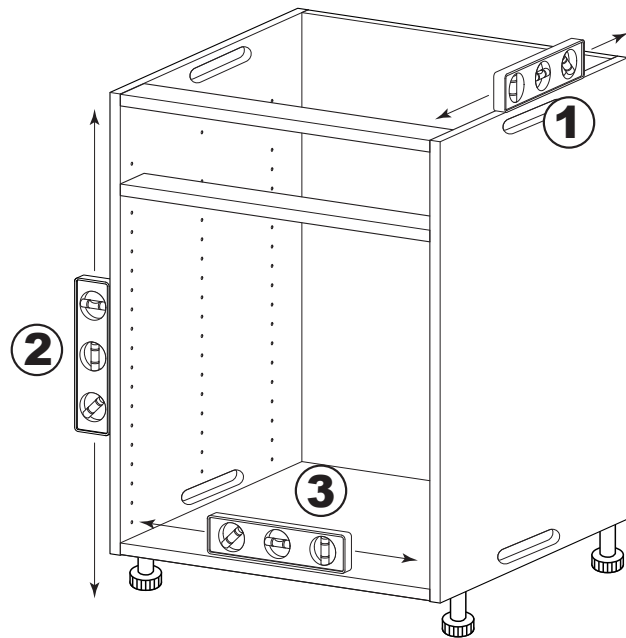


ANCHORING TO CONCRETE BLOCK WALLS

Prior to installation you will find it easier to handle the cabinet with the doors and drawers removed.

Hinges can be removed from the hinge plate by simply pressing in the release button on the end of the hinge, and pulling away from the cabinet. They are re-attached by hooking the hinge to the plate and snapping the pressure release into place.


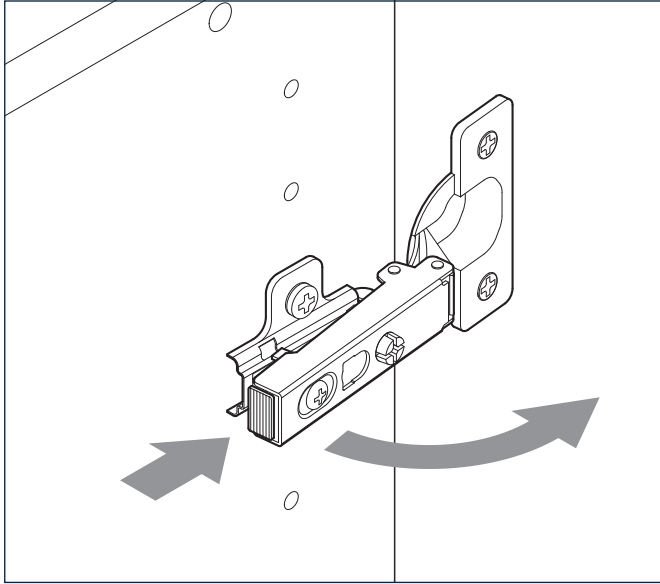


Pull the drawer out until it stops. Each drawer runner has a small plastic release tab. One tab will point up and the other will point down. Holding the drawer box on each side, push the tabs in the opposite direction from which they're pointing and carefully pull the drawer box out. Carefully push the runners back into the cabinet.

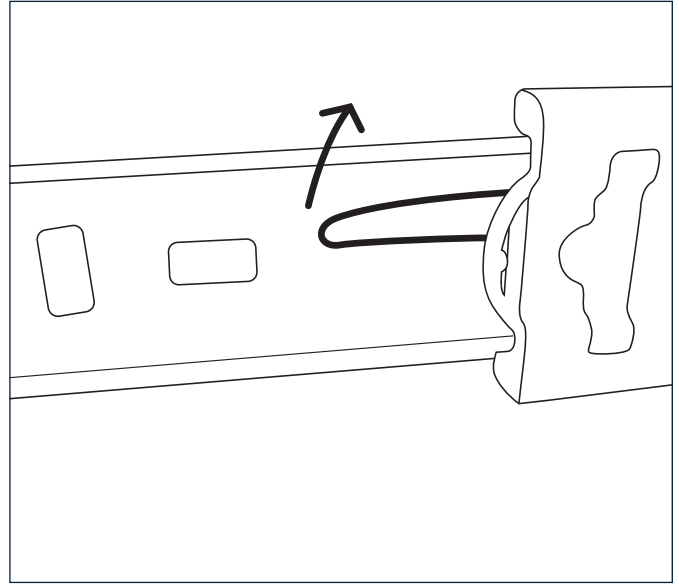

ANCHORING TO CONCRETE BLOCK WALLS


1. Each Wall Cabinet requires 4 wall anchors (2 top, 2 bottom).
2. Screws should be placed in each corner approximately 2" from the end panels.
3. Pre-drill the pilot holes before you place the cabinet against the wall with a standard $\frac{3}{16}$ " drill bit.
4. Then put the cabinet in place. In each corner use the $\frac{3}{16}$ " Tapcon® bit through the pilot holes to create starter holes into the concrete block, for the Tapcon® anchors.
5. Remove the cabinet to complete drilling the pilot holes into the concrete block. When complete, place the cabinet against the wall.
6. Once you confirm the cabinet is level and square, use Tapcon® 410 Stainless Steel $\frac{3}{16}$ " x $2\frac{3}{4}$ " fasteners, with a $\frac{1}{4}$ " stainless steel washer to secure the cabinet to the wall.

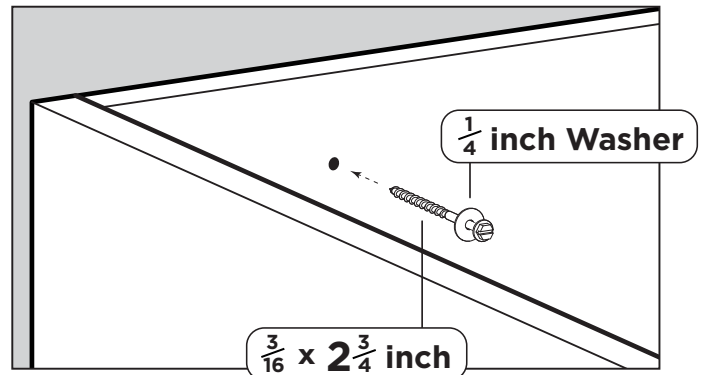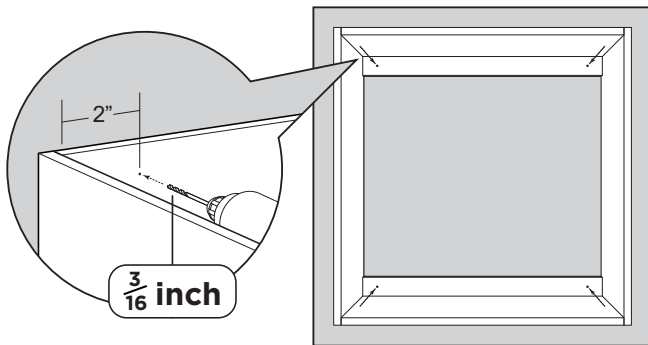

FASTENING CABINETS TOGETHER

As you install your Base and Wall cabinets, you should fasten the cabinets together along the front edge. This will help reduce gaps between cabinets and maintain alignment.

1. To secure cabinets together, a 1 1/4" stainless steel screw is used. (Model #WSSS1.25-Screw Kit) Pre-drill a 1/8" pilot hole in one end panel. Try to locate the joining screws where they will not be visible, above the drawer runner or behind the hinge plate.
2. Use clamps to hold cabinet panel in alignment. Insert the screw through the pilot hole into the second cabinet end panel – be careful not to countersink the head.

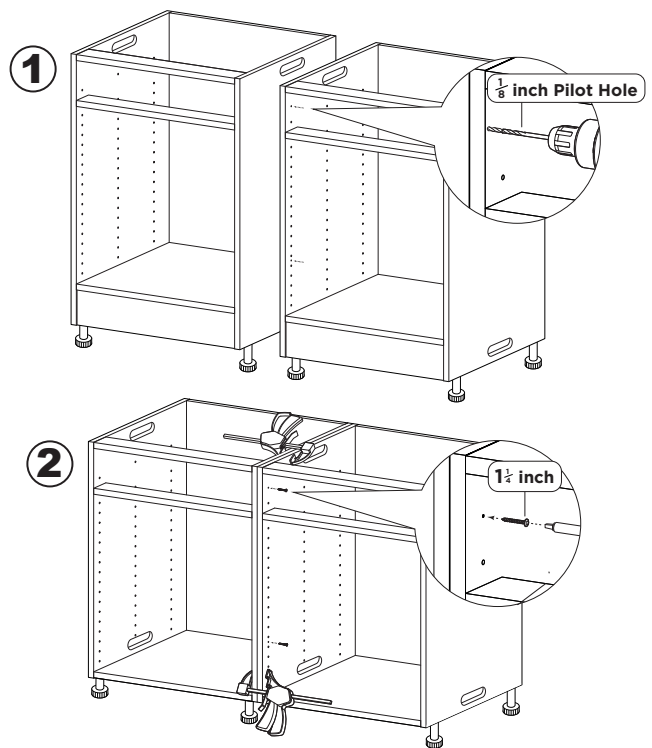




ADJUSTING DOOR ALIGNMENT

Door Alignment

1. WeatherStrong® Cabinets feature a 6-way adjustable hinge that will allow you to adjust and align all the doors after installation.
2. The center screw will adjust the door from side to side.
3. The top and bottom screws in the hinge plate will allow adjustment up and down.
4. The back screw will adjust the door in and out.
5. Please Note: These are soft-close hinges and will close slower at first.

To Reinstall the Drawers

1. Extend both drawer runners all the way out of the cabinet box.
2. Carefully reengage the metal drawer box profiles on both sides.
3. Once both profiles are engaged about 1" carefully push the drawer all the way into the cabinet.

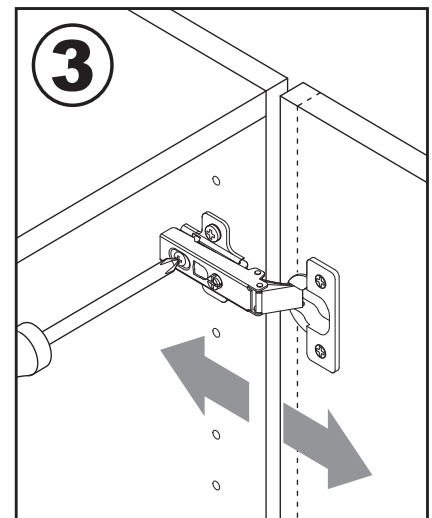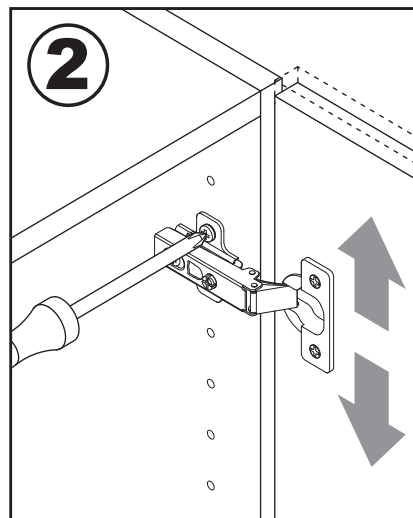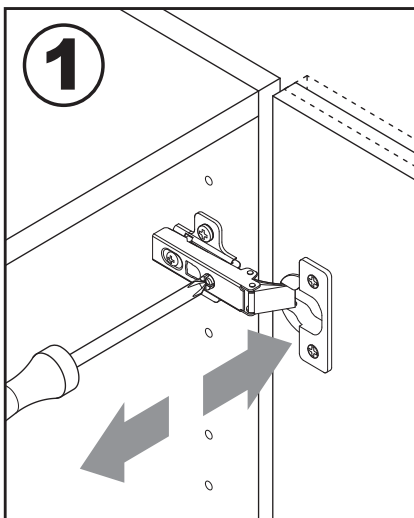

BAR RISER KIT

If your design includes a Bar Riser Kit (BRK), the information below will help you to install it.

We recommend installing the cabinet legs after you have attached the bar riser to the base cabinet.

1. Lay out the cabinets that make up your kitchen and locate where the bar riser kits are going to be placed.
2. Note: Some BRK's may overlap two cabinets, so follow your floorplan carefully.
3. Attach the BRK to the base cabinet(s) by lining up the bottom of the bar riser with the bottom of the cabinet.
4. Attach the bar riser using 1 $\frac{1}{4}$ " stainless steel screws (WSSS1.25-ScrewKit) by screwing from the inside of the cabinet through the rear hanging rails.
5. Once the BRK is attached, you can install the adjustable legs and level the cabinet/riser.


Bar Riser Kits

- $\frac{3}{4}$ " All-Weatherboard® composite material cabinet construction
- 4" deep by 36" high
- Requires BTP for field installation to match the cabinet doors

Bar Risers are 4" deep by 36" high and are available in 3" width increments from 12" to 48". When securely attached to the back of a 34 $\frac{1}{2}$ " high base cabinet, the top of the riser will be approximately

40 $\frac{1}{2}$ " from the floor. These field installed kits feature a full-height $\frac{3}{4}$ " thick enclosed All-Weatherboard® composite material back panel and can only be paired with the Island Back base cabinets. These kits will turn almost any base cabinet into a two-level bar.

Please Note: Exposed cabinet sides and backs MUST be covered by a matching end/island panel.

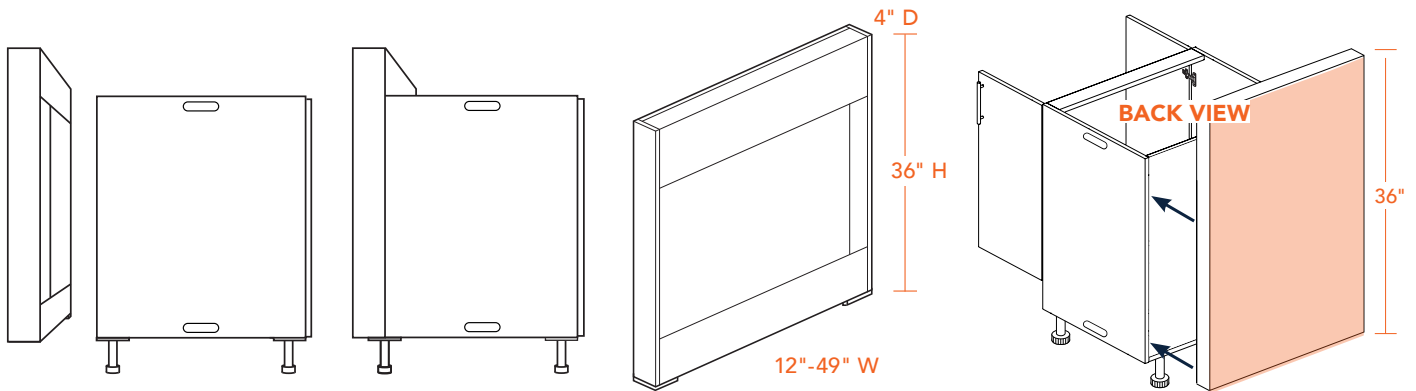

GRILL BASES AND SIDE BURNER CABINETS

Grill Bases and Side Burner Cabinets have a few extra steps that make up the proper installation.

First and foremost, if you are installing a drop-in grill or side burner in your cabinets, you **MUST** first install an insulated jacket before inserting the heat admitting appliance. This protects your cabinets from the extreme heat and protects your limited lifetime warranty.

Please Note: You must purchase the insulated jacket from the manufacturer of the gas/heat appliance. Please follow the manufacturer's instructions on how to properly support your appliance and insulated jacket inside the cabinet.

Cabinet Modification:

1. Your grill base or side burner cabinet comes with two panels in the upper, apron part of the cabinet.
2. Mark the required cut-out necessary to install the insulated jacket and the gas appliance. Refer to the specification and installation guides supplied by the appliance manufacturer, or use a template if provided. Remember to account for the countertop thickness.
3. Carefully cut out the required space on the cabinet apron and decorative overlay panel.
4. Place the insulated jacket into the cutout to ensure a proper fit.
5. Fabricate a support brace, inside the cabinet, based on the appliance manufacturer's recommendation.
6. We recommend hiring a licensed professional to install the gas appliances and the insulated jacket.



Grill Double Door Base

- The face plate is modified in field to accept the respective insulated jacket used with the gas grill
- $\frac{3}{4}$ " All-Weatherboard® composite material cabinet construction
- Fully integrated back panel
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Available in all door styles and finishes
- Stainless steel handles sold separately see page 42 for details

Please Note: All built-in grill heads require an insulated jacket. Please consult your grill manufacturer for the appropriate model.

Proper Venting:

All Base Cabinets have precut vent cutouts in the cabinet sides. These provide airflow through the cabinetry and enable any excess gas to vent out the end of the run. Matching Base End Panels are available with decorative vent grills see page 36.

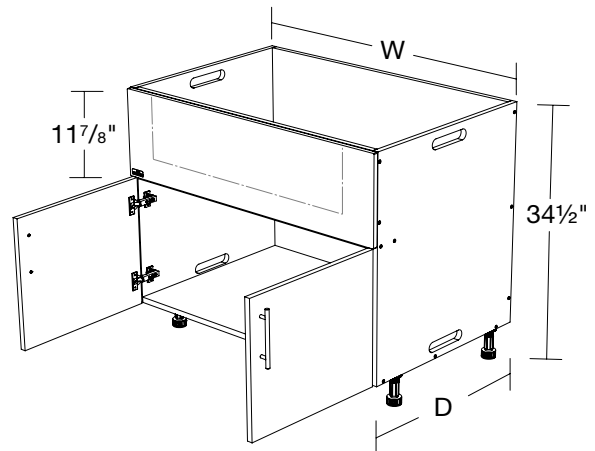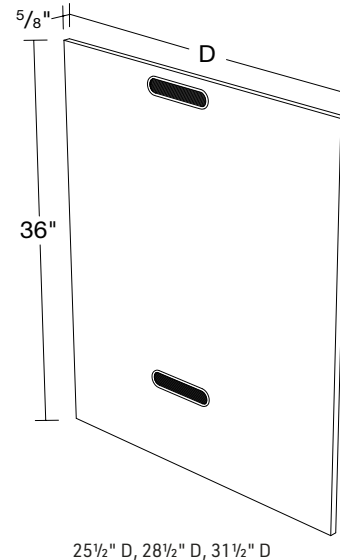

MATCHING ENDS AND ISLAND BACK PANELS

Matching End Panels and Island Back Panels are used to cover any exposed cabinet sides or backs. These panels are manufactured from the same HDPE material as the cabinet doors and drawer fronts.

Matching End Panels are oversized and will not match the exact measurements of your cabinets. This allows them to be trimmed to follow the pitch of the floor of your outdoor space, which is often sloped. Trimming HDPE will not leave a raw edge as the material color is through and through.


Matching Panels should be trimmed to fit after the cabinets are permanently set and leveled.

Panel Installation:

1. Refer to your floorplan or cabinet layout to determine which panels go in which location.
2. Measure each panel location from front to back and top to bottom. Use these measurements to mark your panel.
3. Once the panel is marked, use a table saw or circular saw to trim the panel to size.
4. Use C-clamps or Quick-Grips to hold the panel in place during installation.
 - a. Screws (WSSS1.25-Screw kit) can be used to secure the panels to the cabinets.
 - b. If using Screws make sure to drill pilot holes into the cabinet before placing the permanent screw.

5. Attach the panel by screwing the panel from inside the cabinet box.

Please Note: Panels that will cover the side of a cabinet with a Bar Riser Kit attached will need to have the profile of the side of the cabinet combination cut out.

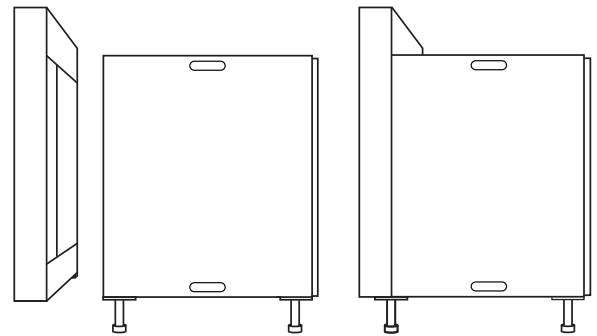




INSTALLING HARDWARE:

Hardware is the final step of your cabinet installation. This is done after the drawers are back in place and the doors have been replaced and adjusted to be square.

Placement of your hardware is per your choice and a template can be purchased from your local hardware store.

Install:

1. Mark your doors/drawer fronts with a pencil or small marker where the screw holes will go.
2. Make sure to carefully measure where these holes will be drilled to ensure proper placement.
3. Drill the screw holes using the 3/16" drill bit.
4. Attach the hardware using the screws provided in the hardware bag, from the inside of the door/drawer out into the piece of hardware.

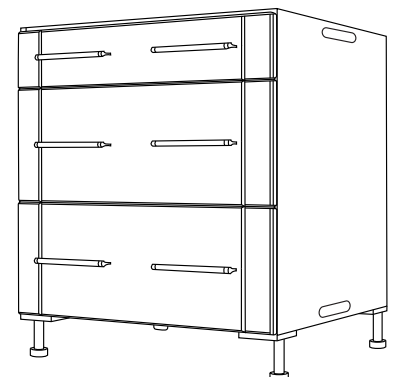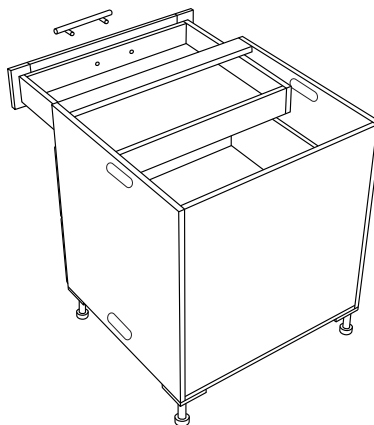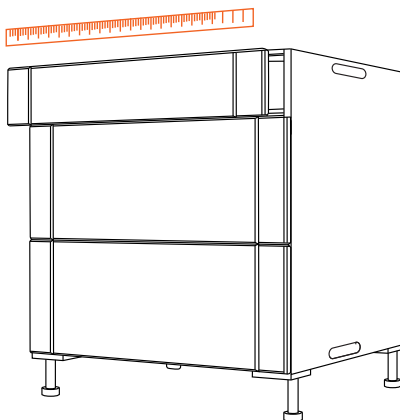

AFTER INSTALLATION CARE

After your cabinets have been installed, wipe down all exteriors with a damp cloth to remove dust.

Clean Up: Wash WeatherStrong® with water and a soft cloth or sponge. A mild dishwashing liquid can be used if needed. For tougher to clean spots, wash with Simply Green All-Purpose Household Cleaner. A soft bristle brush may be used if needed.

Everyday Care

Salt Water Environments: Oceanfront environments with salt air and sea spray will require regular maintenance and cleaning to prevent rust from forming on the handles, hinges and drawer runners. Clean stainless steel surfaces several times a month to keep the chemical reaction, from the salt, from gaining a foothold on the hardware. With regular cleaning, your cabinets will look like new for many years. To achieve maximum corrosion and stain resistance, the surface of the stainless steel must be kept clean.

Never use abrasive cleaners, scouring pads or powdered cleansers.

Hardware Care

Use mild soap and warm water to clean door, drawer knobs and pulls. Thoroughly dry hardware surfaces after cleaning. Do not use silver or brass polish.

Grill & Side Burner Cabinet Modifications

Grill and side burner cabinets are manufactured with two full upper face plates that will need to be field modified to accept the respective insulated jacket used with the gas grill or side burner.

The second matching panel will be shipped loose for ease of modification and installation. It can be attached with stainless steel screws or a suitable construction grade adhesive. Under no circumstance should a grill or side burner be installed without the appropriate insulated jacket specified by the manufacturer of the appliance.

Heat Appliances

Free-standing grills with adequate space from direct heat are recommended or grills with insulated jacket specified by the grill manufacturer can be installed in WeatherStrong® cabinets.

Insulated jackets are required for heat admitting appliances being installed in WeatherStrong®.

Light Exposure

Cabinet sides and backs that will be exposed to direct sunlight and other weather elements must be covered by a matching end panel in coordinating High-Density Polyethylene (HDPE). Failure to install these protective panels will void the cabinet warranty.

DRAWER REMOVAL



Step 1

Fully open drawer and remove contents.



Step 4

To re-install, align drawer slides and gently push drawer closed. Locking tabs do not need to be pressed.



Step 2

With drawer fully extended, locate slide release tab on left side and push up to release.



Step 5

Open and close drawer several times to ensure proper alignment.




Step 3

Locate release tab on right side and push down to release. Pull drawer forward to remove.

ROLL-OUT TRAY RELOCATION/INSTALLATION


Step 1

Install two spacers on each end panel just above the lower hinge. Use two Euro screws per spacer. If applicable, repeat step 1 to install an additional upper roll-out tray above the middle hinge.

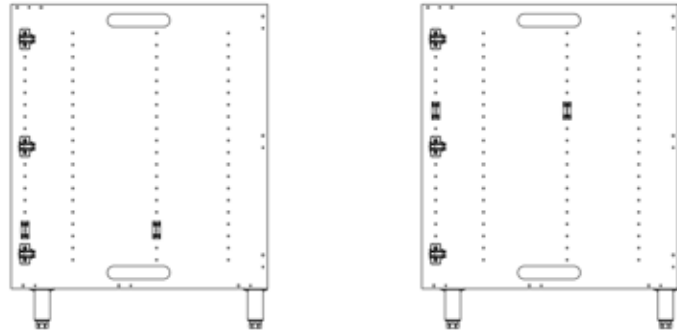


Step 2

Remove drawer runner from packaging and extend the runners. While pressing down on the white tab pull smaller runner Member (A) apart from larger runner Member (B).

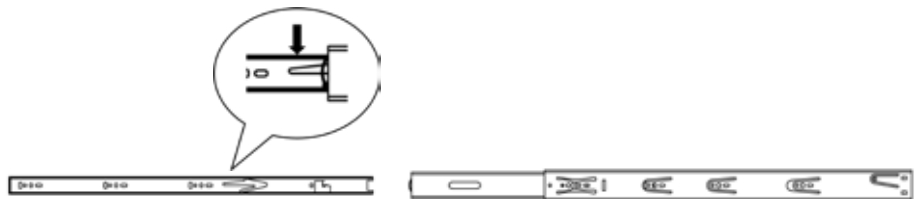


Step 3

Attach the larger runner Member (B) to the spacers using two Euro screws per runner. Attach the smaller runner Member (A) to the sides of the roll-out tray using two Euro screws. To access the attachment holes, you will need to extend the runner mechanism.

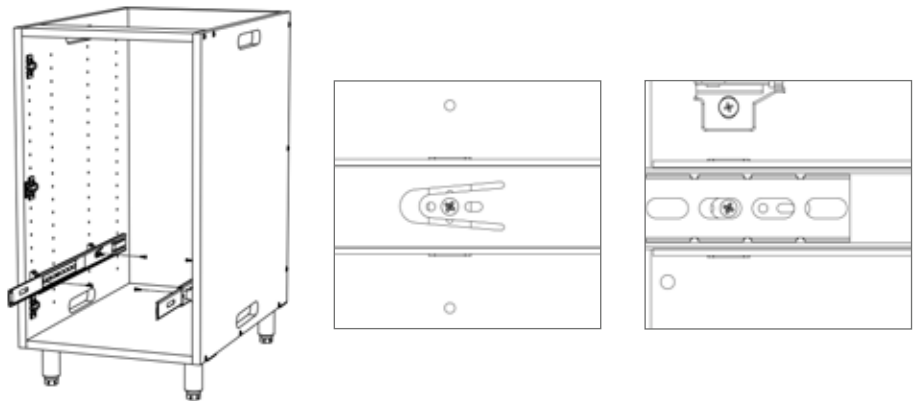


Step 4

Carefully slide the roll-out tray into the larger runner Members (B) by inserting the smaller Members (A) into the plastic guides at the front of the larger Members. You should hear a 'click' when fully inserted.

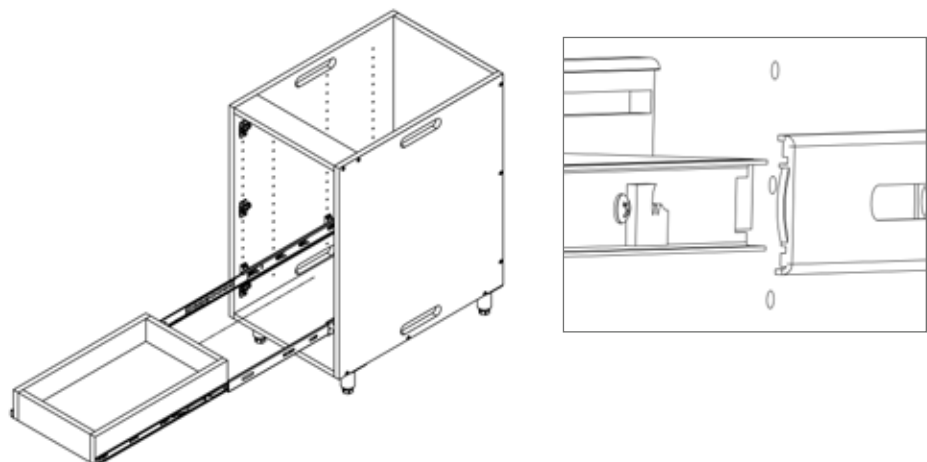

DOOR POSITION ADJUSTMENT

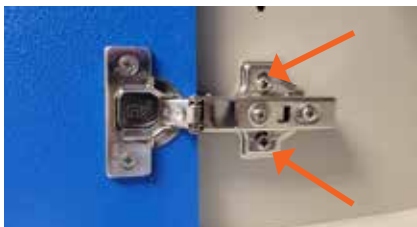**Height**


Loosen two screws and adjust door to desired position. Re-tighten all screws.

**Side to Side**


Using a Phillips screwdriver, rotate front screw to move the door to the desired position.

**Depth**


Using a Phillips screwdriver, rotate back screw to move the door to the desired position.

**Height**

For vertical door adjustment loosen center screw on each hinge. Set door at desired height. Re-tighten each screw.

**Side to Side**


Rotate front screw for horizontal door adjustment

**Depth**

Rotate back screw for front to back door adjustment

**SHELF RESTS**

Adjustable shelves are supported by sturdy, clear polymer shelf rests.

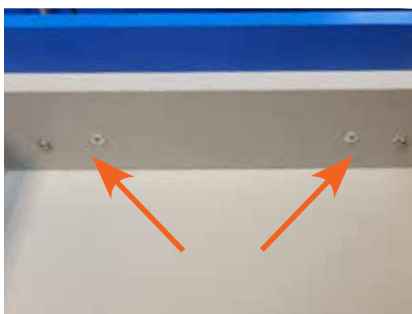**DRAWER FRONT ADJUSTMENT**

If additional adjustment is required, loosen screws and twist drawer front for proper alignment. Tighten screws securely.

LIMITED WARRANTY

Thank you for your purchase. We aim to deliver exceptional quality and personalized service. To view our warranty and registration policy on your mobile phone scan the QR Code using your camera application. (For Android devices, use Google Lens)

WEATHERSTRONG® OUTDOOR CABINETRY WARRANTY



JUPITER WARRANTY



Lined area for notes.



888.745.0004 | weatherstrong.com