


DATASHEET

VS292-3.1A / VS292-20W

White 13A 2G DP USB socket Type A+C

www.thrion.co.uk

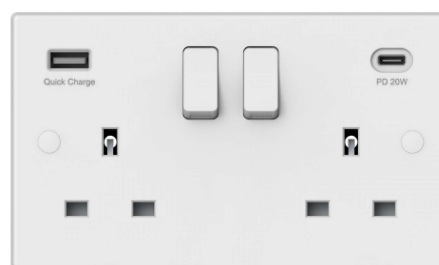

PART CODE	VS292-3.1A		VS292-20W	
DESCRIPTION	2Gang 13A DP Switched USB Socket (Type A+C)3100mA (Total)		2Gang 13A DP Switched USB Socket (Type A+C) Quick Charge Max20W	
CHARACTERISTICS OF THE USB	Type A only : 5V 3.1A Type C Only: 5V 3.1A Type A+C : 5V 3.1A Total Max Power : 15.5W		Type A : 5V 3A / 9V 2A / 12V 1.5A Type C : 5V 3A / 9V 2.22A / 12V 1.67A Type A+C : 5V 3A Total Max Power : 20W	
	Short-Circuit Protection Overload Protection		Quick Charge(20W) Low Power Standby	
FINISH	White			
MINIMUM MOUNTING DEPTH (MM)	25			
DIMENSIONS (MM)	Height: 86	Width: 86	Plate Thickness: 10	
INPUT VOLTAGE	Mains 250V a.c.			
MAXIMUM LOAD (A)	13			
TERMINAL CAPACITY	3 x 2.5mm ² or 3 x 4mm ² or 2 x 6mm ²			
IP RATING	IP 20			
WARRANTY	3 years			
DECLARATION OF CONFORMITY (HELD ON FILE)	Yes			
MANUFACTURED IN ACCORDANCE WITH	BS 1363-2			