




Dart flyscreen fitting instructions KAWASAKI Z900 (2018 on)

Thank you for purchasing a Dart flyscreen. It has been carefully designed and manufactured to suit a specific motorcycle model and by following these instructions you should encounter no problems with fitting. The kit should comprise the following:

- 1 x polycarbonate screen
- 4 x EPDM rubber grommets
- 1 x left hand mounting bracket
- 1 x right hand mounting bracket
- 2 x M8 x 45mm stainless cap head screws
- 2 x 18mm x 6mm stainless steel bushes
- 4 x stainless hex head machine screws
- 4 x washers

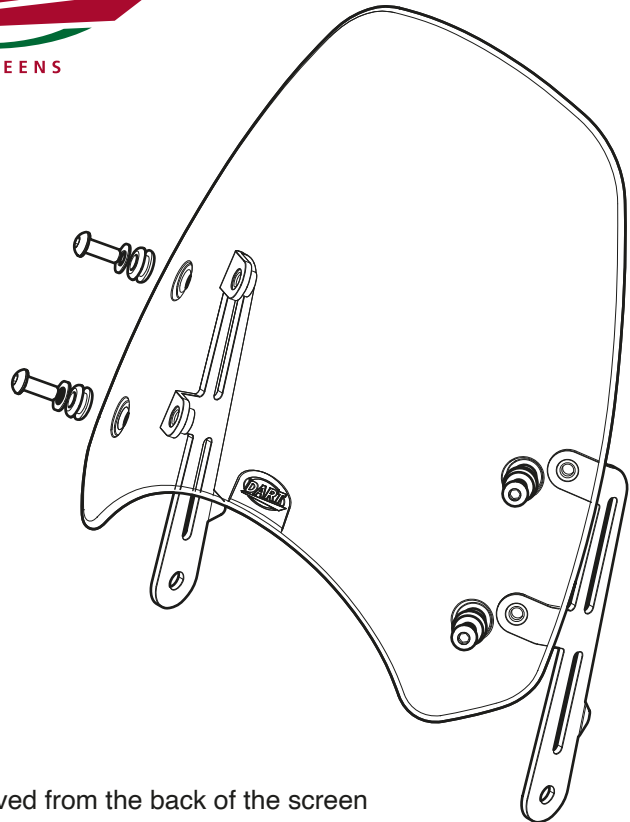

- 1 Fit the grommets to the screen - this is best achieved from the back of the screen blade.
- 2 Using a Phillips screwdriver, remove the headlamp bezel. Now remove the four screws holding the light unit to the bowl. It will be retained by the adjustment mechanism.
- 3 You should now be able to remove the right hand headlight bracket bolt by unscrewing the nut from the inside.
- 4 Fit the supplied M8 x 45 bolt through the right hand screen mounting bracket and then the stainless bush, before fitting it in the headlight bracket. The bush should sit between the screen bracket and the headlight bracket. Ensure that the triangular step at the back of the screen mounting bracket is resting fully on the headlamp bracket before tightening the nut on the inside of the headlight bowl.
- 5 Repeat operation for left hand side, then refit the four screws to secure the headlight. The headlight bezel can now be refitted.
- 6 With both brackets now fixed, hold the screen blade in position and loosely fit the bottom two hexagon head machine screws with their washers, ensuring that they engage in the captive nuts on the brackets. Do not tighten these yet.
- 7 Fit the top two machine screws. Once everything is in position, gradually tighten all the screws evenly until they are seated on the brackets.
- 8 Double check that everything is sufficiently tight and if so, fitting is now complete!

MAINTENANCE: No special maintenance is required. Do not use solvents to clean - just warm soapy water. Many proprietary glass cleaners are suitable for polycarbonate - check the label before trying.

IMPORTANT NOTICE: Whilst the screen provides a good level of impact protection, it is not warranted unbreakable. It is NOT a substitute for eye protection, which should be worn at all times while riding.