Stainless Steel Multi-Jet Water Meters with Pulse Output



Stainless Steel Water Meters for indicating flow totalization of water with pulse output. Stainless Steel offers additional corrosion resistance when totalizing liquids with corrosive or chemical elements. Designed for long service life and maintenance-free operation, even under harsh conditions.

Features:

- Pulse Output Components
- All Meters have Hydrocarbon Resistant Seals and will not be damaged by dissolved amounts of free product
- Sealed Dry Dial for Clear Readings
- Internal Strainer to Protect Meter from Particulate Damage

Specifications:

· Class: B

Accuracy: Transitional Flow: ± 5%

Nominal Flow: ± 2%

Maximum Water Temperature: 104°F

Maximum Water Pressure: 150 psi

Mounting Orientation:
1/2" and 3/4" Horizontal or Vertical
1" to 2" Horizontal Mounting

Materials:


Body: 304 Stainless Steel, polyethylene


Couplings: 304 Stainless Steel

Measuring Chamber: Polyethylene

Seal: Viton, HDPE

Not NSF certified

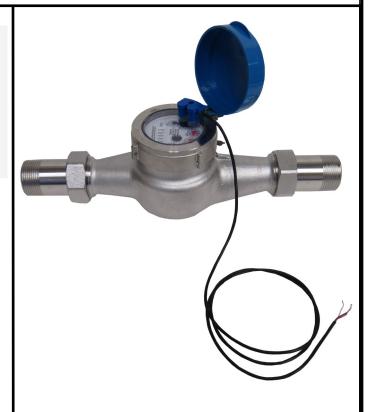

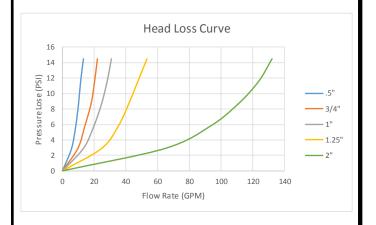

PRM Part Number: Description


WM050SSPVX— 1/2" NPT multi-jet water meter WM075SSPVX— 3/4" NPT multi-jet water meter WM100SSPVX— 1" NPT multi-jet water meter WM125SSPVX— 1-1/4" NPT multi-jet water meter WM200SSPVX—2" NPT multi-jet water meter WMFL200SSPVX— 2" Flanged SS water meter

(888-TREAT-IT) • www.prmfiltration.com • sales@prmfiltration.com

Stainless Steel Water Meters with Pulse Output









Factory Set Pulse Rates:

WM050SSPVX: 1 pulse per gallon WM075SSPVX: 1 pulse per gallon WM100SSPVX: 1 pulse per 10 gallons WM125SSPVX: 1 pulse per 10 gallons WM150SSPVX: 1 pulse per 10 gallons WM200SSPVX: 1 pulse per 10 gallons

						Max. Flow	Nom. Flow Range
Part #	Size	Length	Length with NPT adapters	Height	Weight	Gallons Per Minute	
WM050SSPVX	1/2" NPT	7"	10.5"	4.75"	3 lbs.	10	1-10
WM075SSPVX	3/4" NPT	8"	12"	4.75"	3.5 lbs.	20	1-20
WM100SSPVX	1" NPT	9"	13"	4.5"	5.5 lbs.	30	2-30
WM125SSPVX	1-1/4" NPT	9"	13"	5"	6 lbs.	50	3-50
WM200SSPVX	2" NPT	12"	18"	6.5"	15 lbs.	130	5-130
WM200FLSSPVX	2" FLANGE	10.5"	N/A	6.5"	25 lbs.	130	5-130

Information in this drawing is provided for reference only.

(888-TREAT-IT) • www.prmfiltration.com • sales@prmfiltration.com