


Thermotouch 4.3dC

5245 / 5246




Combined UFH and appliance controls

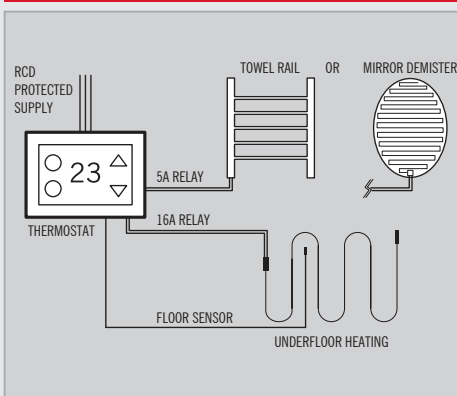

Unique dual controls

Thermotouch now has an additional 5A relay which can control an extra appliance such as an electric heated towel rail or mirror de-steamer. Thermotouch 4.3dC is compatible with the most popular floor sensor probes on the market making it suitable to upgrade your current thermostat.

5 Reasons for Thermotouch 4.3dC

-  Dual floor heating and appliance controls
-  Compatible with popular sensor probes
-  Portrait and landscape screen modes
-  Energy saving preset heating modes
-  Available in Satin Black and Ice White

Portrait and landscape modes

Thermotouch 4.3dC can be adjusted to portrait or landscape modes for flexible installation.

The underfloor heating and towel rail controls can be used together or independently.

Up to £1 will be donated to one of our chosen charity partners for every Thermotouch 4.3dC sold in 2016!

www.thermogroupuk.com/charity

Technical Data

Primary relay (UFH)	16A (3600W)
Additional relay	5A (1125W)
Maximum combined load	20A (4500W)
Compatible sensors	6.8kΩ, 10kΩ, 12kΩ, 15kΩ, 33kΩ (@25°C)
Protection class	IP30
Warranty	3 years
Voltage	230V 50/60 Hz
Temperature range	5 ~ 35°C
Ambient	0 ~ 50°C
Accuracy	±0.5°C
Dimensions	W129 x H88 x D48mm (31mm in wall)