

Twin Thermal Carafe Automatic Coffee Brewer

IIEM#	
PROJECT	

DATE

Features

12 Cup Automatic Coffee Brewer

- Brews 15 gallons (56.8 liters) of perfect coffee per hour.
- Accepts thermal carafe up to 8.5" (21.6 cm) tall.
- Use in quick turn environment where high quality coffee is continuously refreshed.
- · All stainless steel construction.
- · Hot water faucet on all models.
- SplashGard® funnel deflects hot liquids away from the hand.
- · Pourover feature.



CWTF Twin-TC Shown with Thermal Carafes (thermal carafes sold separately) Dimensions: 17.2" H x 16" W x 22.5" D (43.7cm H x 41cm W x 57.2cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQ-17-TL Product No.: 30200.1000 Dimensions:

 $12\frac{7}{16}$ " H x $2\frac{1}{2}$ " W x 3" D 31.6 cm H x 6.35 cm W x 7.62 cm D



Thermal Carafe

Product No.: 18022.6002 Capacity 1.9 liter (64 oz) Dimensions: 8"H x 6.4"W x 8.2"D 20.3 cm H x 16.3 cm W x 21 cm D



Paper Filter Pack

Product No.: 20115.6000 Packed per case: 1,000

Dimensions: $4\frac{1}{4}$ " Base x $2\frac{3}{4}$ " Sidewall

10.8 cm Base x 6.98 cm Sidewall



Model	Agency Listing	International Model	Agency Listing
CWTF Twin-TC		No International Model	

Dimensions & Specifications






Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cu. ft³/m³	Weight lbs/kg	Cord Attached
CWTF Twin-TC	23400.6047	120/240	27.1	2x3000	6250	15 gal/56.8 liter	7.3/.21	64/29.0	NO

Includes a stainless steel funnel

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: Requires 3-wires plus ground service rated 240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

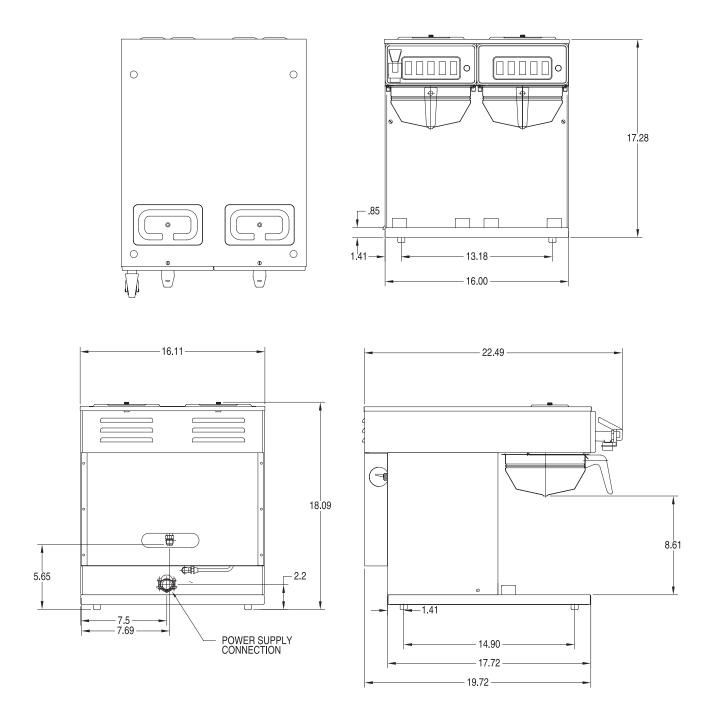

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com