


QUICK INSTALLATION GUIDE

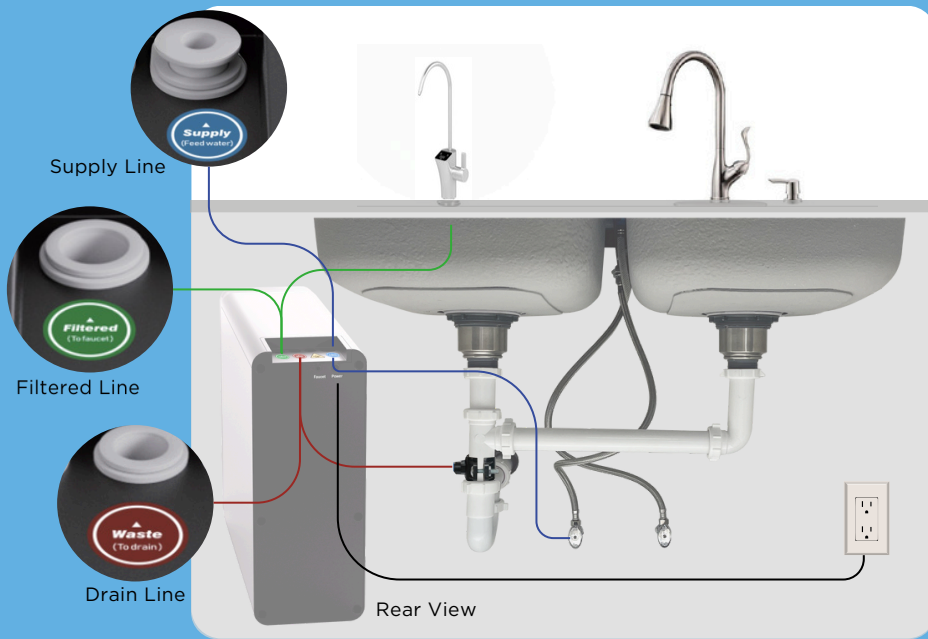

Warning: please read the instruction manual carefully before proceeding to use.

Read

Make sure your sink has a power socket. Do not use socket specially designed for garbage disposal.

Delivered

After completing installation turn on the water supply first, then connect the power supply.


Delivered

Step 1: Connect the 3/8" white tubing to the 3-way feed water valve

Cut the 3/8" tubing squarely and clearly.




Put one end into hot water to soften tubing.



Insert it to the valve and squeeze to the end.



Tighten with a wrench.



Step 2: Connect the 3-way feed water valve to the angle valve

Close the cold water supply valve, then detach the supply line from the valve.



Attach 3-way feed water valve to angle valve.



Reattach the cold water supply line to connected 3-way valve.



Remove the plug from the "Supply" port.



Insert tubing into the "Supply" port.



Step 3: Connect the 1/4" red tubing with check valve to the system

Disassemble the drain saddle, peel off sticker and stick to saddle valve.



Choose spot on drain pipe to install drain saddle.



Drill 1/4" hole into drain pipe, do not penetrate opposite side of the pipe.



Mount drain saddle, tighten the screws with screw driver.



Insert 1/4" red tubing to the drain saddle about 1.4", lock the fitting with a blue clip.



DRINK. GIVE. LIVE GENEROUSLY.

Step 4: Connect the 1/4" tubing from the drain saddle to the system (Waste)



Remove the plug from the "Waste" port.



Insert the tubing into the "Waste" port.


Step 5: Install the water faucet.

Load the rubber underneath and fasten the hand fixture.




Load the rubber and faucet to deck.

Use a 1/4"-3/8" water fitting to connect the filtered tubing and faucet tubing, then lock the clips.



Faucet Connector



Insert the power cord which is attached to the RO faucet into the "Faucet" connector at the back of the housing, and tighten nut.





Connect the other side of filtered tubing to the "Filtered" port on the system.

Step 6: Flush the system, installation complete



Turn on the cold water supply valve and feed water valve.

Connect the power supply.



Turn on water faucet to flush the system.

