




HYDRAULIC BUMP STOP KIT

INSTALL


RAM TRX (2021 - 2022)

Step 1:

Park vehicle on level ground, set the parking brake. Block the front tires front so the truck can't roll.

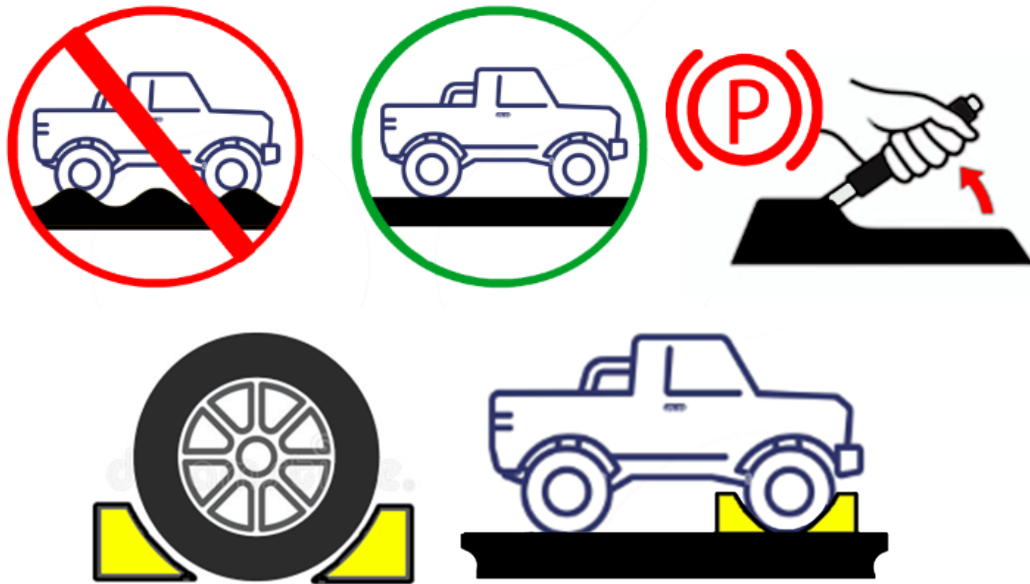

Lift the truck by the rear diff and set jack stands on the frame so the rear suspension is fully unloaded with the tires off the ground.

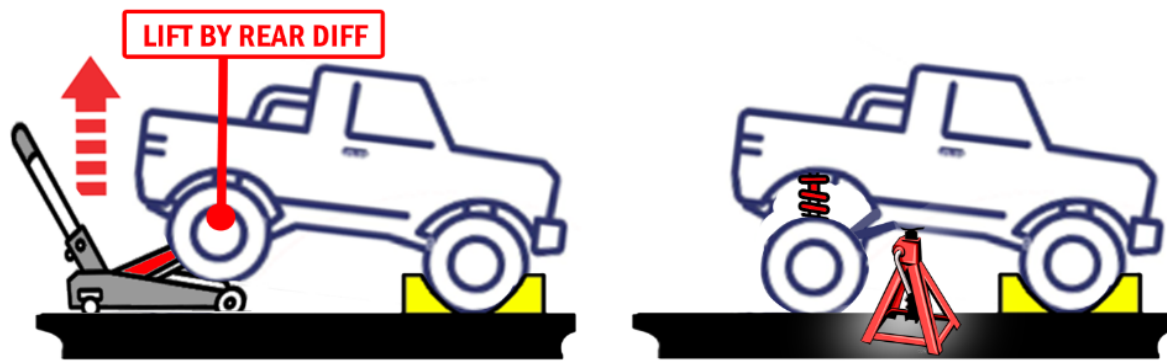



HYDRAULIC BUMP STOP KIT

INSTALL

RAM TRX (2021 - 2022)

Step 2

Remove the rear springs, this can be done by using a spring compressor, or, with the axle supported by a jack, remove the bottom shock bolt and then lower the axle to remove the spring.



Step 3

Unbolt the factory bump stop from the truck, it will not be reused.





HYDRAULIC BUMP STOP KIT

INSTALL

RAM TRX (2021 - 2022)

Step 4

With the spring removed, Take the rubber upper spring isolator and enlarged the hole for the bump stop, this is best done with a fresh razor blade.





HYDRAULIC BUMP STOP KIT

INSTALL

RAM TRX (2021 - 2022)

Step 5

Install your new bump stop with the supplied bolts.



If you are adding a rear spacer plate, now is the time to install that with the supplied bolts, it installs onto the new bump stop.

The bump stop will always be touching the upper spring mount first, not the spacers.






HYDRAULIC BUMP STOP KIT

INSTALL

RAM TRX (2021 - 2022)

Step 6

Reinstall the rear springs, making note of the indexing tab on the spring isolator to index into the bump stop plate or the spacer plate.

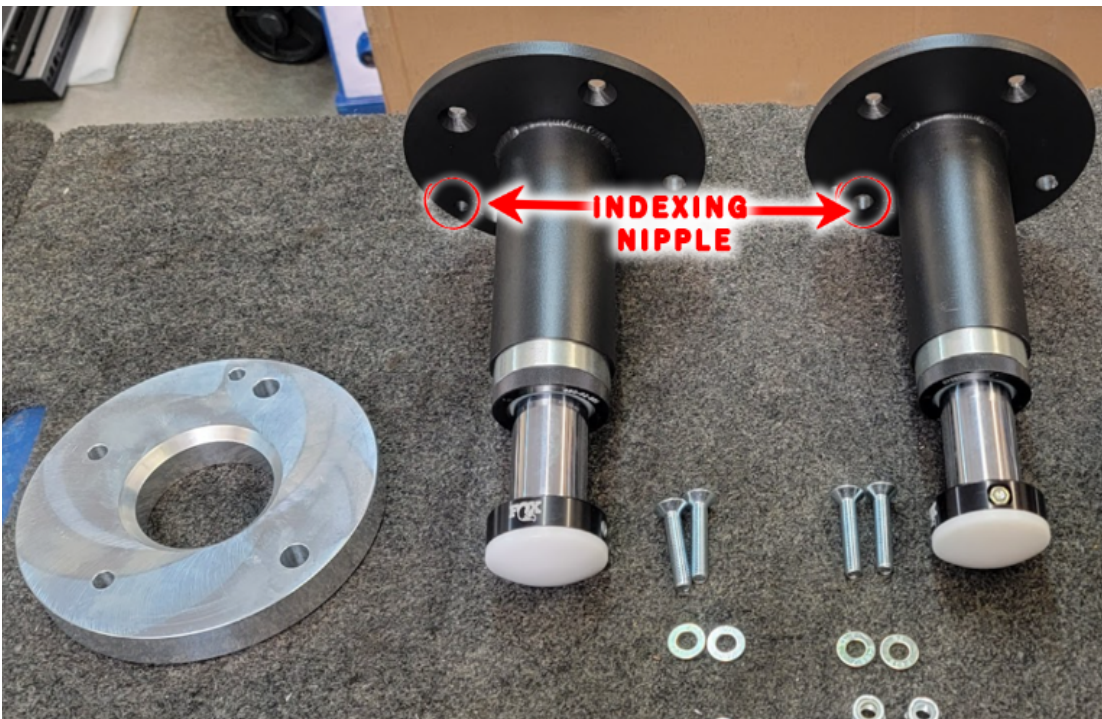



HYDRAULIC BUMP STOP KIT

INSTALL

RAM TRX (2021 - 2022)

Step 7

If the shock was disconnected, reconnect and repeat steps on the other side.

Step 8

Lower truck to the ground and enjoy your new rear bump stops