


SCHOOLHOUSE

Odyn 84" LED Ceiling Fan

Shown in Brushed Nickel with LED Light Kit

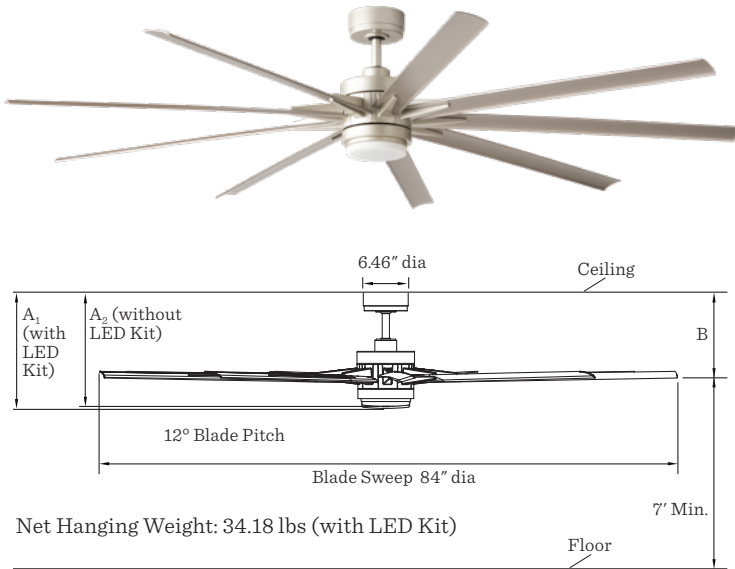

Net Hanging Weight: 34.18 lbs (with LED Kit)

| | A ₁ (With LED Kit) | A ₂ (Without LED Kit) | B |
|----------------------|-------------------------------|----------------------------------|--------|
| Fan with 6" Downrod | 16.64" | 16.33" | 12.20" |
| Fan with 12" Downrod | 22.64" | 22.33" | 18.20" |
| Fan with 18" Downrod | 28.64" | 28.33" | 24.20" |
| Fan with 24" Downrod | 34.64" | 34.33" | 30.20" |
| Fan with 36" Downrod | 46.64" | 46.33" | 42.20" |
| Fan with 48" Downrod | 58.64" | 58.33" | 54.20" |
| Fan with 60" Downrod | 70.64" | 70.33" | 66.20" |
| Fan with 72" Downrod | 82.64" | 82.33" | 78.20" |

Airflow/Energy Efficiency Info (120V)

| Fan Speed | High | Medium | Low |
|-----------|-------|--------|------|
| Max RPM | 73 | 54 | 29 |
| CFM | 13103 | 10248 | 5923 |
| CFM/Watts | 322 | 764 | 1707 |
| Amps | .48 | .18 | .06 |
| Watts | 41 | 29 | 3 |

Light Bulb Information (120V)

| | |
|---------------|------|
| Bulb Type | LED |
| Watts | 18 |
| QTY | 1 |
| Lumens Amount | 1400 |
| Color Temp | 3000 |
| CRI | 90% |

Energy Guide FTC

| | |
|--|------|
| Power (W _{ave}) | 27 |
| Total Air Delivery (CFM _{ave}) | 7210 |
| Estimated Yearly Energy Cost (\$) | 8 |
| Ceiling Fan Efficiency (CFM/W) | 268 |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC165NL sensorless DC motor is designed for optimal performance with this fan.

BLADE SET:

A set of nine 38" all weather composite blades

LIGHTING OPTIONS:

One removeable 18-watt LED included.

CONTROL OPTIONS:

Hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Instruction is provided with control.

DOWNROD OPTIONS:






Fan comes with 1" dia. x 6" long wet-location downrod. Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 24" downrod.

LOCATION USE:

Fan is rated for dry, damp and wet locations.

AVAILABLE FINISHES:

All finishes come with opal frosted glass and a steel cap

-  Brushed Nickel with Brushed Nickel blades
-  Matte Black with Matte Black Blades
-  Dark Bronze with Dark Walnut blades
-  Matte Gray with Weathered Wood Blades
-  Matte White with Matte White blades



Portland Flagship
2181 NW Nicolai Street, Portland, OR 97210
503-230-7113

New York
27 Vestry Street, New York, NY 10013
212-226-6113

Trade Sales
trade@schoolhouse.com
1-844-209-7735