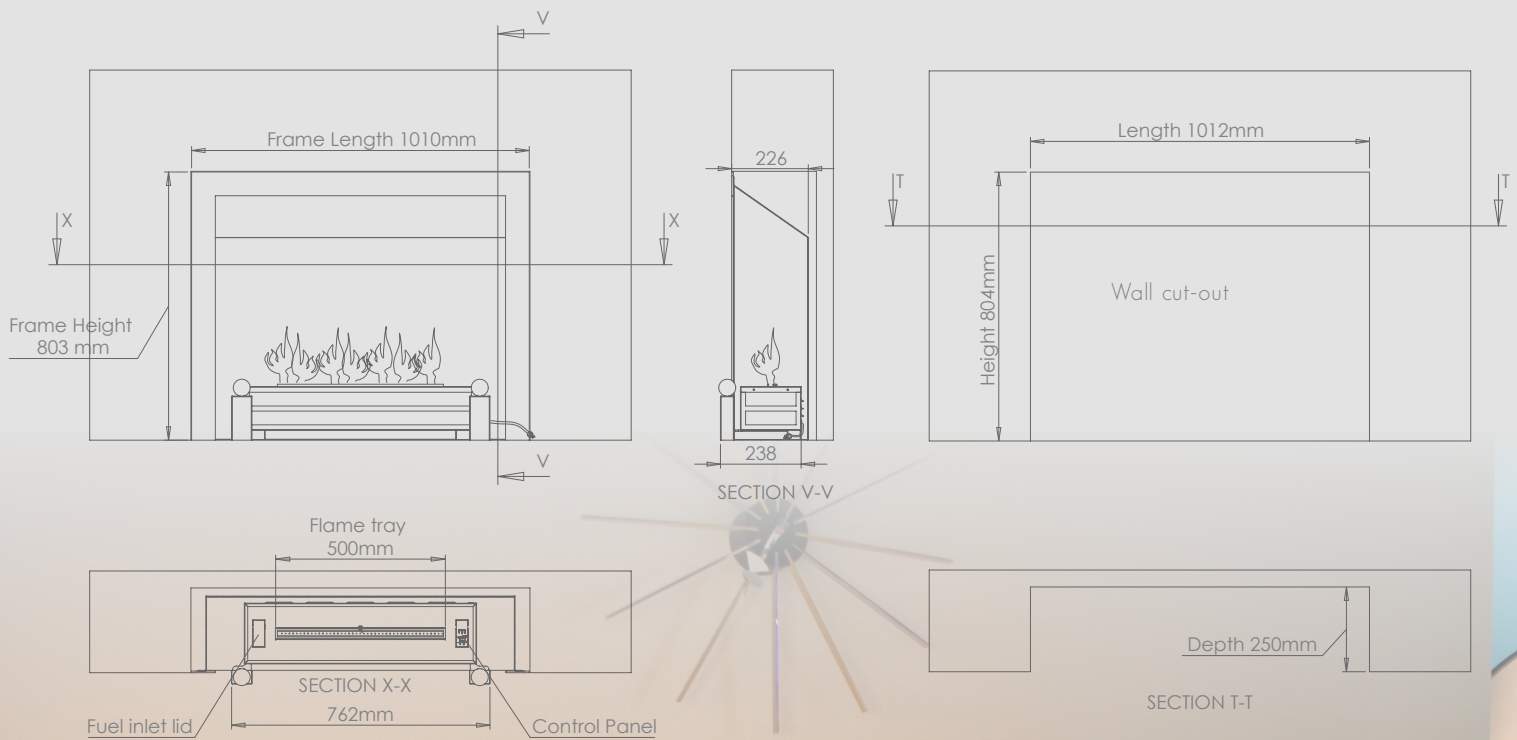# WESTMINSTER BASIC™

Westminster Basic is a built-in bioethanol fireplace featuring the Denver Basic automatic burner.

Featuring the e-Ribbon Fire™ burning system, Westminster Basic® is suitable for various fireplace applications, where safety and ease of use are in focus.

V

Frame Length 1010mm

X

X

Frame Height 803 mm

V

226

238

SECTION V-V

Length 1012mm

T

T

Height 804mm

Wall cut-out

Flame tray 500mm

SECTION X-X

762mm

Fuel inlet lid

Control Panel

Depth 250mm

SECTION T-T

WESTMINSTER BASIC™

FEATURES

- e-Ribbon™ technology
- Fuel level indicator
- Flame level indicator
- 3 flame levels
- Safety sensors
- No chimney required
- 2mm Steel casing and baseplate
- Black
- Safety chamber
- Child lock

OPTIONAL

- Upgrade to Bluetooth / App and six flame levels
- 80mm high glass screen to front
- Stone surrounding

TECHNICAL INFORMATION

Flame tray size: 500mm
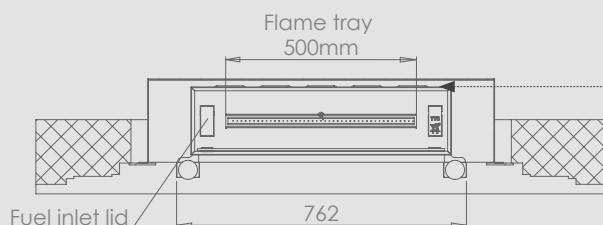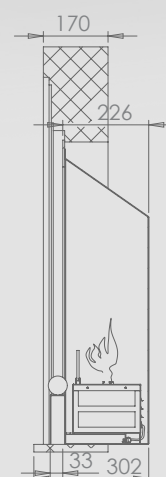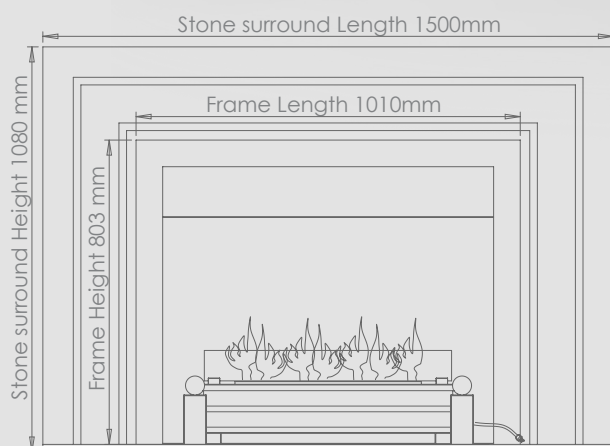**Capacity:** 4L
Fuel consumption: 0,2 - 0,55 l/h
Burning time: 7h - 20h
**Heat output:** 1,2 - 3,2 kW
Net weight: 60 kg
Minimum room size: 64m3
Power supply: 220V - 240V - 50 Hz
Finish: Powder-coated Steel and brushed/polished stainless steel

Stone surround Length 1500mm

Frame Length 1010mm

Stone surround Height 1080 mm

Frame Height 803 mm

170

226

33   302

Flame tray
500mm

Fuel inlet lid   762

Control Panel

Service USB

FLAME LEVEL
1 2 3   Flame level Indicator

Fuel Level Indicator
FUEL LEVEL

On / Off   Start / Stop
Flame level Down   Flame level Up

WESTMINSTER BASIC™

www.decoflame.com

Step 1: Make sure that the dimensions of the wall cut-out correspond to the those indicated in the technical drawing received with your fireplace.

Step 2: (If purchased, place the stonesorround against the wall) Recess the fireplace into the wall cut-out according to the indications in the User's manual.

Step 3: Connect the fireplace to a source of electricity.

Step 4: Place the burner and legs inside the casing. (If purchased, place the glass screen and holders on the top plate.)

Step 5: Turn on ⏻ the fireplace. Fill in the right amount of bioethanol by verifying the level on the indicator.

Step 6: Start the fireplace by pressing the Play/Start ▶ button on the control panel.

Enjoy your fire.

Decoflame Bluetooth Application Installation

App Store

Google play

| Model:	Denver Basic 720 - black	CE
Dimensions:	720x215x125mm - Flame Tray 500	
Power Supply:	220/240V - 50zH must be earthed ⏚	
Serial Number:	72000.05.16.V1.001	
Thermal Output:	max 2.9 kW	
Fuel Type:	bioethanol 96%	
Room Volume:	min. 58 m3	
Radio Frequency:	433.92 MHz	
Bluetooth Code:	0001	
Manufacturer:	*Decoflame ApS - Made in Denmark*	

1. Download and install the Decoflame App by scanning the QR code above corresponding to your smart device's operating system.

2. In order to pair your fireplace with your smart device, start the fireplace by pressing the 'ON' button.
Start the App and choose your fireplace.
Insert the code from YOUR rating plate, like the one highlighted above.

3. Once your device is paired, the fireplace should be visible on the app. You are now able to change the name of the fireplace.
**Note:** You are able to pair more than one fireplace like described in the step nr. 2 and give them different names.

4. Once you have selected your fireplace, you can turn it on by pressing 'START'. If the fireplace has already been turned on using the control panel, you can now monitor the fuel level and the consumption.

5. For the 'Turn Off Timer' press the clock icon in the lower right corner. To adjust the remaining time, slide the dot to the left and right and select 'SET TIMER'. The remainig burning time can be changed by repeating the above mentioned steps. To cancel the timer select 'CLEAR TIMER'.
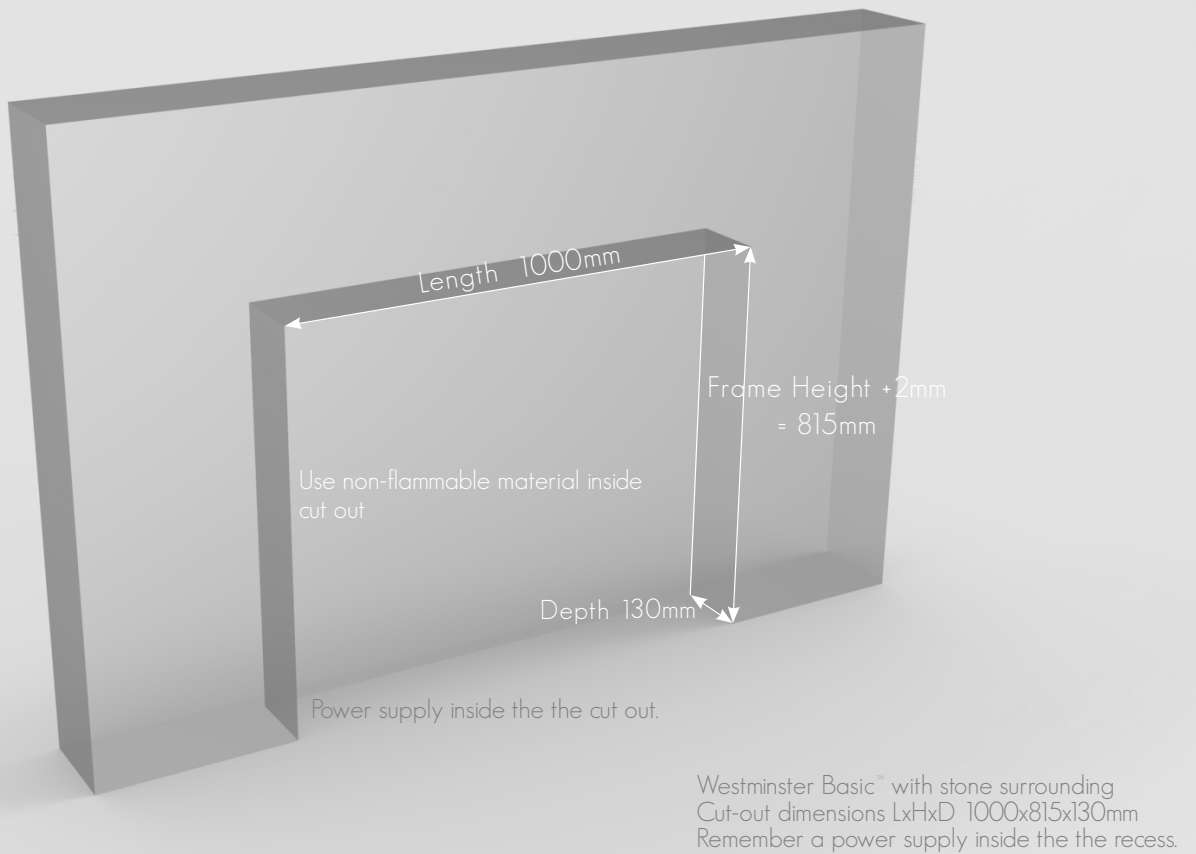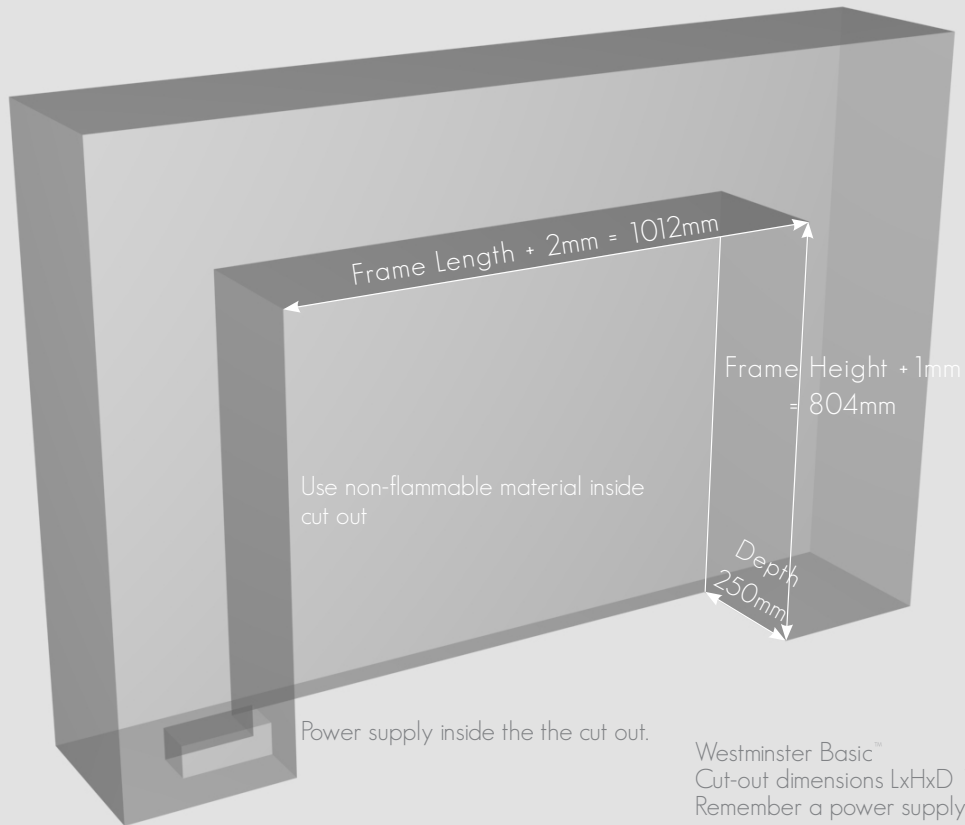
6. For adjusting the flame intesity, select the desired level on the left side of the screen. (1-lowest, 6-highest)
Should there not be enough fuel for the selected burning time - the fireplace will shut down automatically.
Select 'STOP' to turn off the fireplace.

Decoflame Technical Information

WESTMINSTER BASIC™

Cut-out dimensions

Frame Length + 2mm = 1012mm

Frame Height + 1mm = 804mm

Depth 250mm

Use non-flammable material inside cut out

Power supply inside the the cut out.

Westminster Basic™
Cut-out dimensions LxHxD 1012x804x250mm
Remember a power supply inside the the recess.

Length 1000mm

Frame Height +2mm = 815mm

Use non-flammable material inside cut out

Depth 130mm

Power supply inside the the cut out.

Westminster Basic™ with stone surrounding
Cut-out dimensions LxHxD 1000x815x130mm
Remember a power supply inside the the recess.

WESTMINSTER BASIC™

It is imperative to follow the indications in the User's manual concerning the installation of decorative or electronic items above the fireplace. The dimensions below is valid for installing a TV over a westminster firepace, even though it is not the one shown.

min. 200mm

min. 100mm

min. 800mm

Heat Zone - Up to 60 C
Use Appropiate Material

min. 300mm

min. 50mm

min. 1000 mm

min. 1000 mm