

AUTO, MARINE and BATTERY CABLE

Single Core Cable



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C16	3	14/0.32	1.13	20	2.2	30/100
C14*	4	23/0.32	1.84	28	2.6	30/100
C12	5	36/0.32	2.90	37	3.0	30/100
C10*	6	57/0.32	4.59	48	4.0	30/100

Colours: Black ■, Red ■, Blue ■, Green ■, Yellow ■, Brown ■, White □, Violet ■, Orange ■, Pink ■, Grey ■
3-4mm available in a wide range of trace colours.

*Also available in Marine (Tinned)

Double Insulated Cable (gas)



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C16DI	3	14/0.32	1.13	20	3.8	30/100
C14DI	4	23/0.32	1.84	28	4.2	30/100
C12DI	5	36/0.32	2.90	37	4.9	30
C10DI	6	57/0.32	4.59	48	5.7	30/100

Colours: Black Sheath with Red Core ●

Figure 8 / Speaker Cable (2 colour)



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C20T	2 x 2	14/0.2	0.44	2.5	2.4 x 4.8	100
C18T	2 x 2.5	24/0.2	0.75	5	2.6 x 5.1	100
C16T*	2 x 3	14/0.32	1.13	10	2.6 x 5.9	100
C14T*	2 x 4	23/0.32	1.84	15	3.1 x 6.7	100

Colours: Black/White ●●, Red/Black ●●, Red/White ●●, Blue/White ●●, Brown/White ●●

*Also available in Marine (Tinned)

Twin Sheathed Cable



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C2/18*	2 x 2.5	7/0.32	0.56	8	3.1 x 5.1	100/500
C2/16*	2 x 3	14/0.32	1.13	16	3.3 x 5.5	30/100/500
C2/14+	2 x 4	23/0.32	1.84	22	3.8 x 6.3	30/100
C2/12**	2 x 5	36/0.32	2.90	29	4.5 x 7.4	30/100
C2/10+	2 x 6	57/0.32	4.59	38	5.7 x 9.6	30/100
C2/8	2 x 8B&S	96/0.32	7.71	59	7.1 x 12.5	10/30/50
C2/6	2 x 6B&S	168/0.32	13.50	82	8.8 x 16	10/30/50
C2/2	2 x 2B&S	399/0.32	32.07	150	13.4 x 24.6	30

Colours: Black Sheath with Red and Black Cores ●●

* Brown/White Cores Available ●●

** Red/Blue Cores Available ●●

+Also available in Marine (Tinned)


AUTO, MARINE and BATTERY CABLE

Thin Wall Auto Cable



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C18TW	2	16/0.20	0.5	10	1.5	100/500
C16TW	3	32/0.20	1.0	15	2.0	100/500
C14TW	4	28/0.30	2.0	20	2.55	100/500

Colours: Black ■, Red ■, Blue ■, Green ■, Yellow ■, Brown ■, White □, Violet ■, Orange ■, Pink ■, Grey ■
Available in a wide range of trace colours.

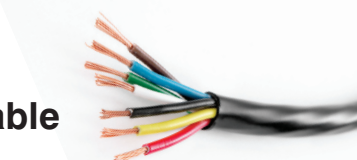

Multi-Core Sheathed Cable

Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C3/16	3 _{core} X 3	14/0.32	1.13	14	5.7	30/100
C4/16	4 _{core} X 3	13/0.30	0.92	12	6.7	30/100
C5/18	5 _{core} X 2	7/0.32	0.56	7	6.0	30/100/500
C5/16	5 _{core} X 3	14/0.32	1.13	11	7.1	30/100/500
C5/14	5 _{core} X 4	23/0.32	1.84	15	8.2	30/100
C7/18	7 _{core} X 2	7/0.32	0.56	5	6.7	30/100
C7/16	7 _{core} X 3	14/0.32	1.13	10	7.7	30/100
C7/14	7 _{core} X 4	23/0.32	1.84	14	8.9	30/100
C4/6653	2 _{core} X 6 1 _{core} X 5 1 _{core} X 3	57/0.32 36/0.32 14/0/32	4.59 2.9 1.13	38 37 20	10	30/100

Colours: 1. White, 2. Yellow, 3. Brown, 4. Red, 5. Green, 6. Black, 7. Blue

Battery Cable



Part No.	Auto Size	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C8*	8B&S	96/0.32	7.71	74	5.5	10/ 30/100
C6	6B&S	168/0.32	13.50	103	7.2	10/30/100
C4	4B&S	252/0.32	20.26	135	8.3	10/30/100
C3	3B&S	329/0.32	26.45	168	10.2	10/30/100
C2*	2B&S	399/0.32	32.07	188	11.3	10/30/100
C1	1B&S	492/0.32	39.55	210	12.1	10/30
C0	0B&S	608/0.32	49.00	246	12.7	10/30
C00	00B&S	798/0.32	64.15	292	14.5	10/30
C000	000B&S	1035/0.32	83.19	335	16.4	Per Meter

Colours: Black ■, Red ■

*Also available in Marine (Tinned)

High Tension Lead



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C7HT	3	16/0.30	1.13	20	7.0	30/ 100

Colours: Black Sheath with Copper Core

AUTO, MARINE and BATTERY CABLE

Hook-Up Cable



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Voltage Rating	Nom OD _{mm}	Roll Length _m
C7/.2	-	7/0.20	0.22	110	1.5	100/500
C10/.25	-	10/0.25	0.50	110	2.0	100/500
C24/.2	-	24/0.20	0.75	250/440	2.55	100/500

Colours: Black ■, Red ■, Blue ■, Green ■, Yellow ■, Brown ■, White □, Violet ■, Orange ■, Pink ■, Grey ■

Security/Data Cable



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Amp Rating	Nom OD _{mm}	Roll Length _m
C SEC.14208	-	8 x 14/0.20	0.44	3	6.3	100
C2SC24/.2 SCREENED	-	2 x 24/0.20	0.75	6	6.8	100
C2SC7/.3-100E SCREENED	-	2 x 7/0.30	0.50	3	5.8	100
C4/SEC.5/100	-	4 x 14/0.20	0.44	3	4.8	100

Extension/Circular Cable



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Voltage Rating	Nom OD _{mm}	Roll Length _m
C3-0.75MM2-100A	-	3 x 24/0.20	0.75	250/250	6.20	100
C3-1MM2-100A	-	3 x 32/0.20	1.00	250/440	7.50	100

Colours: Black Sheath with Blue, Brown, Green/Yellow Cores

Silicone Cable (150°C)



Part No.	Auto Size _{mm}	Strand Size _{mm}	Nom Area _{mm²}	Voltage Rating	Nom OD _{mm}	Roll Length _m
C30/.25	-	30/0.25	1.50	250/250	6.3	100
C32/.2	-	32/0.20	1.00	250/250	6.8	100

Curly Cable

Part No.	Auto Size _{mm}
KC1	3 _{core} X 4
RC026	7 _{core} X 2
B24120-00	2 _{core} X 3

