


- NOTES:
1. IMPELLER TO BE MEASURED FROM INSIDE OF HOUSING TO BACKPLATE OF IMPELLER WITH SHAFT ENDPLAY PUSHED IN.
 2. MOTOR MUST START AT 202 VOLTS.
 3. STATIC TAP READING IS TO BE -.157 TO -.207 MINIMUM CORRECTED TO STANDARD AIR (0.075 LB/FT³) WITH A 1 3/4 I.D. INLET RESTRICTOR.
 4. 100% HIPOT BLOWERS AT 1500 VOLTS FOR 1 SECOND.
 5. QUALITY AUDIT MUST INCLUDE VIBRATION CHECK AT LOCATIONS SHOWN ON DRAWING. MAXIMUM ALLOWABLE DISPLACEMENT .001" [.025].
 6. QUALITY AUDIT MUST INCLUDE UNUSUAL NOISE CHECK IN QUIET ROOM. CHECK MINIMUM OF (2) BLOWERS PER PALLET.
 7. INSPECTION TEST FIXTURING IS REQUIRED.
 8. PACK 1 PER CONTAINER, 12 CONTAINERS PER LAYER, 3 LAYERS PER PALLET, 36 MAX. PER PALLET, PACKING ASSY. 87854866, PER 88834200 AND 88834408.
 9. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE 88834408.
 10. NO PACKAGING TAPE OVER CARTON LABEL.

Uncontrolled Copy


THERMALLY PROTECTED
CLASS "B" INSULATION
416 SS SHAFT

APPLICATION:	DIST.	B	LA	FR	A	S	C	E	B	A
CUSTOMER:	FASCO DIST.	GE	21	47	V	04	CF	5	3	0
CUSTOMER PN:	A169	FINISH: BLOWER-NATURAL, MOTOR-FLAT BLACK								

LEAD MATERIAL
18 GA. 125°C 4/64 INSUL.
EPDM, (1) YELLOW, (1) BLACK
14.00/12.00 [355.60/304.80]
W/FSPADE TERMS.
AMP 2-520263-2

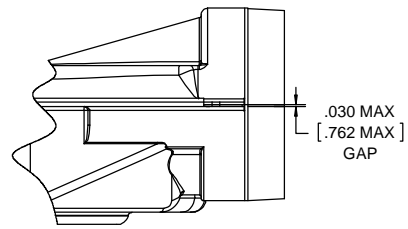

DETAIL "A"

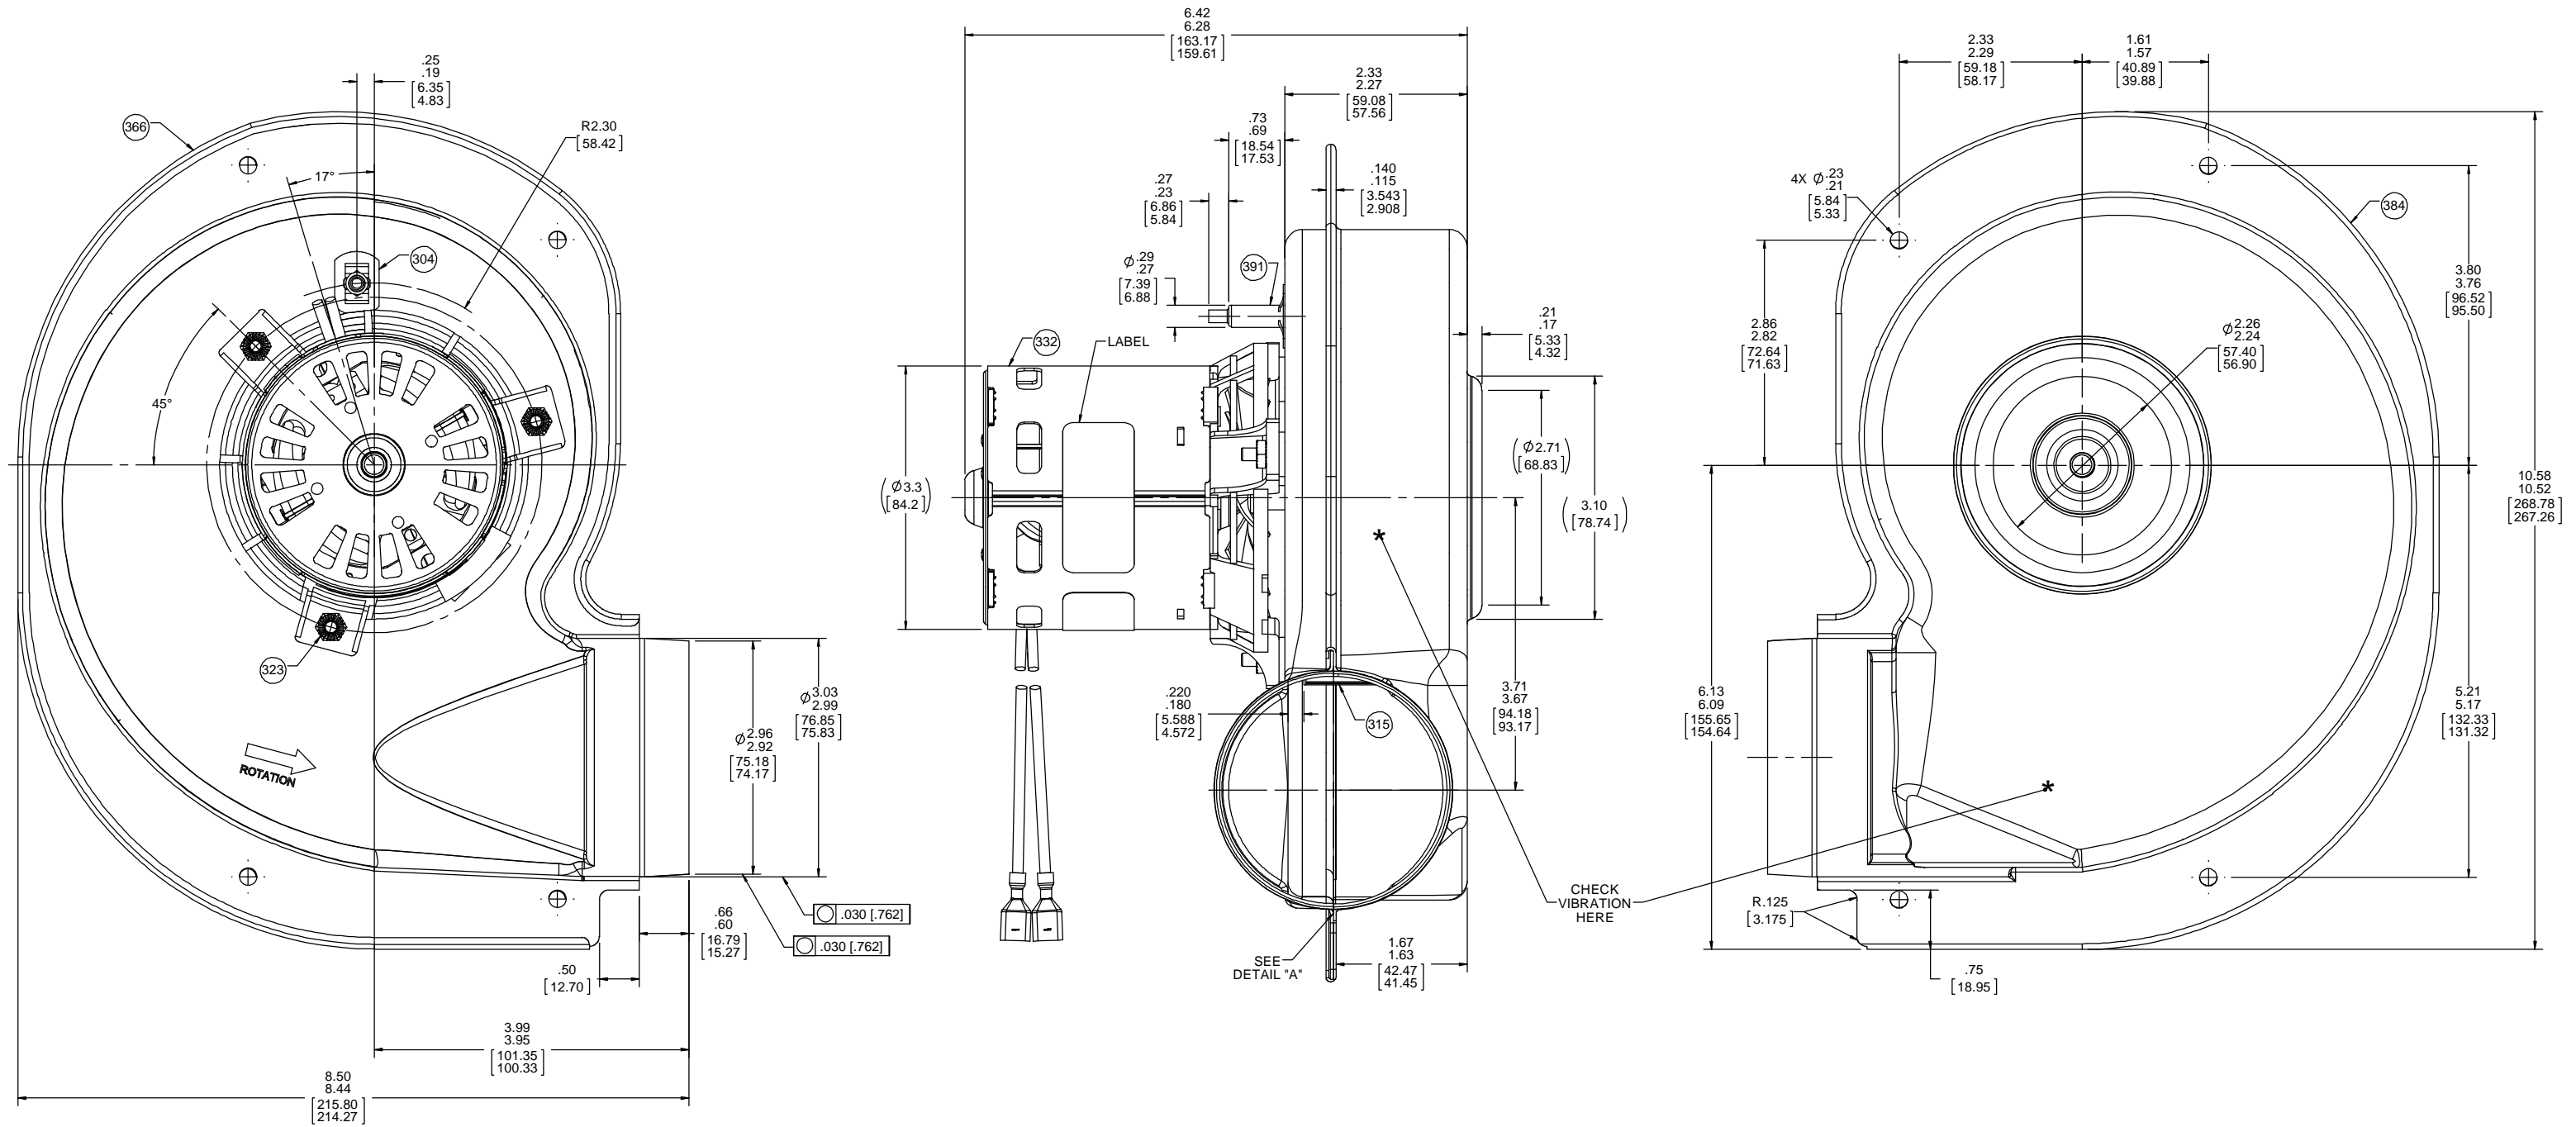

TYPICAL PERFORMANCE TEST DATA WITH 1 3/4 INLET RESTRICTOR			
AT 230 VOLTS 60 Hz			
	RPM	WATTS	AMPS
MAX.	3133	114	.77
MIN.	3029	93	.63
BLOWER WEIGHT	5 1/8 LBS.		ENDPLAY .030/.010 [.762/.254]

DRAWING REVISION AA	REVISION BY MLS	DATE 9/21/2018	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH mm ANGLE .X ±0.1 #2.5 ±1° .XX ±0.01 #0.25 ±.1° .XXX ±0.005 #0.127 ±.05° XXXX ±0.0005 #0.0127 ±.02°	DRAWN BY MLS	DATE 9/21/2018	DESCRIPTION OUTLINE		
ECO-0153008	APPROVED BY FDP	DATE 9/21/2018	REMOVED BURRS & BREAK SHARP EDGES: .003/.015 [0.076/.381] X 45° CORNER FILLETS: R.02 [51] MACHINED SURFACES: 125 INCR/MLV mm SHOWN IN [BRACKETS]	APPROVED BY FDP	DATE 9/21/2018	DESCRIPTION OUTLINE		
<small>PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. CONSENT AND CONFIRMATION OWNERS PROPRIETARY INFORMATION, ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.</small>			<small>REGAL BELOIT AMERICA, INC.</small> Regal Beloit America, Inc.	MATERIAL	PROCESS/FINISH	SIZE D	DRAWING NUMBER 702111567	SHEET 1 OF 1