
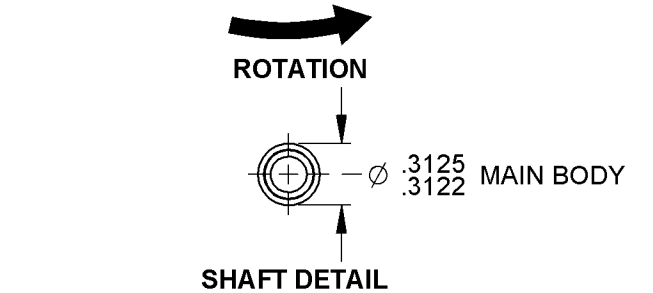


LEAD MATERIAL  
 18 GA. 105°C 4/64 INS.  
 THERMO. SPT-3, 2 COND.  
 PARALLEL BLACK  
 24.00/22.00 IN. LONG  
 1.75/1.25 IN. LONG RIP  
 .56/.44 IN. LONG STRIP

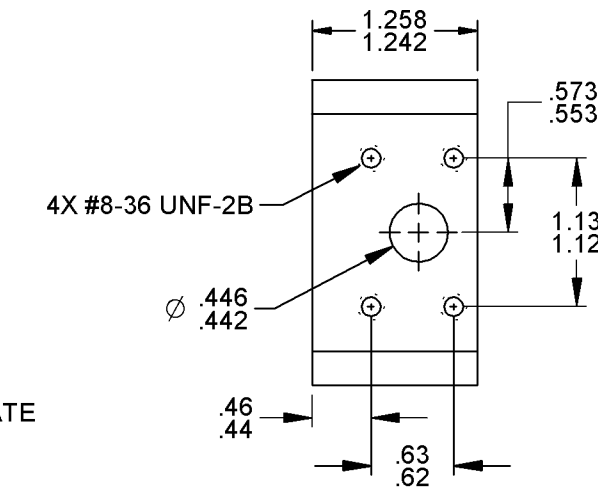

- NOTES:  
 1. PACK 210 MAX. MOTORS PER PALLET.  
 2. FACE OF DRIVER MUST BE PERPENDICULAR TO SHAFT WITHIN .007 T.I.R.  
 3. SHIP (1) MOUNTING KIT WITH EACH MOTOR.  
 4. CENTER LINE OF HOLES IN BRACKET TO BE PARALLEL WITH FACE OF CLIP PLATE WITHIN .020 T.I.R.  
 5. NO PACKING TAPE OVER CARTON LABEL.

0046-4072	0046-4282	
<b>FASCO</b>	Fasco Industries, Inc. Motor Division	<b>SAFETY WARNING</b>
Assembled In Mexico No. 71634801 115 V 1.3 A Model D437	TYPE U63B1 T.P. TEAO LR6319 50/60 Hz Class B 1550/1300 RPM	This Motor Must Be Grounded in Accordance With Local Or National Electrical Codes To Prevent Possible Injury Due To Electrical Shock
16 Watt		Max Amb: 40°C
61299553		

<b>FRONT SHAFT POSITION</b>	<b>* TYPICAL PERFORMANCE AT 115 VOLTS 50/60 Hz.</b>												CUSTOMER: FASCO DISTRIBUTOR	<b>FASCO</b> FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION
HORIZONTAL 	MOTOR SPEED	IDLE			LOADED			LOCKED			BREAK	PART NUMBER: D437		
		R.P.M.	AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.	APPLICATION:	CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.
	50 Hz	1452	1.11	66	20.5	1300	1.17	88	10.8	1.62	131	27.7	MOTOR WEIGHT: 2.90 LBS.	MOTOR TYPE
	60 Hz	1757	.90	54	18.9	1550	1.03	78	8.8	1.44	112	22.2	ENVIRONMENT: DRY	DRAWING NUMBER
CUSTOMER APPROVAL: SIGNED: DATE:													FINISH COLOR: BLACK	7163 4801
													DRAWN BY: V. LEONARD	REV. 19
													DATE DRAWN: 10-7-2002	00 63 33 T 03 DY 5 3 0