

2021 F150 MKV LOW BEAM INSTALLATION

To gain access to the Front Marker bulb, going through the wheel well liner is the easiest way.

STEP 1

Remove the three screws seen in the photos below to be able to push your wheel well liner out of the way. Using a size 7mm socket or a phillips head screw driver remove the screws in the photos below.



The first two screws are located right inside the wheel well, and the screw connecting the wheel well liner to the trim piece is at the top of the wheel well.


Once you have removed these screws, push the wheel well liner out of the way to gain access to the Low beam bulb.

Now that you have removed these screws, push the wheel well liner out of the way to gain access to the Low beam bulb.



STEP 2

Remove the OEM Rubber cap and Low beam bulb. The Low beam bulb is the Higher bulb in the headlight assembly.

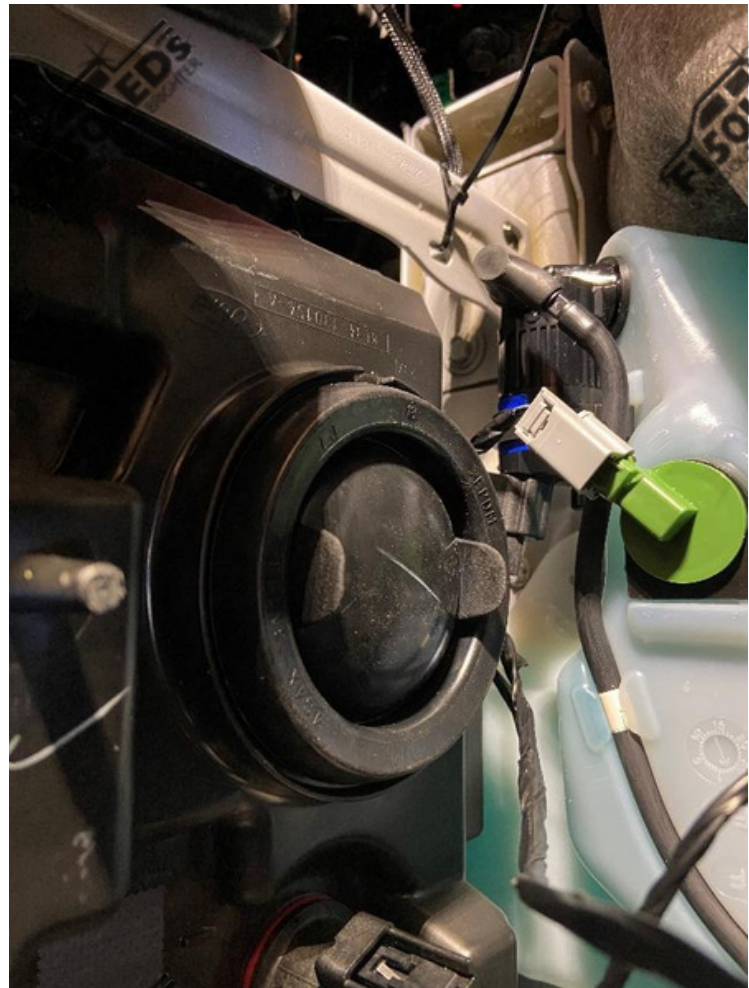

Once the Rubber cap is removed turn the Low beam bulb counterclockwise to release it from the housing.

Now that the bulb is removed, disconnect the bulb from the factory harness.



STEP 3


Installing the MKV Low beam bulb.

Before installing the bulb connect the MKV Low beam bulb to the included Ballast.








Once they are connected, connect the ballast to the factory low beam harness.

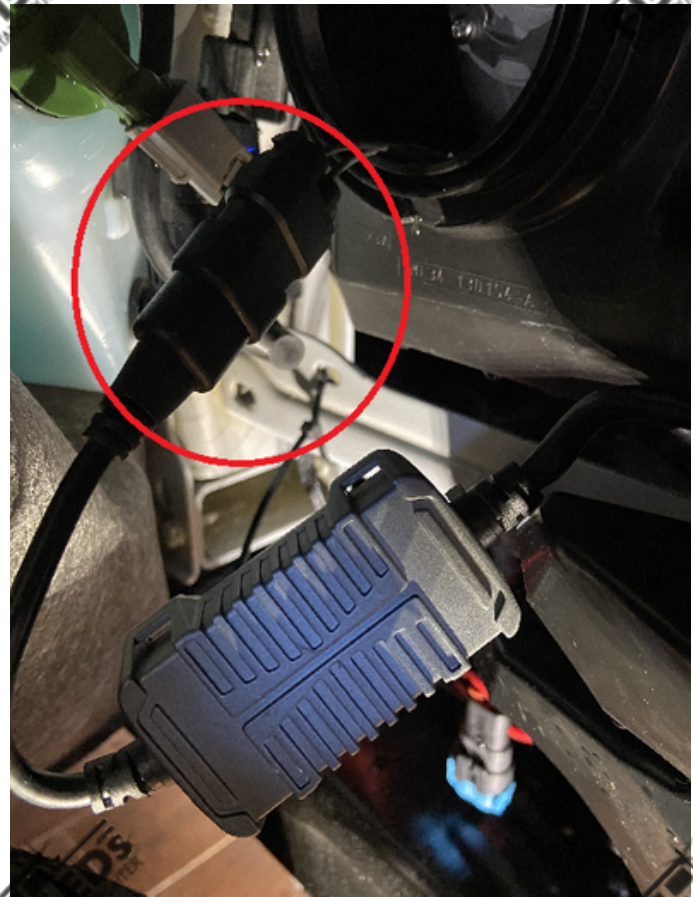


Next, slide this connection into the bottom of the Low beam housing then slide the ballast into the bottom of the Low beam housing as well.

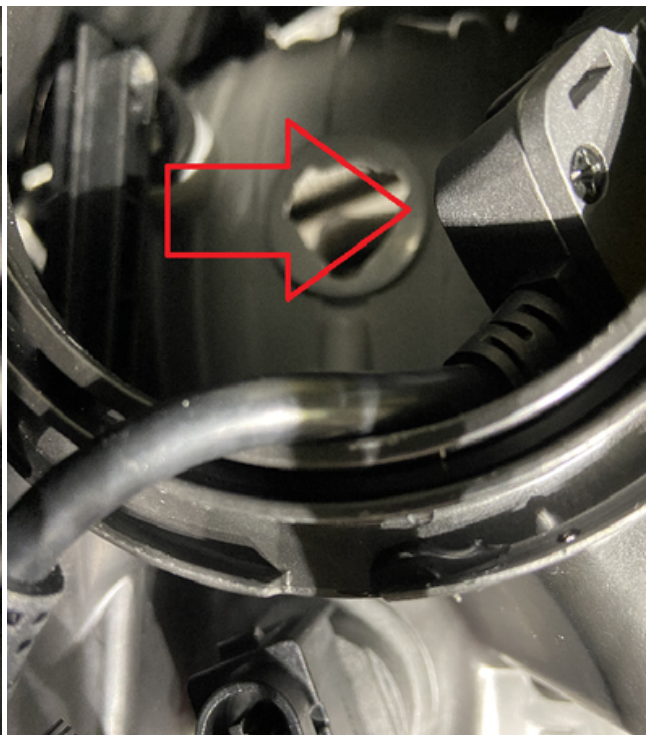



Once this is done, take the MKV Low beam bulb line up the tabs with the tabs in the housing and slide it into place and give it a clockwise turn to lock it into place. The opening for the Low beam bulb is deeper inside the housing than the high beam bulb so you will need to reach inside the housing to lock this bulb into place.

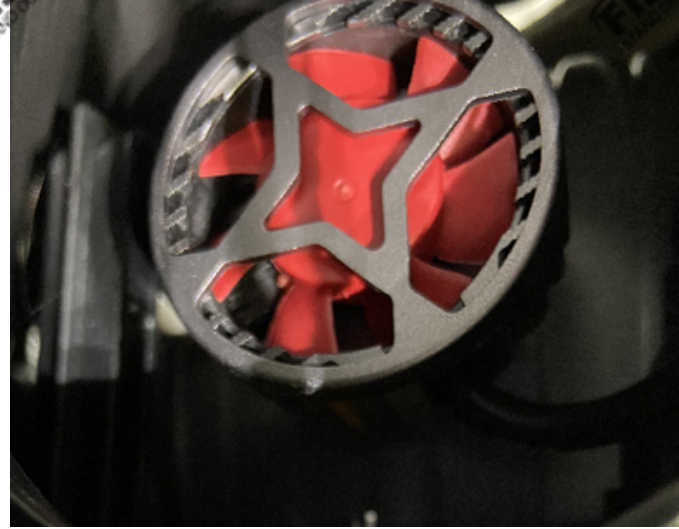

After installing the bulb, take the rubber grommet included with the kit and place it over the opening.



STEP 4

Put the wheel well liner back into place and screw the screws back into place and repeat for the other side of the truck!



Text for support: 706-214-2618
 Visit our site to chat: www.F150LEDs.com
 or email CustomerSupport@F150LEDs.com

