



HOME > PRODUCTS > PROJECTORS > **EPSON EB-2265U**

Epson EB-2265U



[+ ENLARGE IMAGE](#)

Corporate Portable Multimedia Projectors

Change the way you do meetings

If you are interested in purchasing an Epson Projector please call **0800 377 664** to discuss your requirements or to find projector resellers in your area.

[Printer Friendly Specs](#)

[Distance Calculator](#)

[Download](#)



Overview

KEY FEATURES & BENEFITS

- 3 x Brighter Colours and reliable performance* – 3LCD, 3-Chip Technology. Look for both high colour brightness and high white brightness
- Crisp Clear Resolution – WUXGA image resolution (1920 x 1200)
- Versatile Connectivity – Easily integrate with any system with HDMI and MHL
- HDBaseT – Transmit Full HD video and audio, Ethernet and serial communication through a single CAT 5/6 cable that can be extended up to 100m
- Endless Wireless Functionality – Wi-Fi, Wi-Di and Miracast Certified
- Gesture Presenter – Simply move your hand in front of the presentation
- Split Screen – simultaneously project two images, video or still, side by side, from two different sources
- USB Display Function – Project via a simple USB cable connection without having to change the monitor output setting on the PC
- Automatic Setup – The Automatic Screen Fit function adjusts focus, zoom, horizontal and vertical keystone all at the touch of a button
- Remote Network Monitoring and Control – Plus Message Broadcasting and built-in schedule functions with EasyMP® software / Multi-PC Projection



3x Brighter Colours with Epson*


Brilliant image quality requires high colour brightness (colour light output), and Epson® 3LCD projectors have 3 x Brighter Colours than leading competitive projectors*.

One brightness measurement (lumens) is not enough. A projector's specification needs to show both high colour brightness and high white brightness. If colour brightness is lower than white brightness, images may be dark, dull and lose detail. If not provided, be sure to ask for a projector's colour brightness specification.

** Compared to leading 1-chip DLP business and education projectors based on NPD data, July 2011 through June 2012. Colour brightness (colour light output) measured in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions.*

3LCD technology

All Epson projectors are based on 3-chip LCD technology for amazing colour, incredible detail and solid reliability. 3LCD's 3-chip architecture dedicates an entire chip to process each primary colour – red, green and blue, continuously. Unlike single-chip technology that delivers colour sequentially, you get full-time colour. The result is vibrant, realistic images and video all delivered with 3LCD's true-to-life colour.

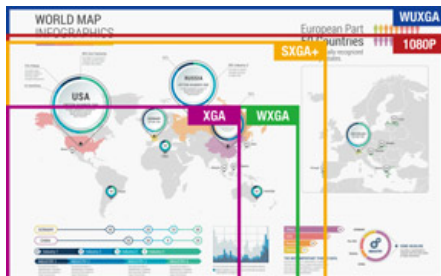

Brilliant high definition image up to 300"

Featuring native resolution up to WUXGA (1920 x 1200), the Epson EB-2000 series delivers high quality images and crisp, sharp text without any distortion.

Images can be projected on a large screen with no information left out. This applies to video output devices such as PCs and smart devices with their ever increasing image quality and higher definition and accommodates a variety of content including 3D CAD, digital broadcasts, Blu-ray, and internet movies.


High brightness

Even though its light weight and compact size enables it to be carried from room to room, the projector is capable of highly visible images thanks to its high brightness (up to 5,500lm) and superior 15,000:1 contrast ratio. Room lights don't have to be dimmed to see bright and clearly projected images, allowing meeting participants to concentrate better for improved meeting productivity.

Incredible HDBaseT* and diverse connectivity (EB-2165W & EB-2265U only)

Support for HDBaseT is now available on new EB-2000 series. HDBaseT provides Full HD video, audio and Ethernet while the HDBaseT cable enables control up to 100 meters away in network installed with Category 5e and above – a smart solution for large venues.

**The HDBaseT and the HDBaseT Alliance logos are trademarks of the HDBaseT Alliance.*

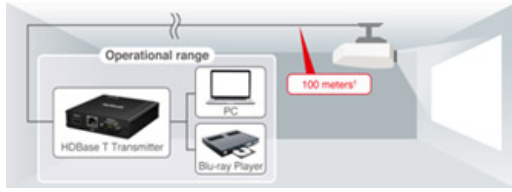

WiDi and Miracast certified (EB-2165W & EB-2265U only)

With support for screen mirroring, users can project their smartphone or tablet screens without a cable connection. Stream your content from a smartphone or tablet via MHL® or, wirelessly using Miracast.



Epson iProjection App

Display and control content from your iPhone, iPad or iPod touch, Android and Chrome devices with the Epson iProjection App. This free application allows road warriors to travel light and present from their mobile devices. The app is easy to use and intuitive menu options bring your content to the bigger screen.

Auto V/H keystone and screen fit

In cases where the image extends beyond the frame of the screen or whiteboard you just have to push the "Screen Fit" button and the image frame automatically matches up with the edges of the screen.



Auto power on feature

The projector starts automatically upon connecting a VGA*, HDMI**, or USB cable to the device itself. This feature means you no longer have to use the power on button because startup is activated with cable insertion.

*VGA auto power on is available with Computer 1 only
 **HDMI auto power on is available with HDMI1 only



Gesture presentation

Present smarter with newly added 'gesture presentation' function. Simply move your hand in front of the arrows, and make your presentation more engaging and realistic with the audience.



Split Screen

Split Screen allows you to display content from two inputs simultaneously, side by side, on a single screen. With three layout options you can display video and presentation materials, and run video on both screens.

| | PC1 | PC2 | Video | HDMI1 | HDMI2 | USB-B | USB-A | RJ45 | Wi-Fi (AP10) | Screen Mirroring |
|------------------|-----|-----|-------|-------|-------|-------|-------|------|--------------|------------------|
| Computer1 | | N/A | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Computer2 | N/A | | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Video | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| HDMI1 | Yes | Yes | Yes | | N/A | Yes | Yes | Yes | Yes | N/A |
| HDMI2 | Yes | Yes | Yes | N/A | | Yes | Yes | Yes | Yes | N/A |
| USB-B | Yes | Yes | Yes | Yes | Yes | | N/A | N/A | N/A | Yes |
| USB-A | Yes | Yes | Yes | Yes | Yes | N/A | | N/A | N/A | Yes |
| RJ45 | Yes | Yes | Yes | Yes | Yes | N/A | N/A | | N/A | Yes |
| Wi-Fi | Yes | Yes | Yes | Yes | Yes | N/A | N/A | N/A | | N/A |
| Screen Mirroring | Yes | Yes | Yes | N/A | N/A | Yes | Yes | Yes | N/A | |

New home screen

New home screen offers quick and easy access to a variety of useful functions. Also, all source information, no matter what the source input is, can be seen at a glance. Wireless connections can be made easily because all the information you need is right there on the screen.



EasyMP Multi-PC projection

The EasyMP Multi PC Projection application makes it possible to connect with up to 50 computers and partition the screen for split screen projection.

The moderator can select up to 4 of the connected devices and project their screens from the projector, maintaining control and preventing interference with the projected screen.

EasyMP Monitor

With EasyMP Monitor, Epson's network monitoring and control software, a single PC can see which projectors are available and if they are running efficiently, even across the biggest of networks. This series can be configured remotely, with instant email alerts for pre-defined critical indicators such as non-functioning devices or overheating lamps. Each projector's serial number can also be accessed remotely via LAN/serial connection.

Wireless LAN Enterprise security

The EB-2000 series projectors now include 'WPA-Enterprise security' mode to connect in robust integrated network environment; compatible with WPA, WPA2-PSK and WPA2-EAP security protocols.

Longer lamp life

The long 10,000H* lamp life saves time and money by reducing the frequency of costly lamp replacements.

*Power Consumption: ECO mode



Connectivity Panel



Specification

| | |
|------------------------------|---|
| PRODUCT NAME | Epson EB-2265U |
| PRODUCT CODE | V11H814053 |
| EAN | 9314020623745 |
| TECHNOLOGY | |
| Projection System | Epson 3LCD, 3-chip technology |
| LCD Panel | 0.76-inch panel |
| OPTICAL | |
| Zoom | 1-1.6 (Optical Zoom) |
| Screen Size | 50" to 300" [1.46m to 8.95m] (Zoom: Wide) 50" to 300" [2.43m to 14.79m] (Zoom: Tele) |
| Projection Distance | 80" screen 2.36m - 3.92m |
| Throw Ratio | 1.38 (Zoom: Wide), 2.28 (Zoom: Tele) |
| Projection Lens F Number | 1.5 - 2.0 |
| Projection Lens Focal Length | 23mm - 38.4mm |

| | | |
|--|--|--------------------|
| Focus Method | Manual Focus | |
| Offset | 10:1 | |
| IMAGE | | |
| Colour Light Output | 5,500 Lumens | |
| White Light Output | 5,500 Lumens | |
| Resolution | WUXGA | |
| Native Aspect Ratio | 16:10 | |
| Contrast Ratio | 15,000:1 | |
| Lamp Hours | Normal/Eco: 5,000/10,000 Hours | |
| Lamp Type | 300W UHE | |
| Keystone Correction | Vertical: -30 to +30 degrees Horizontal: -30 to +30 degrees | |
| CONNECTIVITY | | |
| Input: Video | 1 x RCA (Yellow) | |
| Input: Computer | 2 x D-sub 15-Pin (RGB), 1 x USB 2.0 type B | |
| Input: USB Memory Device | 1 x USB Type A | |
| Input: Three-In-One USB Display | 1 x USB 2.0 type B | |
| Input: Digital | 2 x HDMI (1 x MHL) | |
| Input: Audio | 1 x RCA (Red/White), 2 x Stereo mini jack | |
| Input: Control | 1 x USB 2.0 type B, 1 x RS232C | |
| Input : HDBaseT | 1 x HDBaseT | |
| Input: Epson USB Document Camera | 1 x USB 2.0 type A | |
| Network I/O: | 1 x RJ45 (100Mbps) | |
| Wireless Connectivity | Included | |
| WiDI/Miracast | Included | |
| Output: Video | 1 x D-sub 15 pin (black moulding) | |
| Output: Audio | 1 x Stereo mini jack | |
| Speaker Output | 16W | |
| ADVANCED FEATURES | | |
| EasyMP Network & Control | Yes | |
| EasyMP Network Projection | Yes | |
| PC Free Presentations | Yes | |
| USB Plug 'n Play | Yes | |
| AV Mute Slide | Yes | |
| Instant Off | Yes | |
| Auto Power On | Yes | |
| Direct Power On/Off | Yes | |
| Security | Padlock & Security Cable Hole Kensington®-style lock provision Wireless LAN Unit Lock Password protect function | |
| Colour Modes | Dynamic, Presentation, Cinema, sRGB, Blackboard, DICOM SIM | |
| GENERAL | | |
| Dimensions D x W x H (excluding feet) | 291 x 377 x 110 mm | |
| Weight | 4.9kg (approximate) | |
| Compatible lamp model | ELPLP95 (New) | |
| Lamp Warranty | 12 months or 750 hours* | |
| Projector Warranty | 3 Years | |
| Power Consumption: Lamp on | Normal/Eco: 450/360W | |
| Power Consumption: Standby | 0.5W (communication off) | |
| Noise Level | Normal/Eco: 39/29dB | |
| * Which ever comes first. For more information visit Epson Projector Warranty | | |
| PRODUCT OPTIONS | Item Code | Description |
| | ELPLP95 Replacement Lamp | V13H010L95 |
| | ELPAF41 Replacement Air filter | V13H134A41 |
| | ELPMB23 Ceiling Mount (Standard) | V12H003B23 |
| | Extension Pole 668-918 mm | V12H003P13 |
| | Extension Pole 918-1,168 mm | V12H003P14 |
| | Soft Carrying Case – ELPKS68 | V12H001K68 |
| | ELPAP10 Wireless LAN Adapter | V12H731P01 |
| | ELPSC21B 80" Portable tripod screen | V12H002S2Y |
| Epson is the registered trademark of Seiko Epson Corporation. Epson ESC/P2 and Epson Stylus are trademarks of Seiko Epson Corporation. MicroDot is a trademark of Epson Australia Pty Limited. All other product names and other company names used herein are for identification purposes only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Specifications are subject to change without notice. | | |

Equipment supplied by Epson Australia is designed to function in conjunction with genuine Epson consumables and accessories specifically configured for it.

Usage Conditions

Epson products are designed and made to give highly reliable use and long life when used according to its specifications. With any system, product or device used in situations where human life may be involved or at risk, Epson advises that you should take all necessary steps to ensure the suitability of your Epson product for inclusion in your system, and recommends that you include fail-safe procedures and redundancy support or backup equipment in your system, to maintain the maximum safety margin and optimum system reliability. Examples include but are not limited to – do not interfere with any electrical components within the device, do not use items supplied with the product for purposes other than as intended by Epson (ie mains cords, inks, CDs, plastic wrapping) and do not make modifications to the product.

Consumables

| ACCESSORIES & OPTIONS | PRODUCT CODE |
|--|--------------|
| <u>Soft Carrying Case – ELPKS68</u> | V12H001K68 |
| <u>ELPSC21B 80" Portable Tripod Screen</u> | V12H002S2Y |
| <u>ELPPFP13 Extension Pole - 450mm</u> | V12H003P13 |
| <u>ELPPFP14 Extension Pole - 918mm to 1,168mm</u> | V12H003P14 |
| <u>ELPAP10 Wireless LAN Adapter</u> | V12H731P01 |
| <u>Replacement Lamp ELPPLP95</u> | V13H010L95 |

Epson is the registered trademark of Seiko Epson Corporation. Epson STYLUS, PerfectPicture, MicroPiezo, AcuPhoto Halftoning, QuickDry are the trademarks of Seiko Epson Corporation. All other names and company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. All print samples shown herein are imulations. Specifications are subject to change without notice.

HOME > PRODUCTS > PROJECTORS > **EPSON EB-2265U**

Copyright © 2011 Epson Australia Pty Ltd, Trading as Epson New Zealand. All rights reserved. EPN01.