


Mirror-a-rorriM™

Quick Release Mirror For CJs and Wranglers

This Mirror System is designed for some Jeep CJ7s and all Jeep Wranglers. With your Jeep's doors removed, the Mirror-a-rorriM provides an outside rearview mirror as required by federal law. The mirror consists of three parts: A stem, mirror head, and machined aluminum mounting mechanism.

TIGHTEN THREE SET
SCREWS TO FIRM BALL
MOUNT AND MIRROR

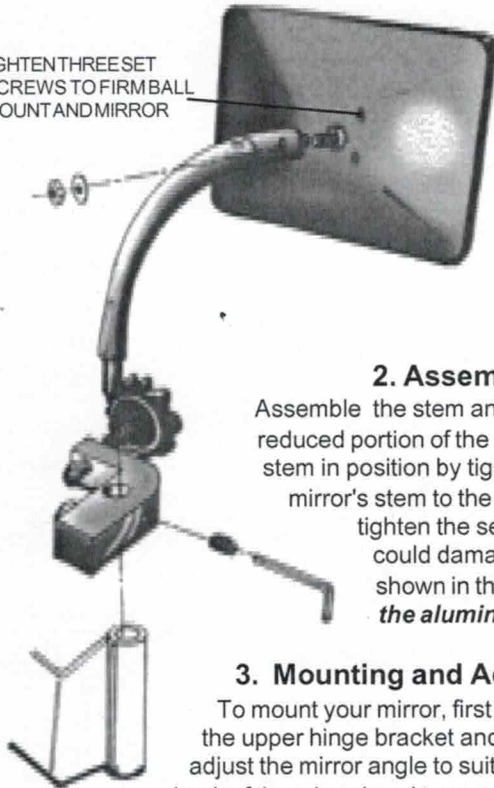

1. Inspection

Unwrap and inspect your mirror. Report any damage immediately to your shipper. Refunds on damaged mirrors or parts can only come from a written confirmation by the shipper. If you have problems, missing parts, warranty, or need technical do not call your retailer, call Lange at 801-262-7322 for prompt service.

2. Assembly

Assemble the stem and aluminum mount as shown in the figure above. Note that the reduced portion of the stem should protrude through the aluminum mount. Secure the stem in position by tightening the locking screw with the hex key provided. Adjust the mirror's stem to the angle most suited to your driving and mirror position. Do not over tighten the set screw since this will limit the break-away feature of the mirror and could damage the mirror head if bumped. Attach the mirror to the stem as shown in the drawing. **To setup the mirror for the left side, simply reverse the aluminum bracket before inserting the stem.**

3. Mounting and Adjustments

To mount your mirror, first remove your doors. Slip the bottom of the stem into the barrel of the upper hinge bracket and tighten the locking knob. After adjusting the angle of the stem, adjust the mirror angle to suit your driving position, tighten the three adjusting screws on the back of the mirror head to secure the mirror from excess vibration. If you have trouble because of a tight fit when mounting your mirror, you can sand or file the nylon standoff to give your mirror bracket more clearance.

Customer Satisfaction

Please call or write if you encounter problems or need assistance. Please call for a return authorization for items needing Warranty Service. The Warranty Period is based on proof of purchase. Items will be either repaired or replaced at Lange's option. Phone: 801-262-7322

Limited Warranty

This product is warranted for a period of one year. Soft rubber and plastic parts are warranted for 90 days. This warranty covers defects in material or workmanship and does not cover abuse, improper installation, or misuse. This Warranty is for the said product only and does not cover consequential damages of any kind due to the use of this product. Warranty service requires proof of purchase, and pre-approved return authorization with sent postage prepaid.

3651 South 700 East
Salt Lake City, Utah 84106
Phone - 801-262-7322
FAX - 801-262-5087
www.langeoriginals.com



LANGE
Originals

Helpful Hint:

If after adjusting your mirror, you still have some vibration, especially at high-speed, try mounting the mirror head so that the top-right corner touches the windshield frame. Some vibration with this mirror is unusual because of the type of mirror head mount. We have found that in most cases this is an easy and effective solution if you have this problem.