

CANDEX®

☎ 1(800) 223-3055

✉ info@candexlighting.com


Single-Pole / 3-Way

For Dimmable LED,
Incandescent, CFL,
& Halogen



Slider Dimmer Switch

M520138

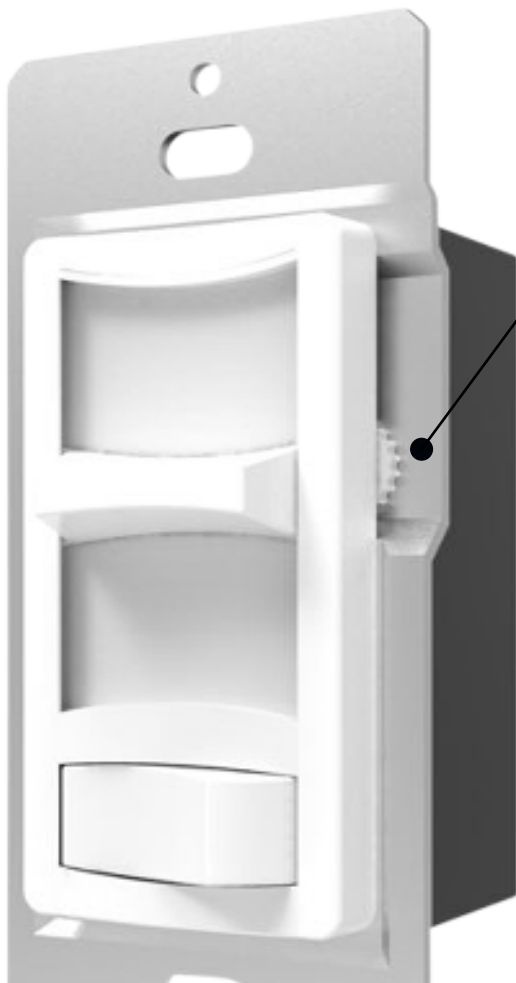

Featuring a flicker-free gear dial – Change light settings even at the lowest brightness or when experiencing unstable LED light.

APPLICATION NOTES

- Compatible with LED/CFL/Incandescent/Halogen **DIMMABLE** bulbs
- Full range dimming
- For residential and commercial use
- Indoor use only
- Recommended with any Candex dimmable bulb, fixture, and luminaire



Slider Dimmer Switch

Single-Pole / 3-Way

HARDWARE SPECIFICATION

- Designed for leading-edge Triac dimming
- Operation: Single Pole / 3-Way
- Load Rating:
 - » LED/CFL 3W ~ 200W
 - » Incandescent/Halogen 15W ~ 600W
- Center slider controls dimming and preset switch turns on/off
- Easy installation to replace existing (no neutral wire required)
- Overload and overheat protection
- Operating temperatures 32°F (0°C) to 104°F (40°C)
- Voltage – 120VAC, 50/60Hz
- Wall Plate – Included
- Wall Plate Color – Glossy White
- 4.7 x 2.9 x 1.29 inches with wall plate
- ETL Listed
- Featuring maximum light level modification for energy savings



MODEL	DIMMING	OPERATION	LOAD RATING	VOLTAGE	FREQUENCY	FINISH
M520138	Triac	Single Pole/3-Way	200W LED/CFL or 600W Incandescent/Halogen	120VAC	50/60Hz	White
WALLPLATE	ACTION PRESET	ACTION DIMMING	ACTION MINIMUM LIGHT	WARRANTY	PACKAGING TYPE	PACKAGING QUANTITY
Included	Standard ON/OFF	Slider	Side Dial	3-Year Limited	Peggable	1/100

UPC - 818564023706



ELECTRICAL WIRING DIAGRAMS

