

## WARRANTY INFO

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

La Crosse Technology, Ltd

2830 S. 26th St.

La Crosse, WI 54601

For Full Warranty Details, Visit: [www.lacrossetechnology.com/support](http://www.lacrossetechnology.com/support)

## CARE + MAINTENANCE

- Do not mix old and new batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- Remove batteries from equipment that will not to be used for an extended period.
- Promptly remove expired batteries.

## FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Increase separation between equipment & receiver.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

## CAUTION!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

**WARNING:** This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



LA CROSSE®  
TECHNOLOGY

# TEMPERATURE/HUMIDITY SENSOR



## New Swiss Sensor Technology


- Unrivalled Accuracy
- Power Conscious

Model: LTV-TH5i

DC: 072621

## POWER UP

Insert 2 “AA” batteries into the Battery Compartment.

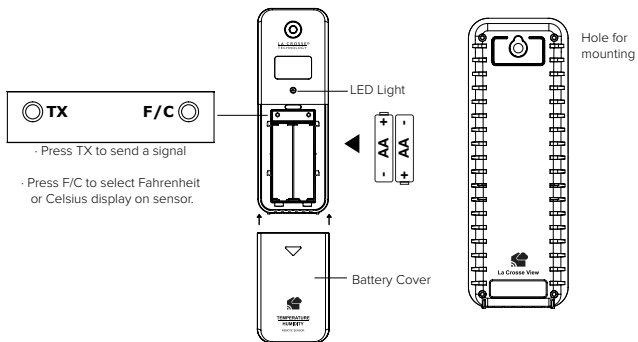

## MOUNTING


1. Use the hole at the top to hang your sensor from the back using a nail. Or, insert one mounting screw through the front of your sensor.
2. Mount your sensor on a north-facing wall or in any shaded area. Under an eave or deck rail is preferred to avoid inaccurate readings from the sun.
3. The maximum wireless transmission range to the weather station is up to 400 feet (121 meters) in open air, not including walls or floors.
4. Be sure your sensor is mounted vertically, to allow moisture to drain out properly.

**Note:** Watch sensor mounting video: [bit.ly/th\\_sensorsouting](https://bit.ly/th_sensorsouting)

## CONNECT TO LA CROSSE VIEW™ APP



If you already own a La Crosse View connected display, you can use your La Crosse View app to monitor your Rain Sensor's readings right on your phone.

1. Open your La Crosse View app and select ADD DEVICES from the main menu.
2. Scan the Bar Code or type in the Device ID on the side of the Battery Compartment. 
3. Give the device a Name and Location, and press Save. Within the next few minutes you should begin seeing your Sensor's data within your app.

## SPECIFICATIONS

Outdoor Temperature Range: -40°F to 140°F  
(-40°C to 60°C)

Outdoor Humidity Range: 10 to 99%RH

Transmission Range: 400 feet (121 Meters)

Power Requirements: 2 “AA” Batteries (not included)

Dimensions: 1.97 in. L x 0.75 in. W x 5.73 in. H  
(5.0 cm L x 1.91 cm W x 14.55 cm H)