




907xl

Stereo Audio Power Amplifier/Mixer (40 Watts per Channel)

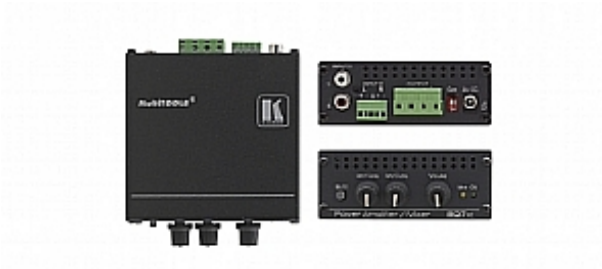

The **907xl** is a high-performance power amplifier for line-level stereo audio signals. It accepts a balanced stereo audio signal on a terminal block connector and an unbalanced stereo signal on RCA connectors. It delivers 40 watts per channel into an 8Ω load.

FEATURES

- High Efficiency - Class D operation.
- Controls - 1 volume control knob for each input & mute button.
- Gain Control DIP-Switches.
- Mute and On Indicator LEDs.
- Compact MultiTOOLS® - Up to 4 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 universal rack adapter.



907xl

TECHNICAL SPECIFICATIONS

INPUT:	1 balanced stereo audio on a terminal block connector, 1 unbalanced stereo audio on RCA connectors.
OUTPUT:	Speaker output on a terminal block connector.
OUTPUT POWER:	40W per channel into 8Ω.
OUTPUT MUSIC POWER:	150W per channel into 8Ω.
INPUT SENSITIVITY:	1.2Vrms.
AMPLIFIER TYPE:	Class D.
VOLTAGE GAIN:	36dB (x10).
BANDWIDTH (-3dB):	25kHz.
S/N RATIO:	66dB.
COUPLING:	Inputs: AC, Outputs: DC.
AUDIO THD + NOISE:	1.2%.
AUDIO 2nd HARMONIC:	1%.
POWER CONSUMPTION:	24V DC, 2.2A.
CONTROLS:	2 gain DIP-switches, mute button, 2 input level knobs, 1 volume knob.
OPERATING TEMPERATURE:	0° to +55°C (32° to 131°F).
STORAGE TEMPERATURE:	-45° to +72°C (-49° to 162°F).
HUMIDITY:	10% to 90%, RHL non-condensing.
DIMENSIONS:	10.7cm x 10.4cm x 4.0cm (4.2" x 4.1" x 1.6").
WEIGHT:	0.32kg (0.7lbs).
ACCESSORIES:	Power supply.
OPTIONS:	RK-1 19" rack mount adapter.

