Notes:

1. The installation instructions may be slightly different from the actual operation. If there is any difference, please contact us according to the actual situation.

2. Warning: Do not remove any parts by yourself. Any improper operation is not covered by the warranty.

3. Before installing the product, please turn off the vehicle power and cut off the battery negative pole of the frunk

4.Please watch the installation video and instructions before installation

Packing List



Installation Steps



1. At the bottom of the rear vent outlet, pry open and remove the plastic baffle




2. Use the prybar to pry open the air outlet of the original vehicle and take it down



3.Unplug the USB charging harness interface of the original vehicle air outlet, and remove the original vehicle air outlet



4. Take out the harness in the packaging box, put the black interface through the gap at the bottom left of the airoutlet, and pull it out from above

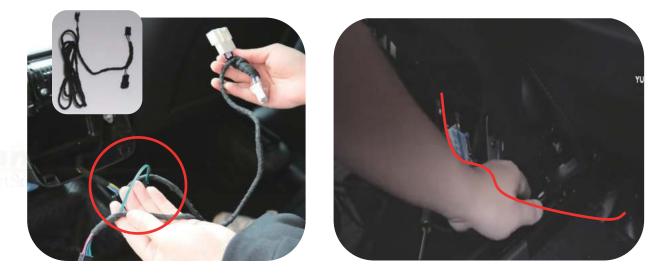

5. Connect the seat adjustment harness to the green plug, and then pull the harness to the passenger seat



6. At the rear side of the passenger seat, use the pry plate to pry off the seat adjustment baffle and pull off the plug, then connect with the green plug.

Model 3/Y Rear Control Touch Screen Installation Manual (7 inches)



7. Turn off the power on the main screen; Then unplug the blue CANbus harness of the original vehicle; Connect the white CANbus adapter plug; And then install the plastic baffle back to the orginal vehicle



8. Take out the screen in the packaging box and plug in the power cable and USB charging control cable of the screen respectively



9. Place the harnesses into the gap below the air outlet, and finally install the screen back to original position

Note: The original tesla screen need to connect the Bluetooth "BT966" or Bluetooth "BFD" to play through the original car.

Installation Steps - Model Y 2023/02+ Standard Range (Made in USA)



1. Remove this triangular trim panel



3. Remove this clip and take out the kick guard trim panel



2. Pull open the strip and remove this trim panel



4. Remove the passenger side lower cover (left side clip, right side screw)



5. After removing the clip, pull it to the left



6. Use a pry bar to open the center console side trim panel

Installation Steps - Model Y 2023/02+ Standard Range (Made in USA)




7. Remove the wireless charging plug



8. Connect the power cable adapter to the wireless charging plug




9. Connect the protocol cable to the blue plug on the right side of the passenger seat



10. Route the wiring along the edge of the lower cover panel




11. Lead the wiring from the lower cover panel to the center console




12. Run the power wire from the center console side position towards the rear


Installation Steps - Model Y 2023/02+ Standard Range (Made in USA)

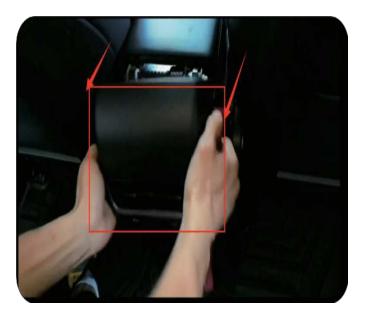

13. Remove the rear AC cover




14. After plugging in the dedicated plug for the Model Y, insert it into the air vent



15. Remove this kick guard trim panel



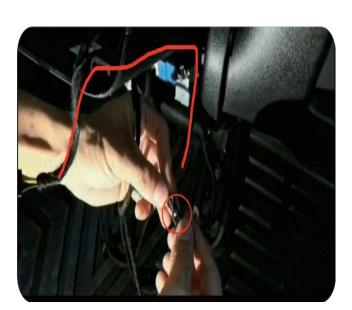

17. After connecting the harness, route the main harness from bottom to top for connection

16. Connect the seat adjustment harness and route the harness from the back of the seat



18. After connecting the power cable to the screen, restore the vehicle to its original state