


# ELDORADO XL

STUDIO RESERVE

**Northern**  
WIDE PLANK

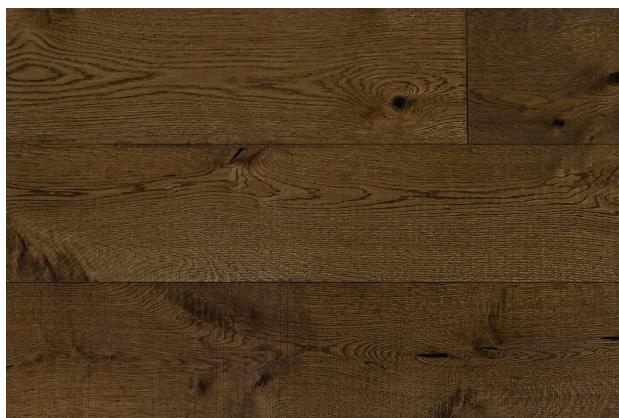

THE TOWN OF EL DORADO IS RESPLENDENT WITH PASTURES AND PINE FORESTS. WITH BANDSAW STRIATIONS AND HAND-FILLED KNOTTING, ELDORADO WHITE OAK PLANKS EXUDE THE SAME CHARACTER AS THEIR NAMESAKE—AND LIKE A FINE WHISKY, THESE RICHLY COLOURED PLANKS GET BETTER WITH AGE. TO STROLL ACROSS THE HAND-SANDED TEXTURE OF THESE FLOORS IS TO SENSE THE PASSAGE OF TIME.

## SPECIFICATIONS

MANUFACTURED:	MADE IN CANADA
WOOD ORIGIN:	NORTH EASTERN/CENTRAL USA
WOOD SPECIES:	WHITE OAK
TYPE:	ENGINEERED
GRADE:	CHARACTER
SHADE:	BROWN
SURFACE:	SHRUNK
EDGES:	MICROBEVELLED (PLANK - LONG SIDES ONLY)
THICKNESS:	20 MM (3/4")* WITH 6 MM WEAR LAYER.
CONSTRUCTION:	PURECRAFT 3-LAYER
FINISH:	HARDWAX OIL (UV CURED)
PLANK WIDTHS:	330 MM - 381 MM (13" - 15")
PLANK LENGTHS:	1525 MM - 3658 MM (60" - 144")
COLOUR VARIATION:	V2 - MODERATE VARIATION

## CERTIFICATIONS:



**Declare.**

FSC® AVAILABLE UPON REQUEST

## CLEANING AND CARE

Northern Wide Plank requires a relative humidity range of minimum 30%, maximum 65%, and a temperature range between 15°C (60°F) to 24°C (75°F)

Refer to NWP Cleaning & Care for Hardwax Oil finished wood floors for more info.

## TECHNICAL PERFORMANCE

ESSENTIAL CHARACTERISTICS	PERFORMANCE
Reaction to fire	ASTM E 648-17 Class II
Emission of Formaldehyde	E1 / CARB 2 compliant
Janka Hardness Rating	1,360 lbf (6,000 N)
Post Consumer Recycled Content %	NA

## INSTALLATION

TYPE	RECOMMENDATION
Full Glue Down	YES - RECOMMENDED
Nail Down	YES - WITH GLUE ASSIST
Floating	NOT RECOMMENDED
Over Underfloor Heating	YES - REFER TO NWP RADIANT HEAT GUIDE

APPLICATIONS: Floors

5930 LLOYDTOWN-AURORA ROAD, SCHOMBERG ON L0G 1T0 CANADA  
NORTHERNWIDEPLANK.CA 877/763/6169

Date: Apr 3, 2024