

**SHUTIt® BADASS™**



CI3000 ORIGINAL    CI3100 RUSTED ORIGINAL    CI3200 COMBO ALUMINUM/STEEL BODY    CI3300 COMBO STEEL/ALUMINUM BODY    CI3400 ALUMINUM    CI3500 HEAVY DUTY    CI3520 100 YEAR

CI3600 BABY    CI3620 RUSTED BABY    CI3650 ALUMINUM BABY    CI3670 COMBO BABY    CI3800 STAINLESS STEEL    CI3850 SELF-CLOSING HINGE


CODE	PRODUCT NAME	**GAP VARIANCE	FINISH	NO. OF SEALED BEARINGS	MAX GATE WEIGHT	MAX GATE LOAD	*YOKE MATERIAL	BODY MATERIAL	HEIGHT	WEIGHT
CI3000	Original BadAss™	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Zinc	2	1,100 lb (500kg)	2,000 lb (900kg)	Steel	Steel	3 <sup>1</sup> / <sub>16</sub> " (97mm)	2.5 lb (1.1kg)
CI3100	Original BadAss™ Rusted	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Unfinished	2	1,100 lb (500kg)	2,000 lb (900kg)	Steel	Steel	3 <sup>1</sup> / <sub>16</sub> " (97mm)	2.5 lb (1.1kg)
CI3200	Alum/Steel BadAss™ Combo	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Unfinished /Zinc	2	600 lb (270kg)	1,000 lb (450kg)	Alum	Steel	3 <sup>1</sup> / <sub>16</sub> " (97mm)	2.5 lb (1.1kg)
CI3300	Steel/Alum BadAss™ Combo	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Zinc / Unfinished	2	600 lb (270kg)	1,000 lb (450kg)	Steel	Aluminum	3 <sup>1</sup> / <sub>16</sub> " (97mm)	2 lb (1kg)
CI3400	Aluminum BadAss™	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Unfinished	2	600 lb (270kg)	1,000 lb (450kg)	Alum	Aluminum	3 <sup>1</sup> / <sub>16</sub> " (97mm)	2 lb (1kg)
CI3500	Heavy Duty BadAss™	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Zinc	3	1,500 lb (680kg)	3,000 lb (1,360kg)	Steel	Steel	3 <sup>1</sup> / <sub>16</sub> " (97mm)	3.5 lb (1.6kg)
CI3520	100 Year BadAss™	2 <sup>3</sup> / <sub>64</sub> "-3" (64-76mm)	Zinc	3	1,500 lb (680kg)	3,000 lb (1,360kg)	Steel	Steel	4 <sup>3</sup> / <sub>32</sub> " (104mm)	3.5 lb (1.6kg)
CI3600	Baby BadAss™	2 <sup>3</sup> / <sub>64</sub> "-3" (64-76mm)	Zinc	1	300 lb (140kg)	500 lb (230kg)	Steel	Steel	1 <sup>1</sup> / <sub>64</sub> " (33mm)	1 lb (0.5kg)
CI3620	Baby BadAss™ Rusted	2 <sup>3</sup> / <sub>64</sub> "-3" (64-76mm)	Unfinished	1	300 lb (140kg)	500 lb (230kg)	Steel	Steel	1 <sup>1</sup> / <sub>64</sub> " (33mm)	1 lb (0.5kg)
CI3650	Baby BadAss™ Aluminum	2 <sup>3</sup> / <sub>64</sub> "-3" (64-76mm)	Unfinished	1	300 lb (140kg)	500 lb (230kg)	Alum	Aluminum	1 <sup>1</sup> / <sub>64</sub> " (33mm)	0.5 lb (0.2kg)
CI3670	Baby BadAss™ Steel/Alum Combo	2 <sup>3</sup> / <sub>64</sub> "-3" (64-76mm)	Zinc / Unfinished	1	300 lb (140kg)	500 lb (230kg)	Steel	Aluminum	1 <sup>1</sup> / <sub>64</sub> " (33mm)	1 lb (0.5kg)
CI3800	Stainless Steel BadAss™ †	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Unfinished	2	1,100 lb (500kg)	2,000 lb (900kg)	Stainless	Stainless	3 <sup>1</sup> / <sub>16</sub> " (97mm)	2.5 lb (1.1kg)
CI3850	Self-closing BadAss™ Set † †	2 <sup>1</sup> / <sub>32</sub> "-2 <sup>2</sup> / <sub>32</sub> " (61-74mm)	Zinc	2/2	300 lb (140kg)	2,000 lb (900kg)	Steel	Steel	5" (127mm)	5.5 lb (2.5kg)

\* For welding yoke to round fence post, weld 1/2 x 1/2 x 1/8" (38x13x3mm) A36 steel bar channel to yoke first. After cooling, weld bar channel to fence post. Flat posts: fixed 2.75" (70mm). Round posts: min gap is 0.

\*\*Adjustable yoke for perfect installations. † All components, including the sealed bearings, are stainless steel.

† † Set comes with one self-closing hinge plus one CI3000.

Maximum gate weight 1,100 lb (500kg), but the maximum self-closing weight is 300 lb (140kg). All weight ratings are based upon two hinges.

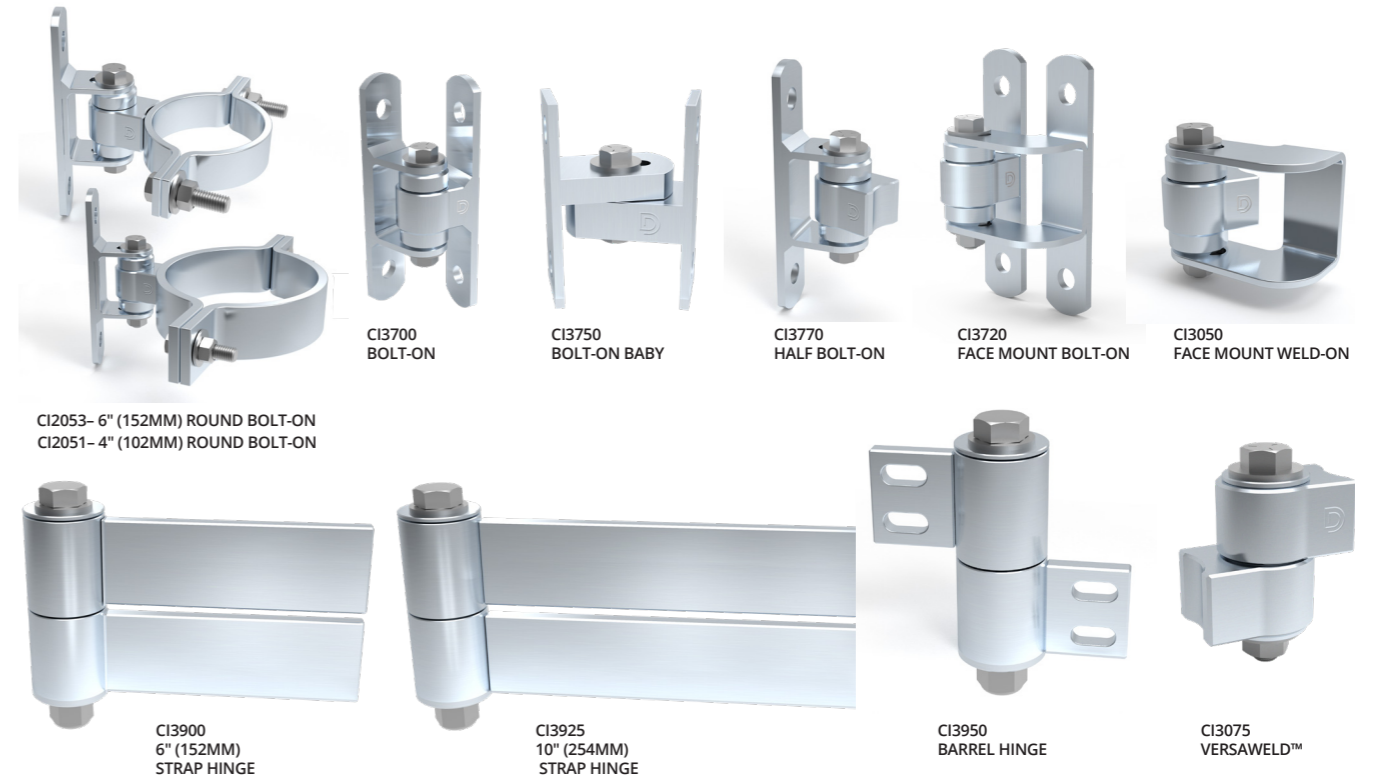

CI2053- 6" (152MM) ROUND BOLT-ON  
CI2051- 4" (102MM) ROUND BOLT-ON

CI3700 BOLT-ON    CI3750 BOLT-ON BABY    CI3770 HALF BOLT-ON    CI3720 FACE MOUNT BOLT-ON    CI3050 FACE MOUNT WELD-ON

CI3900 6" (152MM) STRAP HINGE    CI3925 10" (254MM) STRAP HINGE    CI3950 BARREL HINGE    CI3075 VERSAWELD™

CODE	PRODUCT NAME	**GAP VARIANCE	FINISH	# OF SEALED BEARINGS	MAX. GATE WEIGHT	MAX. GATE LOAD	YOKE MATERIAL	BODY MATERIAL	HEIGHT INCH/MM	WEIGHT LB/KG
CI2051	4" (102mm) Round Bolt-on BadAss™	2 <sup>2</sup> / <sub>32</sub> "-3 <sup>1</sup> / <sub>16</sub> " (69-81mm)	Zinc	2	1,000 lb (450kg)	2,000 lb (900kg)	Steel	Steel	7 <sup>3</sup> / <sub>64</sub> " (191mm)	5 lb (2.3kg)
CI2053	6" (152mm) Round Bolt-on BadAss™	2 <sup>2</sup> / <sub>32</sub> "-3 <sup>1</sup> / <sub>16</sub> " (69-81mm)	Zinc	2	1,000 lb (450kg)	2,000 lb (900kg)	Steel	Steel	7 <sup>3</sup> / <sub>64</sub> " (191mm)	10 lb (4.5kg)
CI2054	8" (203mm) Round Bolt-on BadAss™	2 <sup>2</sup> / <sub>32</sub> "-3 <sup>1</sup> / <sub>16</sub> " (69-81mm)	Zinc	2	1,000 lb (450kg)	2,000 lb (900kg)	Steel	Steel	7 <sup>3</sup> / <sub>64</sub> " (191mm)	15 lb (6.8kg)
CI3700	Bolt-on BadAss™	2 <sup>2</sup> / <sub>32</sub> "-3 <sup>2</sup> / <sub>64</sub> " (74-86mm)	Zinc	2	1,000 lb (450kg)	2,000 lb (900kg)	Steel	Steel	7 <sup>3</sup> / <sub>64</sub> " (191mm)	3.5 lb (1.6kg)
CI3750	Baby Bolt-on BadAss™	3-3 <sup>1</sup> / <sub>2</sub> " (76-89mm)	Zinc	1	250 lb (110kg)	600 lb (270kg)	Steel	Steel	4" (102mm)	2.0 lb (1kg)
CI3770	Half Bolt-on BadAss™	2 <sup>4</sup> / <sub>64</sub> "-3 <sup>5</sup> / <sub>32</sub> " (67-80mm)	Zinc	2	1,000 lb (450kg)	2,000 lb (900kg)	Steel	Steel	7 <sup>3</sup> / <sub>64</sub> " (191mm)	2.5 lb (1.1kg)
CI3780	Steel/Aluminum Half Bolt-On	2 <sup>4</sup> / <sub>64</sub> "-3 <sup>5</sup> / <sub>32</sub> " (67-80mm)	Zinc	2	600 lb (270kg)	1000 lb (450kg)	Steel	Aluminum	7 <sup>3</sup> / <sub>64</sub> " (191mm)	2.4 lb (1.1kg)
CI3720	Face Mount Bolt-on BadAss™	1/2"-1" (13-25mm)	Zinc	2	1,100 lb (500kg)	2,000 lb (900kg)	Steel	Steel	7 <sup>3</sup> / <sub>64</sub> " (191mm)	3.8 lb (1.7kg)
CI3050	Face Mount Weld-on BadAss™	1/2"-1" (13-25mm)	Zinc	2	1,100 lb (500kg)	2,000 lb (900kg)	Steel	Steel	3 <sup>5</sup> / <sub>64</sub> " (98mm)	1.8 lb (0.8kg)
CI3900	6" (152mm) Strap Hinge	Fixed 1/2" (13mm)	Zinc	4	1,500 lb (680kg)	3,000 lb (1,360kg)	Steel	Steel	5 <sup>2</sup> / <sub>32</sub> " (150mm)	6 lb (2.7kg)
CI3925	10" (254mm) Strap Hinge	Fixed 1/2" (13mm)	Zinc	4	1,500 lb (680kg)	3,000 lb (1,360kg)	Steel	Steel	5 <sup>2</sup> / <sub>32</sub> " (150mm)	7.5 lb (3.4kg)
CI3975	Uphill Strap Hinge Set*	Fixed 1/2" (13mm)	Zinc	4/4	1,500 lb (680kg)	3,000 lb (1,360kg)	Steel	Steel	5 <sup>2</sup> / <sub>32</sub> " (150mm)	13.5 lb (6.1kg)
CI3950	Barrel Hinge	Fixed 1/2" (13mm)	Zinc	4	1,500 lb (680kg)	3,000 lb (1,360kg)	Steel	Steel	5 <sup>2</sup> / <sub>32</sub> " (150mm)	4.0 lb (1.8kg)
CI3075	VersaWeld™ BadAss™	Fixed 2 <sup>3</sup> / <sub>4</sub> " (70mm)	Zinc	2	1,100 lb (500kg)	2,000 lb (900kg)	Steel	Steel	3 <sup>4</sup> / <sub>64</sub> " (95mm)	2.2 lb (1.0kg)

\* For welding yoke to round fence post, weld 1/2 x 1/2 x 1/8" (38x13x3mm) A36 steel bar channel to yoke first. After cooling, weld bar channel to fence post. Flat posts: fixed 2.75" (70mm). Round posts: min gap is 0.

\*\*Adjustable yoke for perfect installations. † All components, including the sealed bearings, are stainless steel.

† † Set comes with one self-closing hinge plus one CI3000.

Maximum gate weight 1,100 lb (500kg), but the maximum self-closing weight is 300 lb (140kg). All weight ratings are based upon two hinges.