



Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

## Glo-Ray® Carving Stations

Models: GRCSCL-24  
GRCSCLH-24

The Glo-Ray® Carving Station is an excellent addition to extend food holding times during serving periods. Create a complete serving station for buffets by adding it to Hatco's Flav-R-Savor® Holding Cabinet.

### Standard features

- Overhead ceramic heating elements project high intensity radiant heat over entire target area
- Available with or without heated base
- Independent controls define temperature settings for the ceramic element top heat and the blanket element base heat (GRCSCLH-24 only)
- Shatter-resistant incandescent lights
- Sturdy right-hand side sneeze guard
- Adjustable clearance of 17" to 23" (445 to 570 mm) from the top of the base to the bottom of the foodwarmer housing
- Portable – includes a 72" (1829 mm) cord and plug
- Cord location is back side on base
- Ceramic and blanket heating elements guaranteed against burnout and breakage for one year



### Options (available at time of purchase)

- Halogen Bulb in lieu of standard Display Light (available for U.S./Canada only)

### Accessories

- Left-Hand Sneeze Guard Kit, 3 lbs. (1 kg)
- Stainless Steel Custom Drip Pan  
20" x 26.75" x 1" (508 x 680 x 25 mm), 9 lbs. (4 kg)
- Approved Foodsafe Cutting Board  
18" x 24" x 1.75" (457 x 610 x 45 mm), 19 lbs. (9 kg)

For operation, location and safety information, please refer to the Installation & Operating Manual.




**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
 (800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com



# Glo-Ray® Carving Stations

Models: GRCSCL-24, GRCSCLH-24

## Glo-Ray® Carving Stations

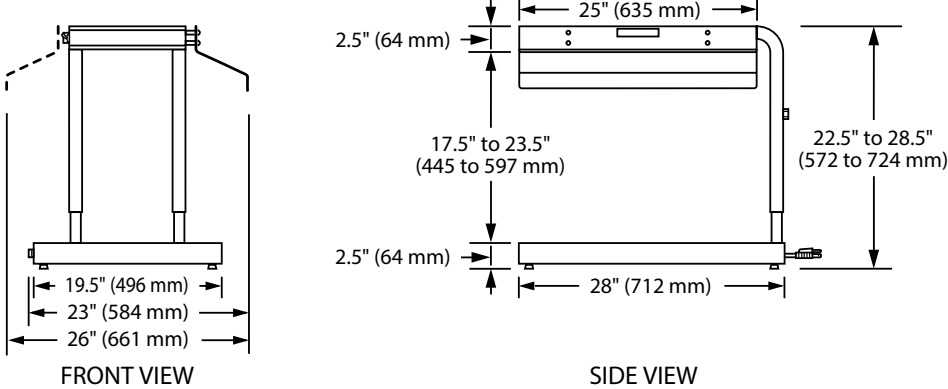

## SPECIFICATIONS

### Glo-Ray® Carving Stations

■ The shaded areas contain electrical information for International models only

Model	Dimensions (Width x Depth x Height)	Voltage	Phase	Watts	Amps	Plug	Ship Weight*
GRCSCL-24	26" (including left- and right-hand sneeze guards) x 28" x 22.5"-28.5" (661 x 712 x 572-724 mm)	120	Single	990	8.3	NEMA 5-15P	57 lbs. (26 kg)
		100	Single	778	7.8	NEMA 5-15P	
		220		1040	4.7	CEE 7/7 Schuko	
		240		990	4.1	BS-1363	
		220-230 (CE)		1041-1137	4.7-5.0	CEE 7/7 Schuko	
230-240 (CE)		909-990		4.0-4.1	BS-1363		
GRCSCLH-24†		120	Single	1290	10.8	NEMA 5-15P	57 lbs. (26 kg)
		220	Single	1316	6.0	CEE 7/7 Schuko	
		240		1314	5.5	BS-1363	
		220-230 (CE)		1316-1438	6.0-6.3	CEE 7/7 Schuko	
	230-240 (CE)	1208-1316		5.3-5.5	BS-1363		


† "H" model indicates heated base.

\* Shipping weight includes packaging.

## CORD LOCATION

Back side on base.

## PLUG CONFIGURATIONS

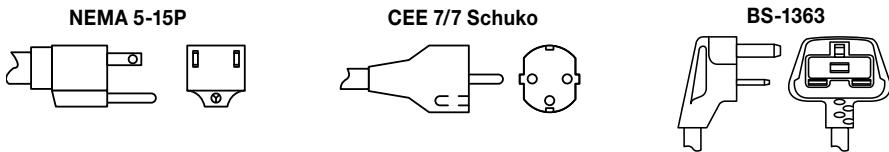

## PRODUCT SPECS

### Glo-Ray® Carving Stations

The Infrared Foodwarmer shall be a Glo-Ray® manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be rated at ... watts, ... volts, single phase, and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of ceramic heating elements, incandescent lights, and sneeze guard.

The foodwarmer shall be factory-assembled ready for electrical installation.

Accessories shall include left-hand sneeze guard kit, stainless steel custom drip pan, and approved foodsafe cutting board.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
 (800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com