Domestic Pressure Systems







This electronic pressure-flow-regulator starts and stops the pump to which it is fitted. It substitutes

offering several advantages such as: flow control,

pump protection and reduced dimensions.

Dry run protection

Pressure and flow

sensor

traditional pressure switch / surge tank systems while

Featuring modern, high efficiency Lowara pumps manufactured to the highest standards, our pressure systems deliver efficient and powerful performance to match any domestic water requirement.

They are assembled, tested and ready to install.

Features

- Advanced design and materials
- Easily installed
- Highly corrosion resistant
- Quiet, compact and efficient
- 2 year warranty

Applications

- Domestic water pressure systems
- Residential and commercial buildings
- Water supply
- Irrigation
- Pressure boosting



These systems can be used with the AcquaSaver water diversion valve.

PRESFLO MULTI

Electronic controller for simple control of domestic pumps. The electronic pressure-flow regulator monitors the pressure and flow rate within the system to protect and control the pump.

- Dry run protection
- Overload protection
- Auto reset
- Surge tank 3 litre
- Digital pressure and flow indicator
- Adjustable start pressure Built in non-return valve

PRESSURE SWITCH & TANK

In the pressure tank system, the tank holds a reserve of water. When the reserve has been used, the switch detects a pressure drop and starts the pump. Simple and reliable method for controlling a pressure pump system with:

- 18 litre tank
- Pressure switch
- Includes non-return valve

Pressure gauge

Built in non-return valve


Auto reset





e-HM - P SERIES

Model	Power	Flow Range	Pressure Range	Number of Oulets
3HM04P	0.55 kW	20 - 70 l/min	410 - 170 KPa	エエエエ
3HM05P	0.75 kW	20 - 70 l/min	560 - 280 KPa	4444
3HM06P	0.95 kW	20 - 70 l/min	680 - 330 KPa	4444
5HM04P	0.75 kW	40 - 120 l/min	430 - 180 KPa	44444
5HM05P	0.95 kW	40 - 120 l/min	530 - 210 KPa	444444
5HM06P	1.10 kW	40 - 120 l/min	640 - 260 KPa	444444

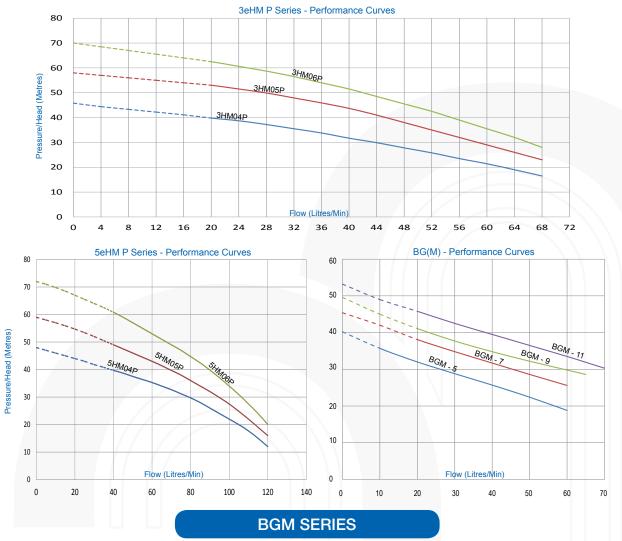

Model	Power	Flow Range	Pressure Range	Number of Oulets
BGM-5	0.55 kW / 0.75 Hp	10 - 60 l/min	350 - 170 KPa	エエエエ
BGM-7	0.75 kW / 1.0 Hp	20 - 60 l/min	380 - 250 KPa	4444
BGM-9	0.90 kW / 1.2 Hp	20 - 65 l/min	400 - 270 KPa	4444
BGM-11	1.10 kW / 1.5 Hp	20 - 70 l/min	450 - 300 KPa	44444



Melbourne (03) 9793 9999 Sydney (02) 9671 3666 Brisbane (07) 3200 6488 www.brownbros.com.au Dealer Details