


TRITON

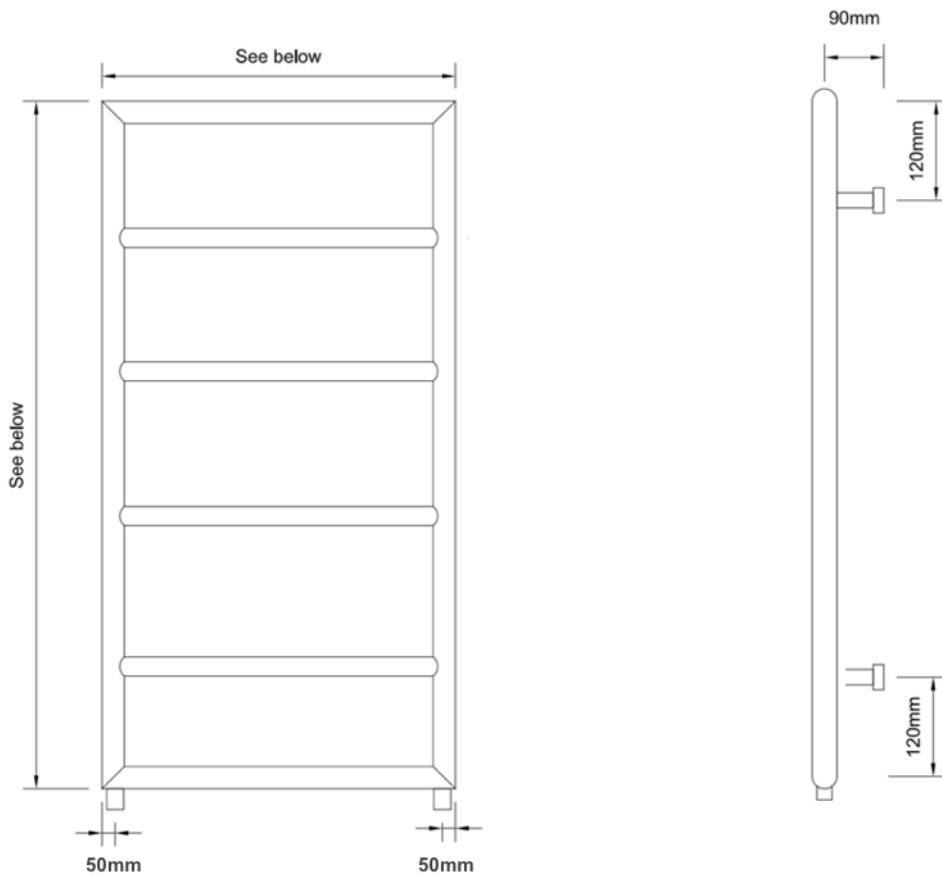

Test pressure: 8 BAR

Max. working pressure: 5 BAR

Max working temperature: 100°C

Material: 50mm horizontal cross tubes, 25mm vertical tubes from DZR Brass.

Connections: ½ inch BSP tapping's

Joints: Hand silver soldered

Finish: Hand polished, plated to British Standards

Leak Tested: Twice

Heat output determined in accordance with EN 442

Manufactured by Rutland Radiators in Hampshire, England.

Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464

www.rutland-radiators.co.uk

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of +/- 3mm

RUTLAND RADIATORS – TECHNICAL SPECIFICATION

Triton

Dimensions (mm) (HxWxD):	Pipe Centres (mm):	Pipe Centres from Wall (mm):	No. of Horizontal Bars:	BTU's:	Watts:
750 x 300 x 106	200	90	4	580	170
750 x 400 x 106	300	90	4	630	184
750 x 500 x 106	400	90	4	680	199
750 x 600 x 106	500	90	4	735	215
1000 x 300 x 106	200	90	5	665	195
1000 x 400 x 106	300	90	5	720	211
1000 x 500 x 106	400	90	5	777	228
1000 x 600 x 106	500	90	5	840	246
1200 x 300 x 106	200	90	5	772	226
1200 x 400 x 106	300	90	5	840	246
1200 x 500 x 106	400	90	5	920	269
1200 x 600 x 106	500	90	5	990	290
1500 x 300 x 106	200	90	6	1070	313
1500 x 400 x 106	300	90	6	1170	343
1500 x 500 x 106	400	90	6	1280	375
1500 x 600 x 106	500	90	6	1360	398

Please note, all designs can be adapted to individual requests, please call 01252 790464 to discuss your requirements with our design team.

Included:

4 x 50mm Steel Crosshead screws
 4 x Rawl plugs
 4 x Washers
 1 x Allen key

Valves and tails available from www.rutland-radiators.co.uk at an additional cost.

Cleaning Instructions:

Please ensure you visit the Rutland Radiators website prior to undertaking any cleaning of the towel warmer.

Always avoid chemicals and abrasive cloths/pads.

Installation:

We always advise that our products are installed by a competent and experienced professional or tradesperson.

This towel warmer can be supplied to fit:

**Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464
www.rutland-radiators.co.uk**

**Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.
 Drawings and dimensions are supplied to a tolerance of +/- 3mm**

RUTLAND RADIATORS – TECHNICAL SPECIFICATION

- Central Heating Systems
- Hot Water Systems
- Dual Fuel Systems
- Electric only option

Please confirm with your installer/contractor that there is not a water softener on the system prior to installation.

**Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464
www.rutland-radiators.co.uk**

**Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.
Drawings and dimensions are supplied to a tolerance of +/- 3mm**