


WESTCROFT WALL MOUNTED

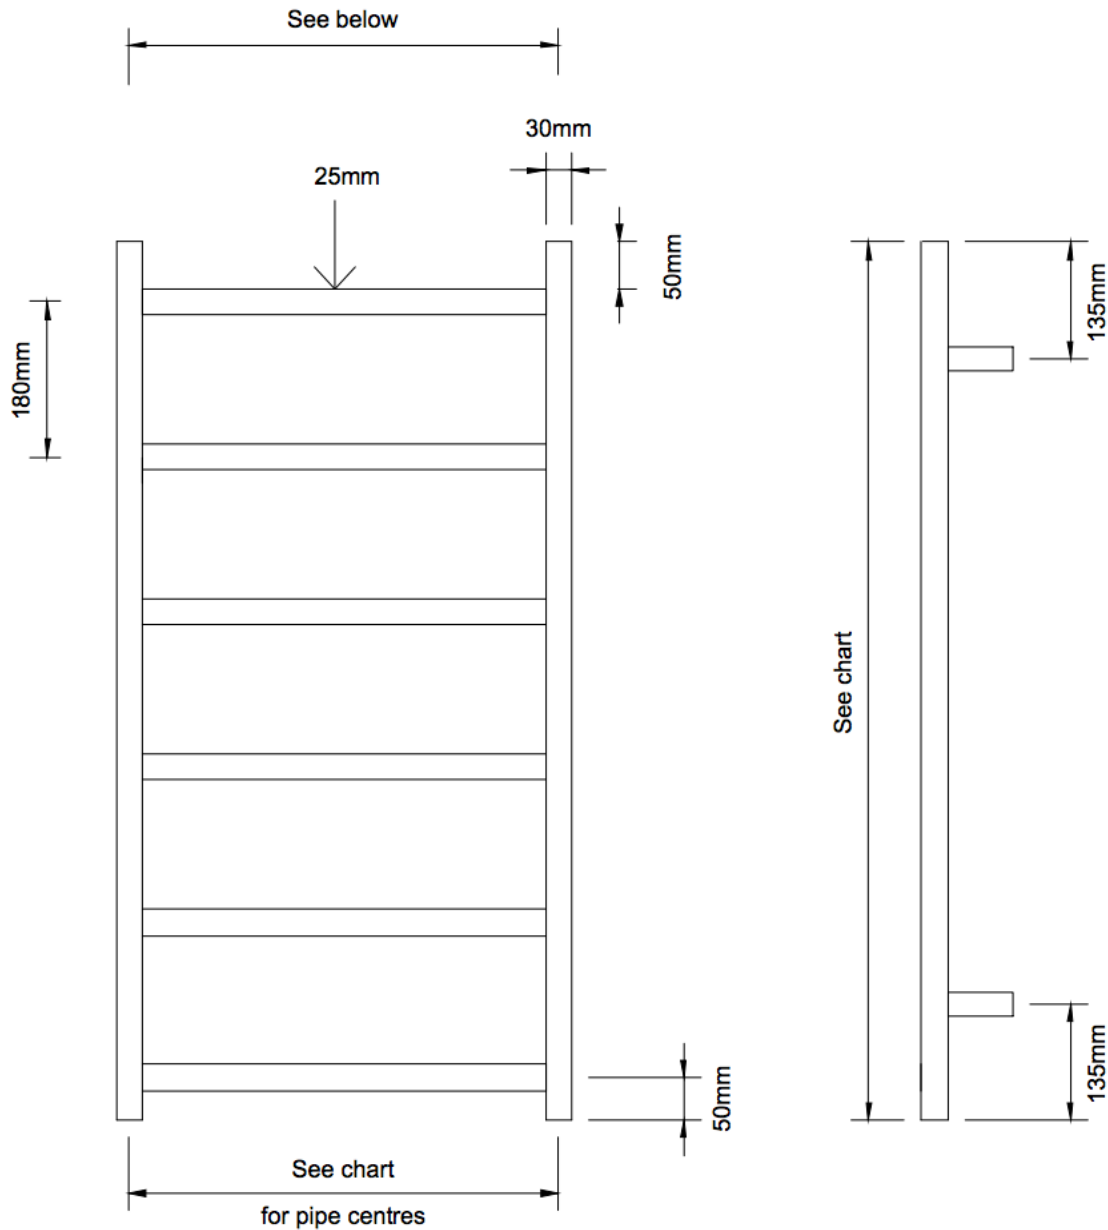

Test pressure: 8 BAR

Max. working pressure: 5 BAR

Max working temperature: 100°C

Material: 30mm/25mm EN 316 Stainless Steel

Connections: ½ inch BSP tapping's

Joints: Hand silver soldered

Finish: Hand polished, plated to British Standards

Leak Tested: Twice

Heat output determined in accordance with EN 442

Manufactured by Rutland Radiators in Hampshire, England.

Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of +/- 3mm

RUTLAND RADIATORS – TECHNICAL SPECIFICATION

WESTCROFT

Dimensions (mm) (HxWxD)	Pipe Centres (mm)	Distance off wall (mm)	BTU's	Watts
800 x 500 x 100	470	100	1502	440
1000 x 500 x 100	470	100	1963	575
1200 x 500 x 100	470	100	2389	700
1500 x 500 x 100	470	100	3175	930

Please note, all designs can be adapted to individual requests, please call 01252 790464 to discuss your requirements with our design team.

Included:

4 x Stainless Steel screws
4 x Rall plugs
4 x Washers
1 x Allen key

Valves and tails available from www.rutland-radiators.co.uk at an additional cost.

Cleaning Instructions:

Please ensure you visit the Rutland Radiators website prior to undertaking any cleaning of the towel warmer.

Always avoid chemicals and abrasive cloths/pads.

Installation:

We always advise that our products are installed by a competent and experienced professional or tradesperson.

This towel warmers can be supplied to fit:

- Central Heating Systems
- Hot Water Systems
- Dual Fuel Systems
- Electric only option

Please confirm with your installer/contractor that there is not a water softener on the system prior to installation.