specifications


Refrigeration

RF7.UPF.2.SD

ReFlex Series, 2 Door (Solid), Upright Freezer (R290)

Project:

Item No:

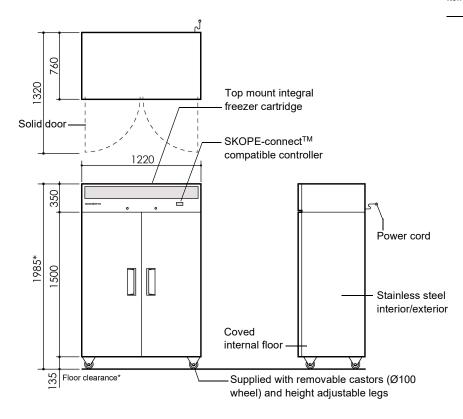

CABINET

Doors 2 × self-closing, lockable, solid swing doors. LH, RH Internal door opening 2 × door openings: 1375mm high × 495mm wide

Shelves 10 × adjustable height shelves: 530mm wide × 530mm deep

Worktop n.a

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

GEMS class 5L

GEMS energy consumption | 10.64 kWh/24h

GEMS annual running cost \$1165 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class | 5

Interior lighting

Power cord

Power supply

Current draw

2 × 1200mm, 12W LED light (door activated)

Supplied with 2.9m, 10 Amp plug and lead

220-240 Volts a.c. 50 Hz, single phase supply

5.0 Amps (includes unit 4.6 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology

UTKDNI-0037)

Refrigerant R290 / 105g (natural refrigerant)

Nominal capacity 725 Watts

Heat rejection (Avg/peak) 450 Watts/725 Watts
Drainage No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2020\ SKOPE\ Industries\ Limited\ properties and the properties of the properti$

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com

DIMENSIONS

External	Internal
1985mm*	1395mm
1220mm	1100mm
760mm	600mm
0.93m ²	•
171kg	
921L	
712L	
	1985mm* 1220mm 760mm 0.93m ² 171kg 921L

^{*} With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet di	mensions	
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0679 Rev. 1.4 Aug. 2020



