

# UDA515-1

Family	Dishwasher
Subfamily	Undercounter Dishwasher
Basket dimensions	500x500 mm
Panel	Easyline 2016
Filter	5-stages filter system
Rinse pump H.T.R. system	Rinse pump with atmospheric boiler
Simultaneous heating	Yes
Usable load height	415 mm
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Depth with open door	1020 mm
Product dimensions WxDxH	600x600x820 mm



## Aesthetics

Control panel	Electronic	Led color	Green
---------------	------------	-----------	-------

## Functions



Functionality	GN 1/1 trays washing; 5-stage filter; HTR; Door clearance 415mm
---------------	---

## Programs

Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 85°C/Tank 60°C-60"; Boiler 71°C/Tank 60°C-1'20"; Boiler 85°C/Tank 60°C-1'10"; Boiler 85°C/Tank 60°C-1'30"; Boiler 85°C/Tank 60°C-3'; Boiler 71°C/Tank 60°C-2'10"; Boiler 85°C/Tank 60°C-4'10"
Drain and self cleaning cycle	Yes
Maximum basket/hour	51
Maximum dishes/hour	918

## Interface

Display	8 digit	Detergent missing alert	Yes
Number of buttons	5	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes

## Construction

Tank Construction	Deep drawn Double wall	Rinse spray arm	Stainless steel
Tank material	Stainless steel AISI 304	Door gasket	On 3 sides
Back panel	Galvanized	Rack guides	Embossed
Door	Double wall	Tank capacity	11 l
Balanced door	Yes	Boiler capacity	6 l
Tank filter	Stainless steel	Adjustable feet	Yes
Washing spray arm	Stainless steel	Net weight	60,000 kg
		Drain max. height	600 mm

## Technical Features

Tank heating element	2000 W	Water inlet	8°C
Boiler heating element	6100 W	Max temperature inlet water	60°C
Washing pump	700 W	Max water hardness	12°f - 7°dH
Default connection	7300 W	Water inlet	Cold 15°C
Water cycle consumption	3,2 l		

## Electrical Connection

Electrical connection option	230 V 3~ / 15 A / 5,2 kW / 50 Hz; 220 V~ / 12 A / 2,7 kW / 50 Hz; 230 V~ / 13 A / 2,9 kW / 50 Hz; 230 V~ / 17 A / 3,7 kW / 50 Hz
------------------------------	--

## Equipments

Drain pump	Yes	Break tank	Yes
Peristaltic detergent doser	Yes, electronic control	Partial renewal of water in the tank and built-in drain pump	Si
Peristaltic rinse-aid doser	Yes, electronic control	Trays washing option GN1/1 530x325mm	Yes
Chemicals level probe	Yes, optional KITSONLIV	Water supply pipe diameter	16 mm
Default chemicals dosing unit of measure	gr/lt	Drain supply pipe diameter	21,5 mm
Boiler thermostop	Yes default ON	Peristaltic detergent doser	Yes, manual
Stand-by system	Yes	Peristaltic detergent doser	Yes, manual
Automatic start	Yes, default OFF		

## Accessories Included



Dish basket	PB50D01	Water supply pipe	Yes - 2m
-------------	---------	-------------------	----------

Cutlery basket  
Flat basket

PHOOS02  
1x PB50G02

Drain pipe

Yes - 2m

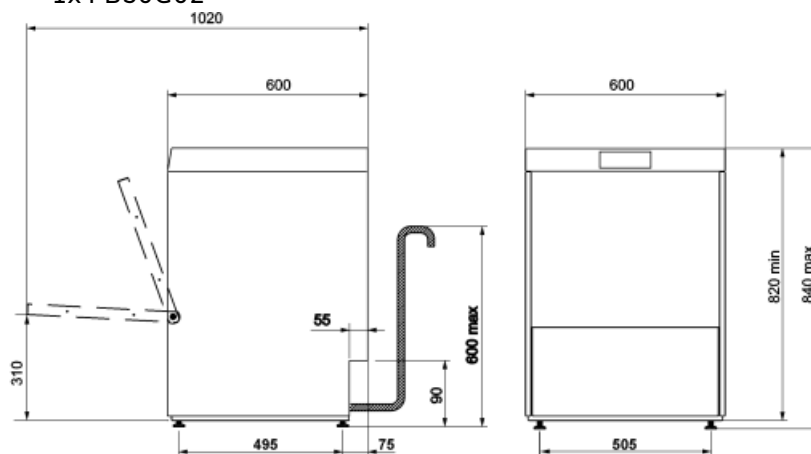

<b>R</b>	PANNELLO RETRO LOWER BACK PANEL
<b>Q</b>	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
<b>P</b>	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
<b>E</b>	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
<b>S</b>	TUBO DI SCARICO DRAIN HOSE
<b>T</b>	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
<b>C</b>	TUBO DI CARICO FILLER HOSE

## Not included accessories



**KITSONLIV**  
Probe level kit



**WH00S01**  
Wire insert for 12 small dishes



**PHOOS01**  
Single basket in polypropylene for cutlery



**WB50T02**  
Wire basket for 5 trays 600x500




**WB50G01**  
Universal wire basket with flat bottom 500x500



**WB50G02**  
Wire basket for glasses with inclined bottom 500x500



**KITDETKCC500**  
Kit for detergent (1l) and rinse storage (1l) for dishwashers 500x500



**PB50G01**  
Universal basket in polypropylene 500x500



**WB50G04**  
Wire basket for glasses with inclined bottom 500x500



**PHOOS02**  
Basket in polypropylene for cutlery with 6 compartments



**WB50G03**  
Wire basket for glasses with inclined bottom 500x500



**WS5**  
Underframe for glasswashers 500mm

## Symbols glossary (TT)

---

