

LED READY FIXTURES SINGLE END OR DOUBLE END WIRING

INSTALL INSTRUCTIONS

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

WARNING, CAUTIONS AND OPERATING INSTRUCTIONS

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY


- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

! WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

GENERAL FIXTURE WIRING - Always refer to Install instructions that are provided with the direct-wire LED lamp being used in the fixture for specific wiring instructions.

Single-End lamps (Typical) - Connect power input wires to the one end only that will power the lamps (Side "A" in Fig. 1). Connect Black to LINE, White to NEUTRAL, and Green Fixture Ground to GROUND.. DO NOT hook up wires in the fixture going to Side "B" of the lamps. Use only UL-approved wire and connectors.

FIG. 1 - Single Ended Wiring (Non-Shunted)

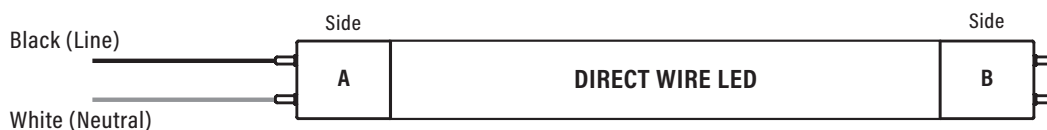

Double-End lamps (Typical) - Tie wires together on the one end of the fixture that corresponds to the L-side of the Double-End lamp being used (Side "A" in Fig. 2), and connect those wires to the LINE. Tie wires together on the opposite end of the fixture (Side "B" in Fig. 2 that corresponds to the N-side of the Double-End lamp being used), and connect those wires to NEUTRAL. Connect Green Fixture Ground to GROUND. Use only UL-approved wire and connectors.

FIG. 2 - Double Ended Wiring (Non-Shunted)



MOUNTING OPTION:

STRIPS - SURFACE MOUNT: Secure fixture to mounting surface by inserting anchor screws, toggle bolts or suitable fasteners (not provided), depending on structural conditions into key hole slots on the top side of the fixture.