

SELECTABLE WATTAGE & CCT INTEGRATED SENSOR OPTION

Item#: 26755 LED 4' SPEC-SELECT™ DESIGNER STRIP DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

Spec-Select[™] Designer Strips are like 9 fixtures in 1, featuring adjustable wattage and color temperature for the perfect balance of light in any application.

- Adjustable Wattage (3 settings)
- Adjustable Color (3 settings)
- Integrated Sensor Option (ISO). Sensor and elbow sold separately.
- · Easy installation.

APPLICATION

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

Voltago	120 211 1	
Current	30W @ 120V = 0.25A	
Power Factor	0.9	
Total Harmonic Distortion (THD)	12.7	
LIGHTING PERFORMANCE		
Lumens	2376 / 3300 / 3960	
Lumens Per Watt (LPW)	132	
Color Temperature (CCT)	3500K / 4100K / 5000K	
Color Rendering (CRI)	82	
R9 (Red Value)	5	
Beam Angle	130°	
Light Distribution	Type II, Very Short	
BUG Rating (Backlight, Uplight, and Glare)	B1 - U3 - G2	
Dimmable Lighting Control	From optional 12VDC sensor, or customer 0-10V controls.	
ENVIRONMENT		
Operating Temperature	-4 ~ 122°F	
Suitable Location	DAMP	
Ingress Protection Rating	IP40	
LIFESPAN		
Average Life (Hours)	50,000	
Warranty (Years)	5	
COMPONENTS		
LED Light Source	Bridgelux	
Driver	SIF30-I0650-SS	
Sensor Socket	12VDC AUX.	
CONSTRUCTION		
Housing	Aluminum	
Lens	Frosted	
Base / Power Supply	Hard Wired	
Finish	White	

QUALIFICATIONS



Visit www.designlights.org/search to confirm qualification. • *Published lumens on LED products are approximate and may vary slightly.* • *Specifications are subject to change without notice.*

Photos and drawings may not be to scale and are for general reference only. Rev: 09/13/2023


Wattage

Voltage

18W / 25W / 30W

120-277V

Item#: 26755 LED 4' SPEC-SELECT™ DESIGNER STRIP

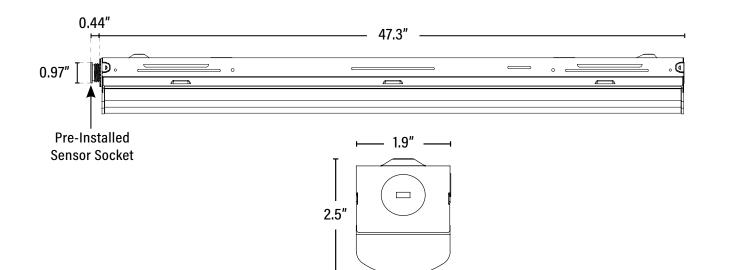

DIMENSIONS (Inches)

Length	47.3"	
Length Width	1.9"	
Height	2.5"	
Net Weight (Lbs)		

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10811768028840	49.3" x 7.2" x 8.7"	
Individual Box	1	811768028843	48.6" x 2.2" x 2.7"	
Country of Origin	China			
HS Tariff				

ADDITIONAL INFORMATION:

- Default settings; 18W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. For additional information refer to the install instructions.

