

# CC6561GK Gas Walk Behind Saw




Gasoline  
Powered

## POWER, RELIABILITY & CONVENIENCE

14"-42" Blade Capacity

Self-Propelled

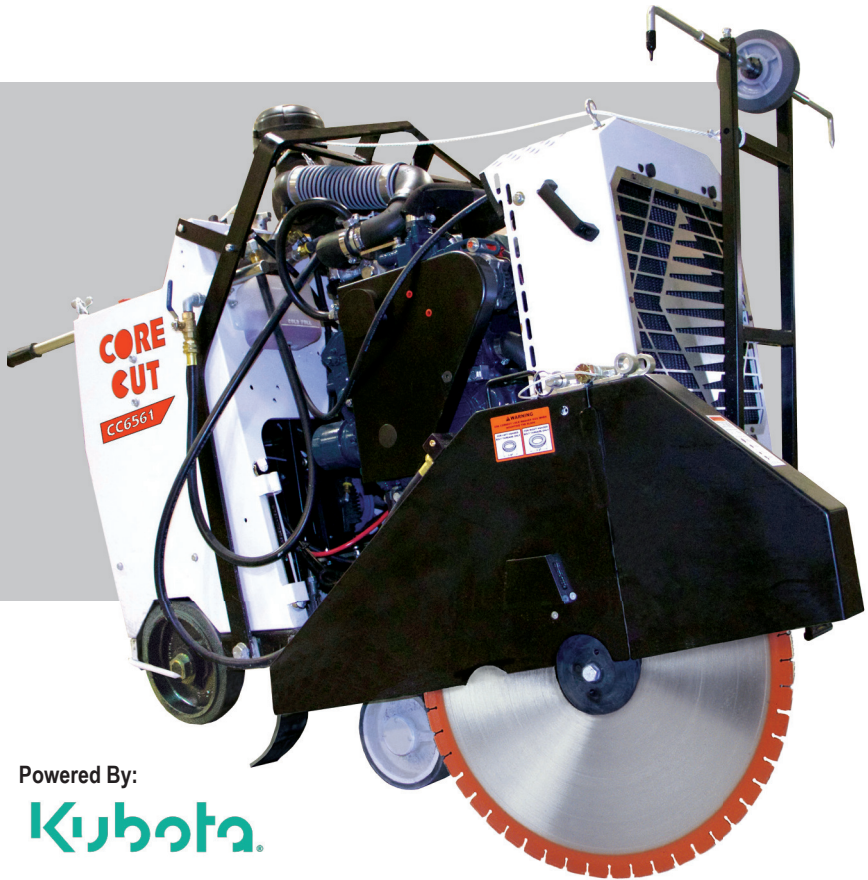

### Features & Benefits:

- Liquid-cooled Kubota® gasoline WG2503, spark ignited industrial 61HP engine that is fully compliant with EPA regulations
- Self-propelled Eaton Model 10 transmission
- Fits through a 36" door frame
- Strongest frame on the market
- 4 stage air filter system
- 17-3/4" maximum cutting depth
- Developed on an industrial diesel engine platform
- Very low noise and vibration
- Electronic fuel injection
- Modern computer engine controls (same as the CC6571D).
- 3-way catalytic muffler that meets the latest EPA & CARB emission requirements
- Single and 3-speed versions
- Specifications similar to CC6549D, but with more power and less noise, vibration and fumes

### Specifications:

Maximum depth of cut with 14" blade: 4-1/2" (3-3/4" - 3-speed)  
 Maximum depth of cut with 20" blade: 7-1/2" (6-3/4" - 3-speed)  
 Maximum depth of cut with 26" blade: 10-1/2" (9-3/4" - 3-speed)  
 Maximum depth of cut with 30" blade: 11-3/4" (11-3/4" - 3-speed)  
 Maximum depth of cut with 36" blade: 14-3/4" (14-3/4" - 3-speed)  
 Maximum depth of cut with 42" blade: 17-3/4" (17-3/4" - 3-speed)

Blade shaft diameter: 2"  
 Arbor size: 1" with drive pin  
 Blade shaft drive: 10 belt  
 Blade mounting: Right or left  
 Blade raise & lower: Electro-hydraulic pump  
 Transmission: Eaton model 10  
 Drive speed: 0-200 feet/minute  
 Air filter: 4 stage  
 Fuel capacity: 9 gallons

### Includes:

Blade shaft tachometer      Hour meter  
 Frame lift      Telescoping front pointer  
 Parking brake      Cutting depth indicator  
 Quick disconnect blade flanges      Oil bath blade shaft

Powered By:



### CC6561GK Control Panel

Detailed control panel for easy operator use.  
 Electronic engine controls for clean running and lower operating costs.

Parts List #1802551 / 1802552  
 Operator Manual: # 1804001

Diamond Products Limited  
 333 Prospect St. Elyria, OH 44035  
 800-321-5336 · www.diamondproducts.com



## CC6561GK KUBOTA GAS WALK BEHIND SAWS - 61HP

Model #	Engine Make	Engine Power	Power Source	Speeds	Part #	Cat #	Blade Capacity	List Price
CC6561GK-14	Kubota® WG2503	61 HP	Gasoline	Single	5801180	75242	14"	<b>\$31,328</b>
CC6561GK-20	Kubota® WG2503	61 HP	Gasoline	Single	5801181	75241	20"	<b>\$31,414</b>
CC6561GK-26	Kubota® WG2503	61 HP	Gasoline	Single	5801182	48097	26"	<b>\$31,498</b>
CC6561GK-30	Kubota® WG2503	61 HP	Gasoline	Single	5801183	74109	30"	<b>\$31,567</b>
CC6561GK-36	Kubota® WG2503	61 HP	Gasoline	Single	5801184	75243	36"	<b>\$31,699</b>
CC6561GK-42	Kubota® WG2503	61 HP	Gasoline	Single	5801185	75245	42"	<b>\$31,899</b>
CC6561GK-3-14	Kubota® WG2503	61 HP	Gasoline	3-Speed (14"/26"/36")	5801190	75246	14"	<b>\$35,396</b>
CC6561GK-3-20	Kubota® WG2503	61 HP	Gasoline	3-Speed (20"/30"/42")	5801191	75249	20"	<b>\$35,458</b>
CC6561GK-3-26	Kubota® WG2503	61 HP	Gasoline	3-Speed (14"/26"/36")	5801192	75251	26"	<b>\$35,521</b>
CC6561GK-3-30	Kubota® WG2503	61 HP	Gasoline	3-Speed (20"/30"/42")	5801193	75252	30"	<b>\$35,547</b>
CC6561GK-3-36	Kubota® WG2503	61 HP	Gasoline	3-Speed (14"/26"/36")	5801194	75254	36"	<b>\$35,669</b>
CC6561GK-3-42	Kubota® WG2503	61 HP	Gasoline	3-Speed (20"/30"/42")	5801195	75255	42"	<b>\$35,850</b>

List prices valid through December 31, 2016.

### CC6561GK OPTIONS

Description	Part #	Cat #	List Price
Water Safety Switch	6010522	67821	<b>\$153</b>
Water Pump (electric)	6011032	02506	<b>462</b>
Spot Light	6010112	02427	<b>171</b>
Lowering Speed Metering Valve	6010227	02480	<b>258</b>
Blade stacking kit - 4-1/2" flange (for blades 1-1/2" apart)	6010630A	23186	<b>853</b>
Blade spacing kit - 4-1/2" flange (for blades 2" apart)	6010631A	23187	<b>898</b>
Blade spacing kit - 4-1/2" flange (for blades 4" apart)	6010632A	16558	<b>1,061</b>
14" Tapered Mount Blade Guard	6010950	20011	<b>415</b>
20" Tapered Mount Blade Guard	6010952	08213	<b>616</b>
26" Tapered Mount Blade Guard	6010954	19322	<b>794</b>
30" Tapered Mount Blade Guard	6010956	20456	<b>981</b>
36" Tapered Mount Blade Guard	6010958	13375	<b>1,101</b>
42" Tapered Mount Blade Guard	6010960	08216	<b>1,244</b>

### CC6561GK SINGLE SPEED RPM

Blade Size	Blade RPM	Max Cut Depth
14"	2700	4-1/2"
20"	2400	7-1/2"
26"	1950	10-1/2"
30"	1700	11-3/4"
36"	1400	14-3/4"
42"	1200	17-3/4"

### CC6561GK 3-SPEED RPM

Blade Size	Blade RPM	Gear Setting High, Med, Low	Max Cut Depth
14"	2700	H	3-3/4"
20"	2550	H	6-3/4"
26"	1775	M	9-3/4"
30"	1675	M	11-3/4"
36"	1175	L	14-3/4"
42"	1100	L	17-3/4"

