

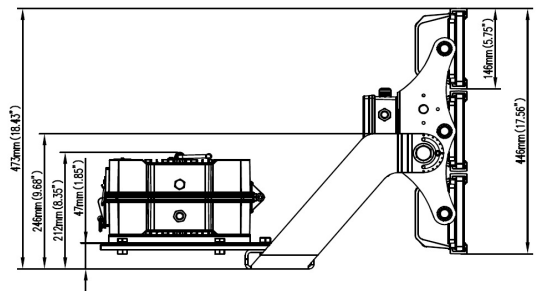
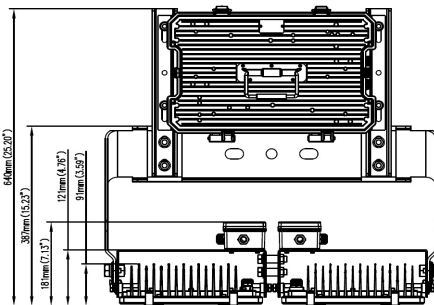


Integrated Power

FLC SERIES HIGH OUTPUT FLOODLIGHT - 1200W

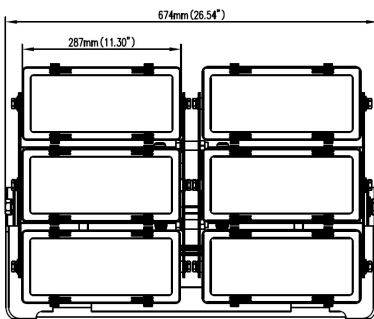

The FLC Series floodlights are a heavy duty, robust fitting built to cater to a wide range of demanding applications such as industrial areas, mining and security. Designed with 180deg highly adjustable heavy duty bracket and specialised optics, it can easily be adapted to a wide range of floodlighting projects.



Features

- High Specification Osram LED's
- Premium Quality Inventronics Driver
- Remote driver capable
- Bird protected cables
- Symmetric & Asymmetric Optics
- Narrow optics for long distance applications
- Heavy duty 180deg adjustable bracket

Application

- Sporting grounds
- Parking lots
- Mining
- Loading docks
- Long distance lighting

Standard Specifications

- Rated input power - 1200W
- Lumen output - 168,000lm (5000K)
- Operating Temp -30degC to+40degC
- CRI - Ra70 (Ra80 optional)
- Colour Temp - 5000K
- IP Rating - IP65
- Lifetime - L70 >50,000hrs
- EPA (Sail Area) - 0.359m2
- Fitting weight - 26.6 kg
- Driver box weight - 12.7 kg

Options List

- 0-10V Dimming /0-10V
- DALI Dimming /DALI

Models List

Symmetric Beam Angle 10 deg	FLC1200SI5KN01	Special Order
Symmetric Beam Angle 15 deg	FLC1200SI5KN02	Special Order
Asymmetric Beam Angle 15x40 deg	FLC1200SI5KN03	Special Order

Accessories

IES Files

IES FLC1200SI5KN01 10 Deg 1200W
IES FLC1200SI5KN02 15 Deg 1200W
IES FLC1200SI5KN03 15x40 Deg 1200W

1300 551 942

sales@integratedpower.net.au



Integrated
POWER

* For full warranty terms and conditions visit www.integratedpower.net.au

Date : 20-4-2020