



HBX Series 2

CASAMBI LED SMART HIGHBAY - 200W

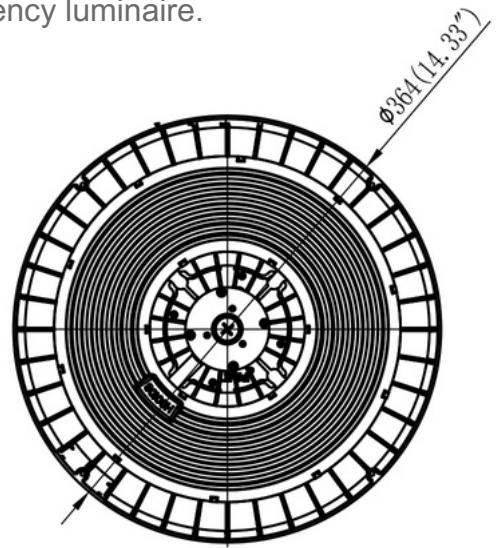

Introducing the HBX Series 2 highbay, Integrated Power's latest addition to our CASAMBI LED smart lighting range. The powerful Casambi application gives you all the control with groups, dimming, time schedules and much more. The HBX Series 2 highbay includes a range of features in a compact, high quality, high efficiency luminaire.

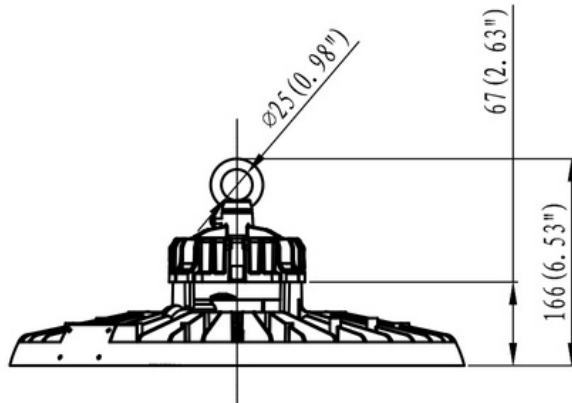

Features

- Casambi smart controls via App
- User friendly App interface
- Wide lighting distribution
- High efficacy 150lm/W LED chips
- Multiple optics available
- 1.5m cable with Australian plug

Applications


- Exhibition Centres
- Warehouses
- Showrooms
- Museums
- Factories
- Gymnasiums
- Workshops



Standard Specifications

- Rated Input Power: 200W
- Lumen Output: 30,000lm (200W)
- Colour Temperature : 5000K (3000K/4000K Optional)
- CRI Rating: CRI >80
- SDCM Rating: < 3
- Beam Angle: 120° (30°, 60°, 90°)
- IP Rating: IP65
- IK Rating: IK08
- Operating Temp: 0°C to 50°C
- Service Life: 64,000hrs /L80 (@25°C_{Ta})
- Fitting Weight: 2.9kg (+/- 0.3kg)
- Zhaga Book 18 interface to Casambi

Optics Available

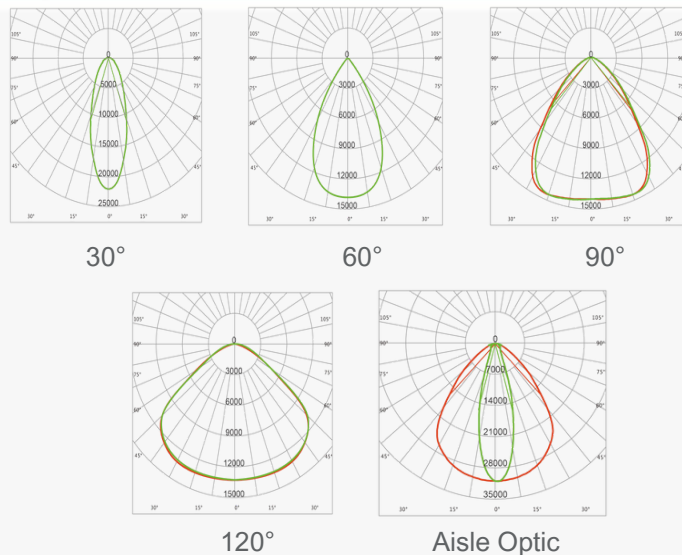

Models List

120° Optic / 4000K / Black	HBX2C200BK4KD01
30° Optic / 4000K / Black	HBX2C200BK4KD02
60° Optic / 4000K / Black	HBX2C200BK4KD03
90° Optic / 4000K / Black	HBX2C200BK4KD04
Aisle Optic / 4000K / Black	HBX2C200BK4KD05
120° Optic / 5000K / Black	HBX2C200BK5KD01
30° Optic / 5000K / Black	HBX2C200BK5KD02
60° Optic / 5000K / Black	HBX2C200BK5KD03
90° Optic / 5000K / Black	HBX2C200BK5KD04
Aisle Optic / 5000K / Black	HBX2C200BK5KD05

(3000K available under special order)

Accessories



Polycarbonate Diffuser Kit

HBX2DK01



Tilt Adjustable Bracket

HBX2BL01



Aluminium 90° Reflector Kit / Black

HBX2RK01B

Aluminium 90° Reflector Kit / Silver

HBX2RK01

IES Files

Available on request



Scan for app

