
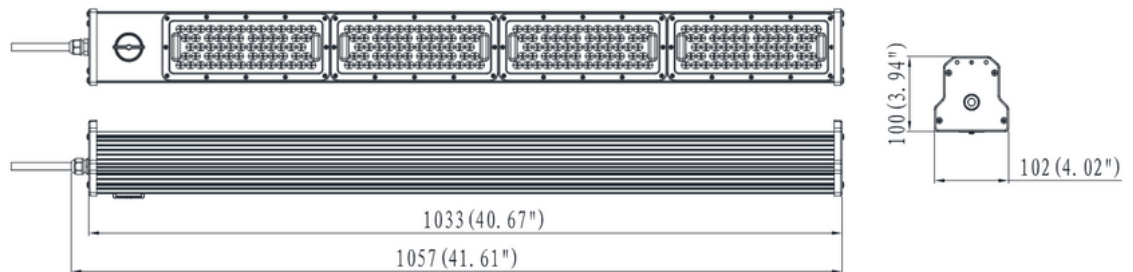


LHB Series

LINEAR LED HIGHBAY - 200W

The LHB Series is the latest addition to Integrated Power's highbay collection. The LHB Series' high lumen output provides a cost-effective and efficient lighting result. The wide range of optics available allows for precise lighting for all types of warehouse layouts and applications. By adding Casambi wireless control, users can experience smart lighting via the user friendly Casambi App and multiple smart control options, giving full control at your fingertips.

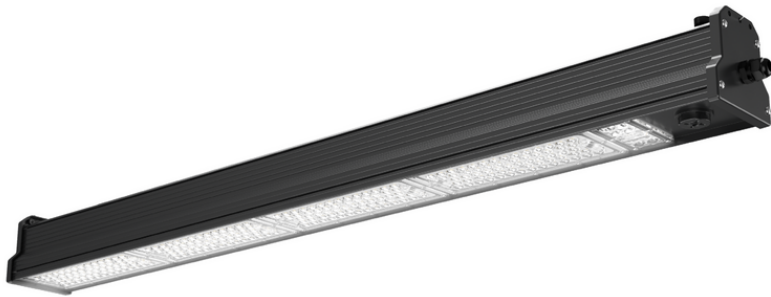

Features

- Wide range of optics
- Aluminium alloy finish
- Polycarbonate optical lens
- Durable, lightweight design
- High lumen output
- Zhaga Book 18 interface
- Suspension kit included
- Casambi ready

Applications

- Shopping Centres
- Supermarkets
- Warehouses
- Factories
- Retail
- Corridors
- Stations



Standard Specifications

- Rated Input Power: 200W
- Lumen Output: 34,000lm (170lm/W)
- Colour Temperature: 5000K (3000K/4000K optional)
- Beam Angle: 30°x70°, 50°x90°, 120°, 40°x120°, 90°, Tilt 40°
- CRI Rating: CRI>80
- SDCM Rating: < 3
- IK Rating: IK08
- IP Rating: IP65
- LED Lifespan: L80/ 86,800@Ta=25°C
- Fitting Weight: 3.44kg
- Dimensions: 1024mm * 102mm * 100mm

Option List

- DALI Dimming / DALI
- Casambi / CAS

Models List

Black / 5000K / 30* 70° Optic	LHB200BK5KD01
Black / 5000K / 50* 90° Optic	LHB200BK5KD02
Black / 5000K / 120°	LHB200BK5KD03
Black / 5000K / 40* 120°	LHB200BK5KD04
Black / 5000K / 90°	LHB200BK5KD05
Black / 5000K / Tilt 40°	LHB200BK5KD06

3000K, 4000K models are available upon request

Accessories

Adjustable Surface Mount Bracket LHB1BL01



Microwave Sensor LHB1MSE01

PIR Sensor LHB1PSE01

Remote Control (PIR & Microwave Sensor) LHB1SREMO1

IES Files

IES LHB200BK5KD01 5000K 200W 30*70°

IES LHB200BK5KD02 5000K 200W 50*90°

IES LHB200BK5KD03 5000K 200W 120°

IES LHB200BK5KD04 5000K 200W 40*120°

IES LHB200BK5KD05 5000K 200W 90°

IES LHB200BK5KD06 5000K 200W Tilt 40°

