



PathPro Series

LED STREETLIGHT

30W SILVER



Integrated Power's PathPro Smart Streetlights offer the highest of specifications in a modern and ultra reliable fitting. The smooth housing limits the build up of dirt and debris. Their extensive range of professional optics allow for optimal glare and spill lighting control. Also fitted with a 7-pin NEMA socket as standard, they're future proofed for smart upgrade.

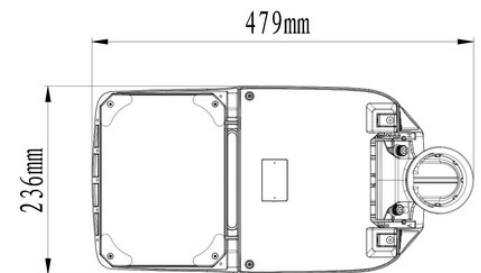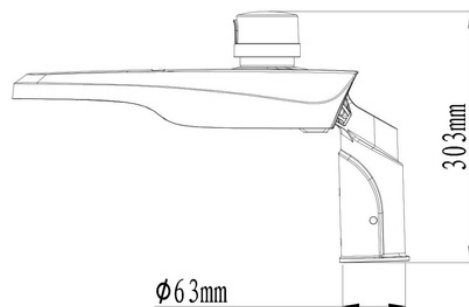

Features

- High efficacy 160lm/W LED chips
- All aluminium & stainless steel fitting construction
- Professional optics for glare & spill control
- 7-pin NEMA socket with shorting cap included
- Smart Module Ready (Telensa compatible)
- Reversible arm for horizontal and vertical spigots
- Auto isolation safety system
- Casambi ready (Casambi module required)
- [IPX output control](#) compatible

Applications

- Parks
- Walkways
- Carparks
- Caryards
- Parks
- Roadways

Option List

- PE Cell /PE
- DALI Dimming /DALI
- Casambi /CAS
- IPX Output Control
(additional hardware required)




Standard Specifications


- Rated Input Power: 30W (1-10V output adjustable)
- Lumen Output: 4,800lm (30W)
- Colour Temperature: 4000K (5000K / 3000K optional)
- SDCM Rating: < 3
- CRI Rating: CRI>80
- Operating Temperature: -30/+50°C
- EPA (Sail Area): 0.12m²
- Service Life: L90B10 / >50,000hrs@25°Ta
- Ingress Protection: IP66
- IK Rating: IK09
- Adaptor Size: 60mm (suits 60mm OD spigot)
- Fitting weight: 3.5kg ± 0.3kg

Models List


Silver / Optic ASYM-01	SL430SI4KD01	Silver / Optic ASYM-07	SL430SI4KD07
Silver / Optic ASYM-02	SL430SI4KD02	Silver / Optic ASYM-08	SL430SI4KD08
Silver / Optic ASYM-03	SL430SI4KD03	Silver / Optic ASYM-09	SL430SI4KD09
Silver / Optic ASYM-04	SL430SI4KD04	Silver / Optic ASYM-10	SL430SI4KD10
Silver / Optic ASYM-05	SL430SI4KD05	Silver / Optic ASYM-11	SL430SI4KD11
Silver / Optic ASYM-06	SL430SI4KD06		




ASYM-01




ASYM-02




ASYM-03




ASYM-04




ASYM-05




ASYM-06




ASYM-07




ASYM-08



ASYM-09



ASYM-10



ASYM-11

Accessories

Spigot Arm Adaptor - 34mm	SL2ADP34
Spigot Arm Adaptor - 42mm	SL2ADP42
Spigot Arm Adaptor - 76mm	SL2ADP76
Wall Mount Bracket	SL2WADP01
Right Angle Pole Adaptor - 90mm	SL2RADP90
Dual Spigot Adaptor - 60mm	SL2ADP60D
Dual Spigot Adaptor - 76mm	SL2ADP76D
100mm Square Pole ADP - Single	SL2ADP100SQS
100mm Square Pole ADP - Double	SL2ADP100SQD

IES Files

- IES SL430SI4KD01 ASYM-01 30W
- IES SL430SI4KD02 ASYM-02 30W
- IES SL430SI4KD03 ASYM-03 30W
- IES SL430SI4KD04 ASYM-04 30W
- IES SL430SI4KD05 ASYM-05 30W
- IES SL430SI4KD06 ASYM-06 30W
- IES SL430SI4KD07 ASYM-07 30W
- IES SL430SI4KD08 ASYM-08 30W
- IES SL430SI4KD09 ASYM-09 30W
- IES SL430SI4KD10 ASYM-10 30W
- IES SL430SI4KD11 ASYM-11 30W



Scan for app

