

DS18[®]

PRO

PRO-DKH1XS

TITANIUM COMPRESSION DRIVER AND ALUMINUM SHORT HORN KIT

Peak Power Handling: 640 Watts

Program Power Handling: 320 Watts

AES Rated Power: 160 Watts

Sensitivity (1w/1m): 115dB

Frequency Response: 630Hz-20KHz

Nominal Impedance: 8 ohm

Throat Diameter: 2"

Recommended Hi Pass Crossover: 900Hz

Voice Coil Diameter: 2.03"

Diaphragm Material: Titanium

Magnet Material: Ferrite

Magnet Weight: 35 oz

Bolt Type: Bolt-on

DS18[®]

PRO

PRO-DKH1XS

2.03" VC

TITANIUM COMPRESSION DRIVER AND ALUMINUM SHORT HORN KIT




640W
Peak Power

320W
Program Power

8 OHMS

OWNER'S
MANUAL


SPL vs Freq

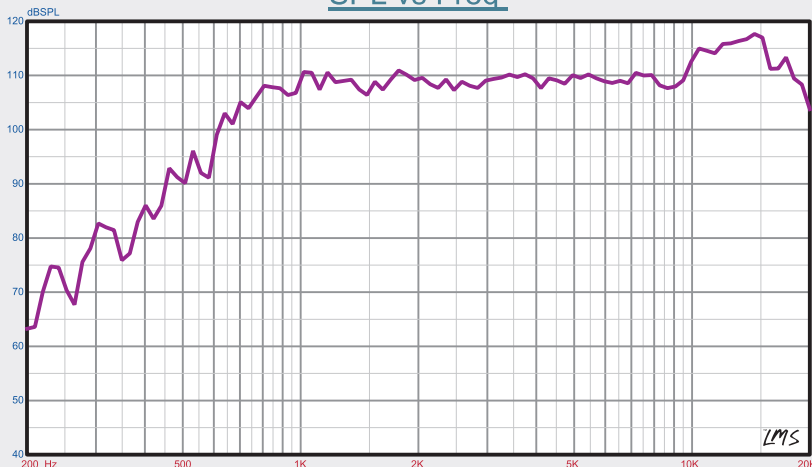

PRO-DKH1XS

TITANIUM COMPRESSION DRIVER AND ALUMINUM SHORT HORN KIT

Data Sheet

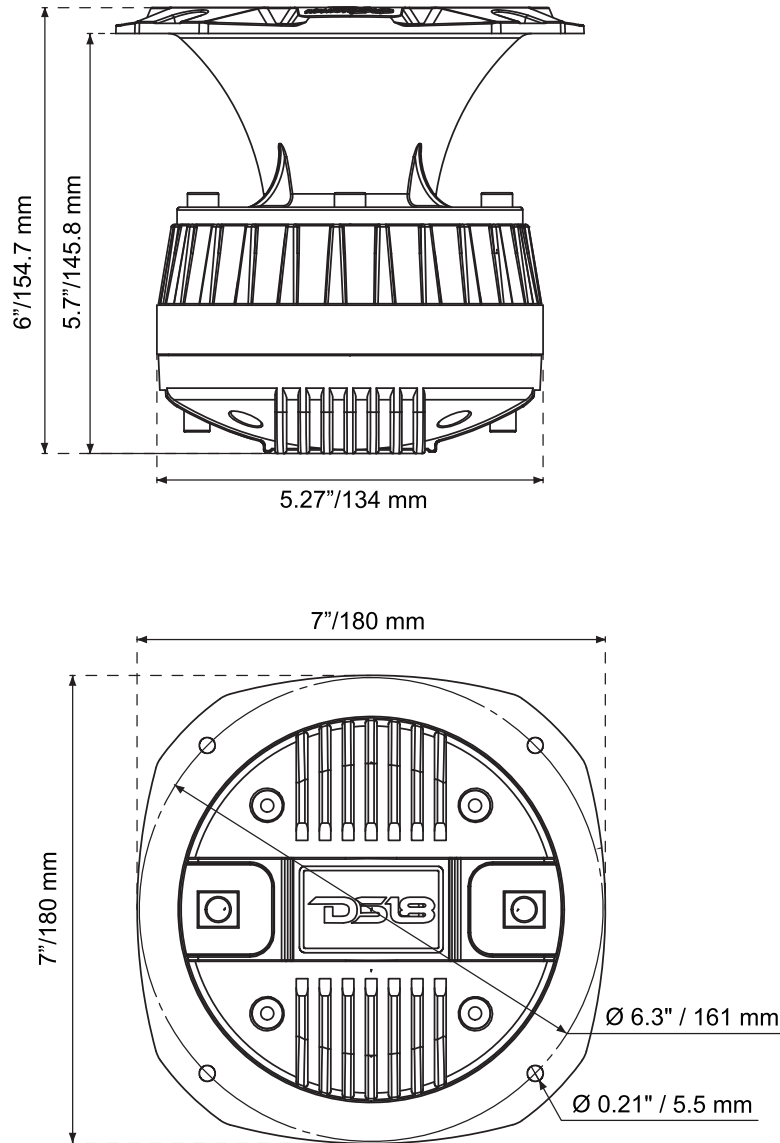

TITANIUM COMPRESSION DRIVER AND ALUMINUM SHORT HORN KIT

Specifications:

Throat Diameter	2"/50.8mm
Installation Type.....	Bolt-on
Nominal Impedance	8 OHMS
Peak Power Handling	640W
Program Power Handling	320W
AES Power Handling.....	160W
Sensitivity (1w/1m)	115 dB
Frequency Response	630Hz-20KHz
Recommended HI Pass Crossover	900 Hz

Motor

Voice Coil Diameter.....	2.03"/51mm
Voice Coil Former Material	Kapton
Winding Material	CCA
Diaphragm Material	Titanium
Magnet Material.....	Ferrite
Magnet Weight	35oz

Measurements

Overall Diameter	7"/180 mm
Overall Depth	6"/154.7 mm
Bolt Pattern/Type.....	5.5mm hole - 6.3"/161 mm Diameter
Mounting Depth	5.7"/145.8mm
Mounting Hole Diameter.....	5.7"/145mm