



PRO-GM6.4B


Black Color Paper Woofer Cone
Cloth Surround, Black Stamp Basket
6.5" Nominal Basket Diameter with Bullet
Magnet Structure: 23 oz with Rubber
Boot Cover
480 Watts MAX Power
140 Watts RMS Power
1.5" High Temperature Kapton Voice Coil
Sensitivity: 95dB
Nominal Impedance: 4 OHM
Frequency Response: 85-6KHZ
Mounting Depth: 2.5"

PRO-GM6.4B

**6.5" MIDRANGE LOUDSPEAKER
WITH BULLET**

4 OHMS

SPL vs. FREQ

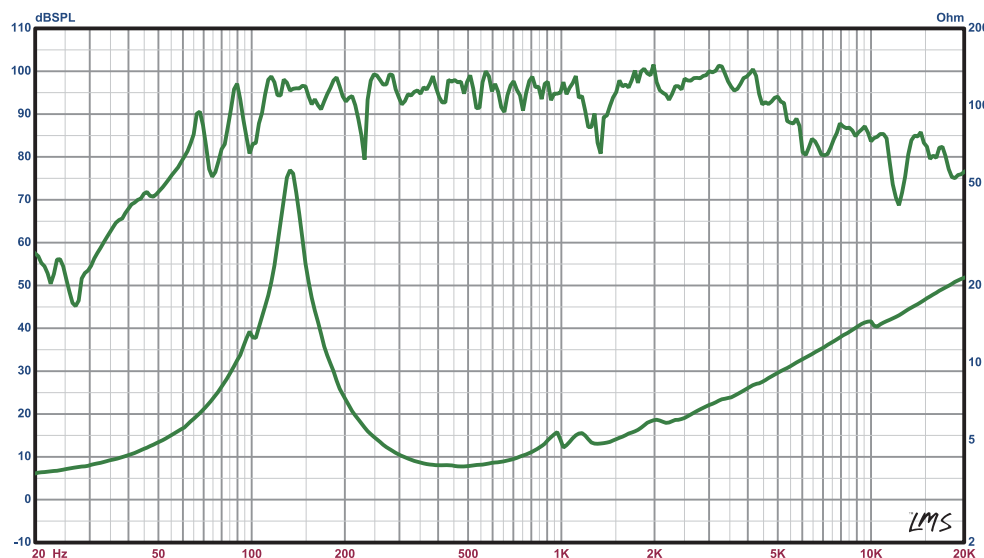



OWNER'S MANUAL

#WELIKEITLOUD    



PRO-GM6.4B

6.5" MIDRANGE LOUDSPEAKER
WITH BULLET

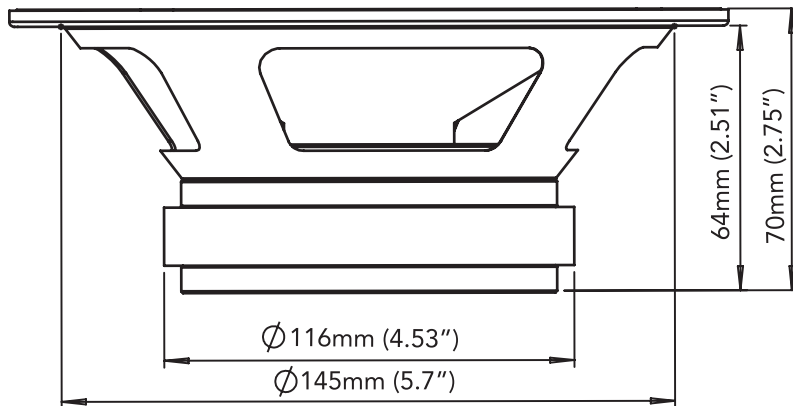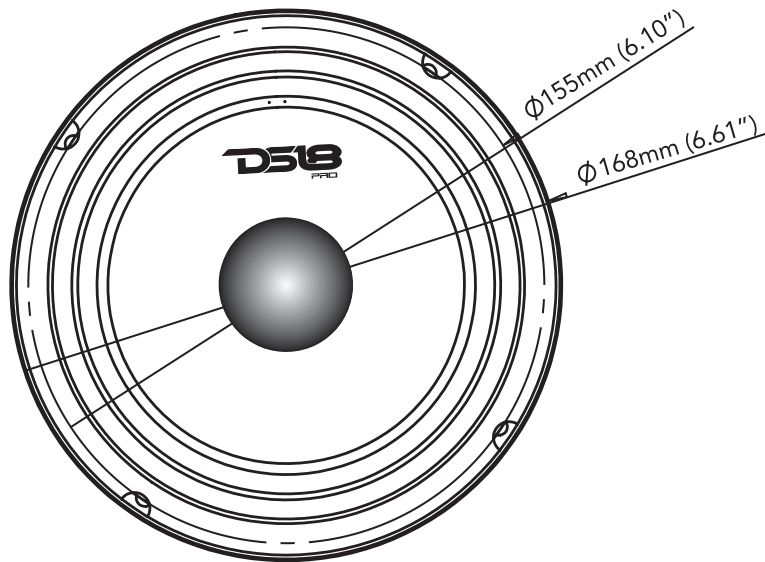

PRO-GM6.4B

6.5" MIDRANGE LOUDSPEAKER WITH BULLET

SPECIFICATIONS:

Overall Diameter	168mm / 6.61"
Baffle Cutout Diameter	145mm / 5.70"
Mounting Depth	64mm / 2.51"
Nominal Impedance	4 OHM
Rms Power Handling	140 Watts
Maximum Power Handling	480 Watts
Sensitivity (1w/1m)	95dB
Frequency Response	85-6KHz
Voice Coil Diameter	38.6mm / 1.5"
Winding Material	KCCAW
Magnet Weight	Ferrite 23 Oz.
Basket Material	Steel

THIELE, SMALL PARAMETERS

Fs	130Hz
Re	3.2 OHM
Qes	0.529
Qms	6.376
Qts	0.489
Vas	5.471dm ³

#WELIKEITLOUD    

DS18.COM