

INSTRUCTIONS

METRO BOLLARD



4642.31 4642.52

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** Body made in aluminium with a polycarbonate cover. (need to stop using abbreviations "PC")
- **Lamp types:**
60W 230V E27
- **Protection against electric shock:** CLASS I. Requires earth connection.
- **Ingress Protection:** IP44. Protection against the entry of solid bodies greater than 1mm. Protection against water sprays.
- **Ballast:** not required.
- **Quality/Corrosive rating:** Suitable for domestic and commercial use in indoor/outdoor applications, except in corrosive environments.
- **Ambient temperature range:** -25°C to +55°C.

INSTALLATION INSTRUCTIONS:

⚠ Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.



CAUTION: Risk of electric shock

PLEASE NOTE: The light source contained on this luminaire shall only be replaced by the manufacturer or the service agent or a similar qualified person.

Switch off mains supply.

- Mark 3 points on the ground where you would like to install the fitting, the diameter of the base is Ø125. Drill holes where you marked and insert the expansion screws into the ground. (Fig. 1)
- Connect the fitting to its electrical source using the terminal block provided: (Fig. 2)
Brown (Live) - to Brown or Red
Blue (Neutral) - to Blue or Black
Green/Yellow (Earth) - to Green/Yellow or Copper.
- Fix the fitting to the ground with the screws provided. (Fig. 3)
- Remove the diffuser by twisting and Install the lamp. (Fig. 4)

Turn on mains supply

WARNING:

- Ensure all items and screws are secure and fitted correctly.

METRO BOLLARD

Fig.1

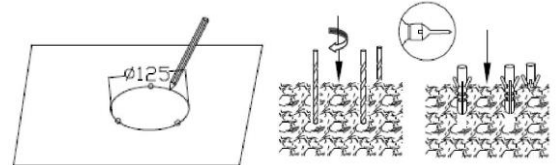


Fig.2




Fig.3



Fig.4

