


Control Cable 22AWG 4C

Plenum (CMP) Shielded Stranded

Cable Detail

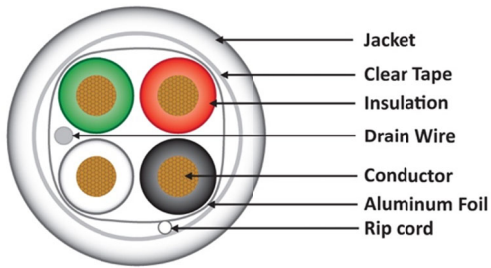

Approval



Applicable Standards

- Power-limited control circuits
- Wiring of the following systems: Security / Audio / Background music
- Reference Standard: UL 444 / ETL: CL2P/CMP

Physical Characteristics

Conductor Material		Stranded Bare Copper
AWG		22
Conductor	(mm)	7 / 0.24
Insulation Material		FR-PVC
Average Thickness	(mm)	0.190
Min. Point Thickness	(mm)	0.170
Insulation Diameter	(±0.03mm)	1.1
Drain Wire		24 AWG Stranded Tinned Copper
AL-foil Shielded		Overlap ≥25%
Assembly Dia.	(±0.2mm)	2.75
Jacket Material		Low Smoke FR-PVC
Average Thickness	(mm)	0.38
Min. Point Thickness	(mm)	0.34
Outer Dia.	(±0.2mm)	3.55
Rip Cord		Yes
Insulation colors		Black / Red / White /Green
Nominal Weight	1000 ft.	20.9 lbs.

Electrical Characteristics

Capacitance	130 Pf/m
DC Resistance (Ω/km) Max	58.5
Spark Test	2.5 kv
Dielectric Test	2 kv/min
Suggested Voltage Rating	DC 300V/min
Max. Recommended Pulling Tension	110 N
Min Bend Installation	35 mm
Storage Temperature Range	-20 ~ +60°C
Installation Temperature Range	0 ~ +50°C
Operating Temperature Range	-20 ~ +60°C

Mechanical Characteristics

Test Object		Jacket
Test Material		PVC
Before	Tensile Strength (Mpa)	≥17.2
Aging	Elongation (%)	≥100
Aging Condition (°Cxhrs)		100x168
After	Tensile Strength (Mpa)	≥85% of unaged
Aging	elongation (%)	≥50% of unaged
Cold Bend (-20±2°Cx4hrs)		No crack

Cable Marking

22AWG 4C SHIELDED CMP/CL2P TYPE XXXXXXXX C(ETL)US
****FT

Part Numbers	Jacket Color	Package
CC2204FPWH4	White	1000 ft / Reelex II