

Self Contained Ice Machine up to 137 Kg



EASY-FIT
Progressive Water Discharge

Noiseless bin door



Proximity condenser air filter



Routine Maintenance Alarm



Front ON-OFF Switch

Storage bin antibacterial pouch & holder



Pivoting rear wheels



Easy bin access



Hygienic scoop holder





Features

- Produces individual Gourmet crystal clear supercubes
- Up to 137 kg (302 lbs) daily ice cubes production
- Up to 50 kg (110 lbs) ice storage capacity
- Resistant stainless steel exterior
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice-storage access, with disappearing door
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice-storage area
- Optional PWD System for remote water drain (easy-fit installation)
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-404A Refrigerant
- 3 years manufacturer warranty

EC 206 Technologies



| | Icon | 10°: 10°C | | | 21°: 15°C | | | Icon | Dimensions |
|------------|------|-----------|-------|------|-----------|-------|-------|------|-----------------------------------|
| | | [kg] | [lbs] | N°* | [kg] | [lbs] | N°* | | |
| ECS 206 AS | Icon | 100 | 220,5 | 2500 | 91 | 200,5 | 11375 | Icon | [WxDxH mm] 1250x620x779-859 |
| ECS 206 WS | Icon | TBA | TBA | TBA | TBA | TBA | TBA | Icon | [WxDxH inches] 49"x24"x31"/33" |
| ECM 206 AS | Icon | 130 | 285,5 | 6500 | 115 | 253,5 | 5750 | Icon | |
| ECM 206 WS | Icon | 137 | 302,5 | 6850 | 127 | 280 | 6350 | Icon | |
| ECL 206 AS | Icon | 126 | 278 | 3230 | 113 | 249 | 2895 | Icon | |
| ECL 206 WS | Icon | 126 | 278 | 3230 | 119 | 262 | 3050 | Icon | |

*Estimate number of small, medium or large size gourmet cubes.
Standard legs 80 mm high included.

Small Gourmet
8 g



Ø 21 x H 25 mm

Medium Gourmet
20 g



Ø 29 x H 34 mm

Large Gourmet
39 g



Ø 38 x H 41 mm

Water inlet



Water outlet
(Progressive Water Discharge)
Water Discharge up to 15 mt away and 1.7 mt high with PWD)

EASY-FIT
Progressive Water Discharge

This product qualifies for the following listings:




3 Years Warranty
Subject to certain limitations and exclusions

www.scotsman-ice.it
www.scotsman-ice.com
Models and specifications are subject to change without notice.

Certified ISO 9001

Self Contained Ice Machine up to 137 Kg

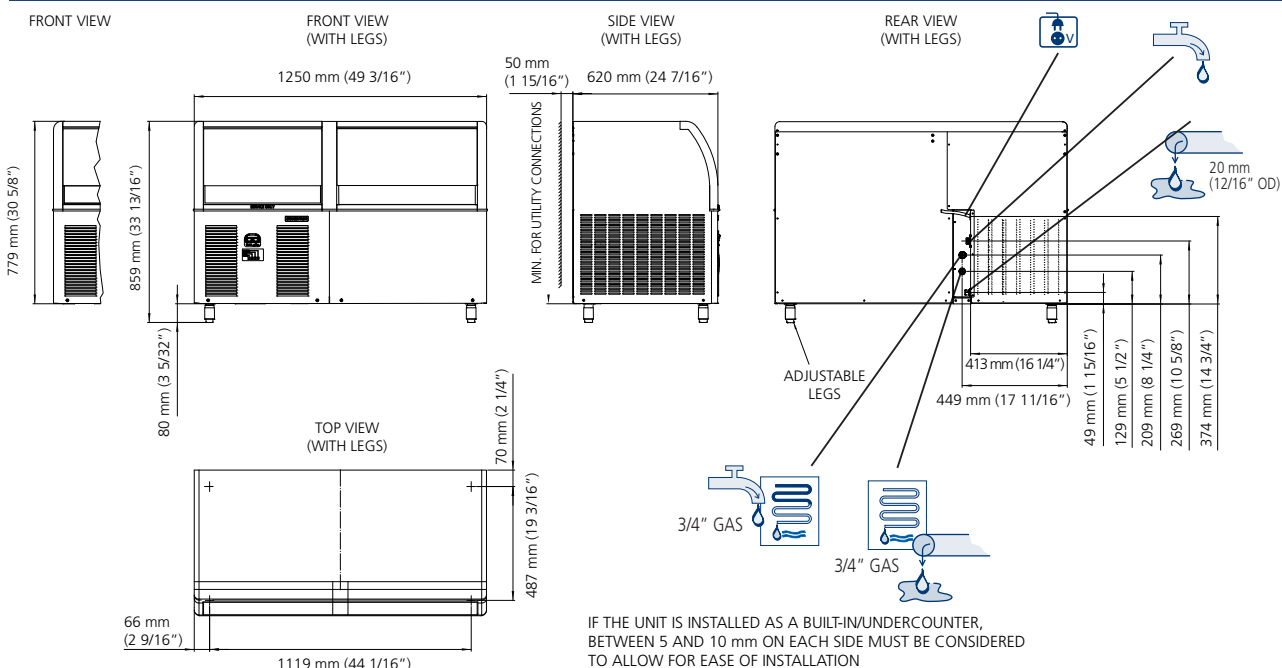

EC 206 AIR COOLED

| °C / °F | °C / °F | | | | kg |
|---------|-----------|-----------|-----------|-----------|-----|
| | 50° / 10° | 60° / 15° | 70° / 21° | 90° / 32° | |
| 10° | 130 | 122 | 114 | 98 | kg |
| 50° | 286.5 | 269 | 251 | 216 | lbs |
| 21° | 123 | 115 | 107 | 91 | kg |
| 70° | 271 | 253.5 | 236 | 200.5 | lbs |
| 32° | 99 | 95 | 91 | 83 | kg |
| 90° | 218 | 209.5 | 200.5 | 183 | lbs |
| 38° | 87 | 83 | 79 | 71 | kg |
| 100 | 191.5 | 183 | 174 | 156.5 | lbs |



EC 206 WATER COOLED

| °C / °F | °C / °F | | | | kg |
|---------|-----------|-----------|-----------|-----------|-----|
| | 50° / 10° | 60° / 15° | 70° / 21° | 90° / 32° | |
| 10° | 137 | 128 | 119 | 101 | kg |
| 50° | 302 | 282 | 262.5 | 222.5 | lbs |
| 21° | 136 | 127 | 118 | 100 | kg |
| 70° | 300 | 280 | 260 | 220.5 | lbs |
| 32° | 126 | 119 | 112 | 98 | kg |
| 90° | 278 | 262.5 | 247 | 216 | lbs |
| 38° | 124 | 117 | 110 | 96 | kg |
| 100 | 273.5 | 258 | 242.5 | 211.5 | lbs |



Minimum

10°C (50°F)



Maximum

40°C (104°F)

5°C (41°F)

-10%

1 BAR
14 psi

35°C (95°F)

+10%

5 BAR
70 psi

| Model | Cooling Type | Capacity [Btu/h] [W] | Ice Production [Ømm ²] | Power [W] | FUSE | Energy [kWh] - 100 Kg | Water [l/h] [gal/h] | Weight [kg] [lbs] | Dimensions [kg] [lbs] |
|------------|--------------|----------------------|------------------------------------|-----------|------|-----------------------|---------------------|-------------------|-----------------------|
| ECS 206 AS | Air Cooled | 7165 2100 | 1,5 | 950 | 16 | 29.8 | 7.5 2 | 84 185 | 97 213 |
| ECS 206 WS | Water Cooled | TBA TBA | TBA | TBA | TBA | TBA | TBA TBA | 84 185 | 97 213 |
| ECM 206 AS | Air Cooled | 7165 2100 | 1,5 | 950 | 16 | 22.9 | 11.5 3 | 84 185 | 97 213 |
| ECM 206 WS | Water Cooled | 7165 2100 | 1,5 | 700 | 16 | 15.5 | 104 27.5 | 84 185 | 97 213 |
| ECL 206 AS | Air Cooled | 7165 2100 | 1,5 | 950 | 16 | 21.6 | 9.6 2.5 | 84 185 | 97 213 |
| ECL 206 WS | Water Cooled | 7165 2100 | 1,5 | 700 | 16 | 15.5 | 116 30.6 | 84 185 | 97 213 |

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg