


**ifi**  
**ZEN**  
**STREAM**

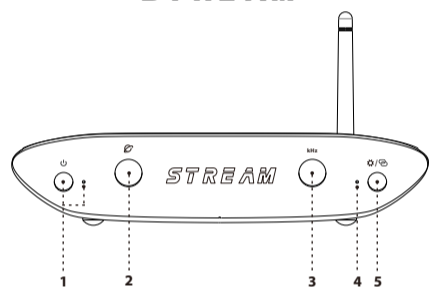

Thank you for purchasing the Stream from ZEN series. The Stream is a Wi-Fi Audio Transport.

**1. Power switch and indicator (⏻)**

**2. Network Status LED (📶)**

The LED color scheme indicates the signal strength and network status received by ZEN Stream from the router.

	LED	Speed
Internet	White	Fast
	Cyan	Slow
Local network (no Internet)	Green	Fast
	Yellow	Slow
No connection	Red	-

**3. Audio Format LED (kHz)**

The LED colour scheme indicates the audio format and sampling frequency received by ZEN Stream from the music source.

LED	Mode
Green	PCM 44.1/48/88.2/96kHz
Yellow	PCM 176.4/192/352.8/384kHz
Cyan	DSD 64/128
Blue	DSD 256
OFF	No Streaming


**4. LED for Hotspot Status**

LED	Status
Flashing	On and awaiting connection
ON	Hotspot Connected
OFF	Hotspot off

*\*60 seconds auto OFF if no activation.*

**5. LED/HOTSPOT switch (🔌/📶)**

- LED ON/OFF (short press)
- Hotspot ON/OFF (long press)

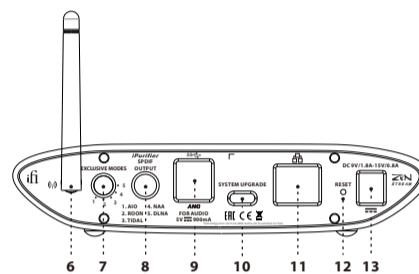

**6. Antenna**

Please attach the enclosed antenna for maximum reception quality.

**7. System (Mode) selector**

The following 5 play modes can be selected:

- 1) All In One. Use for set up
- 2) Room only
- 3) TIDAL only
- 4) NAA (Network Audio Adapter) only
- 5) DLNA only

**8. SPDIF (Coaxial) output**

This is a coaxial output with iPurifier technology built-in.

**9. USB Type A x 2**

Compatible with USB 2.0 and USB 3.0.

- a) Output - Connect to Dac
- b) Input - Connect to HDD, USB DISK etc

These two USB ports have ANC technology built-in.

**10. System upgrade port**

Used for system firmware upgrade.

**11. Ethernet**

For a Ethernet connection directly from a router.

**12. Factory Reset**

Long press >3s and WAIT for ~5mins  
DO NOT POWER OFF!

*\*\*Loss of power during this period may damage your device and leave it unusable.*

**13. DC power supply connection**

DC 9V/1.8A-15V/0.8A DC power input. Please connect ZEN Stream to the enclosed power supply.

*Tip: For all the various network connection methods, please visit our website.*

**Specifications**

<b>Input voltage:</b>	DC 9V/1.8A-15V/0.8A, AC 100-240V, 50/60Hz
<b>Input:</b>	WiFi/Ethernet/USB DISK, HDD etc.
<b>Formats:</b>	PCM384/DSD256
<b>Output:</b>	USB3.0/Type-A Socket x2 and SPDIF (Coaxial)
<b>Power consumption:</b>	No Signal ~6W Max Signal ~10W
<b>Dimensions:</b>	158 x 100 x 35 mm 6.2" x 3.9" x 1.4"
<b>Net weight:</b>	578 g (1.27 lbs)
<b>Warranty period:</b>	12 months

*Specifications are subject to change without notice.*