

POWERED by HONDA

900	
PS	

HBH13GC

22

Engine Brand	Honda GC160
Engine Starter	Recoil
Engine Displacement	160 cc
Pump Flow	7.0 GPM
Pump Displacement	7.4cc
Pump Ports	1/2" - 14 O-Ring
Pump Rotation Direction	Counterclockwise
Hydraulic Tank Capacity	5.6 Gallon
Hydraulic Tank Material	3/16" Steel
Hydraulic Tank Drain Port	1/2" NPT
Hydraulic Valve PSI	900 PSI
Hydraulic Valve Type	One-Way Detent, One-Way Spring Return
Hydraulic Valve Inlet	3/4-14 NPT
Hydraulic Valve Outlet	3/4-14 NPT
Wheel Kit	Optional (Item # HBHW13)
Weight	133 lbs
Dimensions (LxWxH)	27 x 14x 25
Consumer Warranty	2 Year Limited
Commercial Warranty	1 Year Limited





POWERED by

900 PSI

HBH16GX

\sim
Honda GX160
Recoil
163 cc
7.0 GPM
7.4сс
1/2" - 14 O-Ring
Counterclockwise
5.6 Gallon
3/16" Steel
1/2" NPT
900 PSI
One-Way Detent, One-Way Spring Return
3/4-14 NPT
3/4-14 NPT
Optional (Item # HBHW13)
143 lbs
27 x 14x 25
2 Year Limited
1 Year Limited

HYDRAULIC POWER PACKS

(1) Versatile

Power conveyors, augers, lifts, hydraulic motors, and a variety of other attachments and implements.

- Single-Stage Pump Single-stage pump delivers

constant flow and maximum pressure without spikes.

(3) Quick Connect Ports

Quick connect and disconnect, stainless steel 1/2" inlet and outlet ports for simple hook-up.

One-Way Detent Valve

One-way detent hydraulic valve enables constant power delivery

(G) Filtration

25 micron return line filter protects the hydraulic system


- 6 Magnetic Drain Plug A magnetic drain plug helps to reduce metal fillings and debris in the hydraulic system.
- (7) Hydraulic Fluid Dipstick A hydraulic fluid dipstick makes for easy level checks.





BRAVEPRO

HONDA.

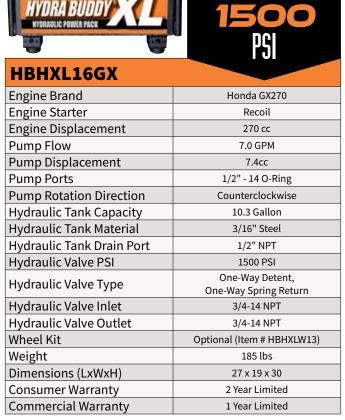



Wheel Kit

Large 10" diameter tires and a 1-1/4" steel handle make it easy to push or pull hydraulic power pack. Quick and easy bolt-on mounting with no drilling required.

ITEM # HBHW13 fits HBH16GC and HBH16GX ITEM # HBHXLW13 fits HBHXL16GX