


MA-705 Portable Sound System

Compact, Portable and Powerful

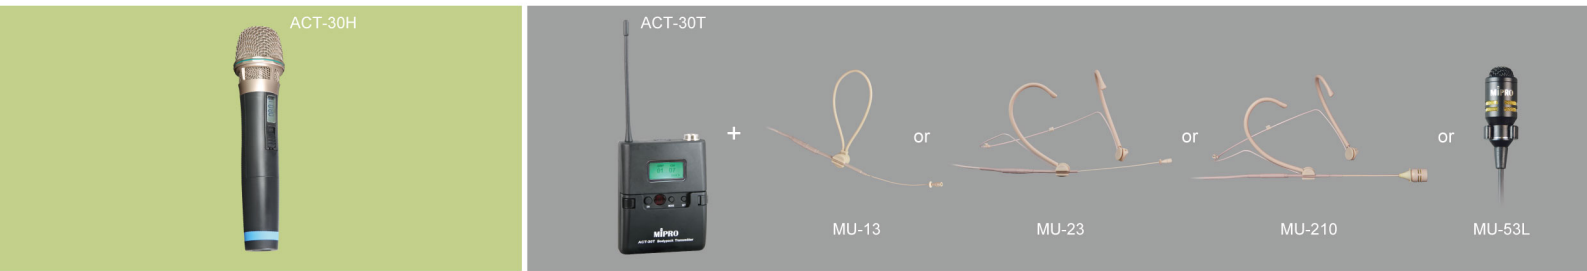

Weighting under 10kg (loaded) and delivering a huge 70 watts of power, the MIPRO MA-705 has set a new benchmark for performance in Portable Public Address Systems.

Key Features

- Huge 70 watts audio output.
- Weights less than 10kg / 21.5 pounds.
- Optional CD/USB player with remote control.
- Up to 2 UHF wireless microphone systems .
- Up to 8 hours of operation from built-in rechargeable batteries.
- VOP (voice over music priority) ensures lower music when speaking on microphones.
- New Echo control feature is added so singers sound fuller and richer.
- XLR and line level inputs.
- Line input for external iPod / MP3 / CD player; output for external recordings.
- Extension speaker output.
- Comfortable carry handle.
- Can be stand or table mounted.
- Robust, heavy duty housing.
- For crowds up to 500.

Ideal applications include

- Indoor/Outdoor seminars and assemblies.
- Places of worship.
- Corporate meeting rooms.
- Schools.
- Auctions.
- Election campaigns.
- Lecture theaters.



CD/USB Player Module

- Selection and search
- Tracks programmable
- Random & repeat playback
- USB port
- Wireless remote control included
- A>B zone memory programmable
- Plays standard 12cm(5-inch) audio CD



CDM-2


16-CH Diversity Receiver Module

- Industry easiest channel set-up via AutoScan and ACT
- Detects and overcome noise interference
- Long and reliable transmission



MRM-70

Accepts External iPod & other MP3 Players



i-Pod



On a Tripod Speaker Stand

Model shown with accessories



Specifications

Portable PA		
Power Output / Amplifier	70W (Max), Class AB	
T.H.D.	< 1%	
Frequency Response	50 Hz~18 kHz	
Loudspeaker	8" full-range	
Audio Inputs	Wired	Combo XLR & 6.3mm (1/4")
	Wireless	Up to 2 wireless microphones
	CD Player	CD, USB port
	Line-In	Unbalanced RCA jack
Audio Output	Unbalanced Line RCA jack	
Extension Speaker	6.3 mm (1/4") Phone jack	
Volume	Master and other individual controls	
Controls	Tone Control & Echo Control on wireless mics	
Installation	Speaker stand, flat surface or fixed handle	
Power Supply	AC	Built-in 100~240V AC switching power supply
	DC & Battery	12V/2.9AH rechargeable gel cell battery

Charge Time	Up to 6 hours (automatic charging management)
Standby Time	Up to 7 hours
Battery Indicator	Single LED indicator
Dimensions (W x H x D)	285 x 400 x 225 mm (11.2 x 15.7 x 8.9")
Weight	Approx. 9.8 kg (21.6 lbs), loaded
Wireless System (optional)	
Receiver	MRM-70
Max. Receiver	Up to 2
Transmitter / Microphone	ACT-30H Handheld / ACT-30T Bodypack MM-107 Wired Dynamic Microphone
Installation	Plug-in Module
Antenna	Built-in
Audio Player (optional)	
Model	CDM-2
Installation	Plug-in Module
Patents & Approvals	Patented. Telecom and safety regulations approved.
Notes	Refer to actual product in the event of product discrepancy. Frequency range and maximum deviation comply with the regulations of different countries.

