

LA CROSSE®
TECHNOLOGY

Atomic Digital Clock

with Temperature and Moon Phase



For online video support:

<http://bit.ly/LaxTechTalk>


Model: 513-1417CH

D.C.112318

Full manual can be found under the
Support Tab here: bit.ly/513-1417ch

Setup

- Power up.** Insert 2-AA batteries into the sensor, then into the clock. Observe the correct polarity.

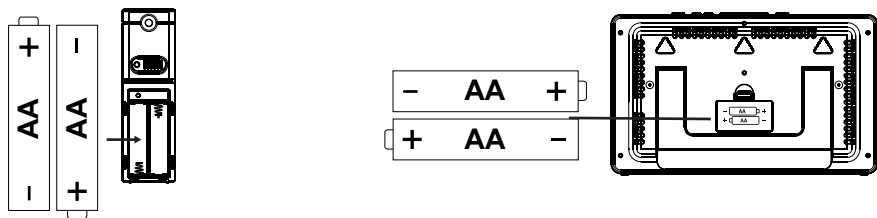

- Configure basic settings.** Hold the SET button for 3 seconds to enter settings menu. Use the +/- buttons to adjust and SET to confirm.


Setting order:

1. Language: English | Español
2. Beep ON | OFF
3. Atomic ON | OFF
4. DST ON | OFF (Daylight Saving Time)
5. Time Zone
6. Hour
7. Minutes
8. Year
9. Month
10. Date
11. Fahrenheit | Celsius


Note: When the Atomic setting is set to OFF, the menu will skip to item 6, your Hour setting

Note: When Español is selected, weekday and sub menu instructions will be in Spanish. Calendar order: Day, Month, Year.


English | Español




Beep ON | OFF



Atomic ON | OFF




DST ON | OFF




Time Zone

Time Zone


- AST Atlantic
- EST Eastern
- CST Central
- MST Mountain
- PST Pacific
- AKT Alaskan
- HAT Hawaiian




Hour




Minutes




Year




Month




Date



Fahrenheit | Celsius



Note: When setting the hour, AM indicates times before 12:00 (noon) and PM indicates time after 12:00 (noon).

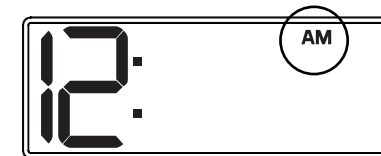


- Place outdoor sensor outside in the shaded location and enjoy your weather information.


Atomic Time

- The station will automatically search for the atomic time signal at UTC 7:00, 8:00, 9:00, 10:00, and 11:00.
- Press and release the SET button to search manually for atomic time signal.
- Press the SET button to select daylight saving time ON/OFF. If you do not observe DST, use the +/- button to turn off the Daylight Saving Time Indicator.
- For information about WWVB visit: <http://bit.ly/AtomicTime>

Display icons

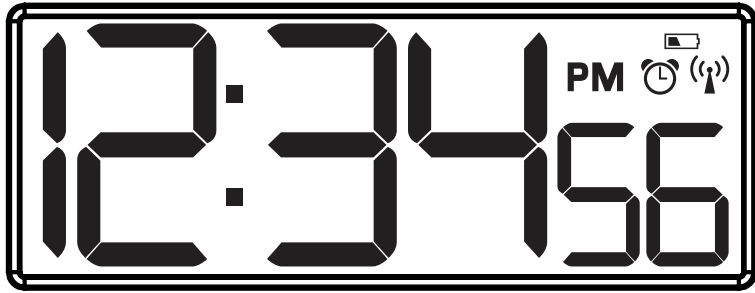


ATOMIC CLOCK

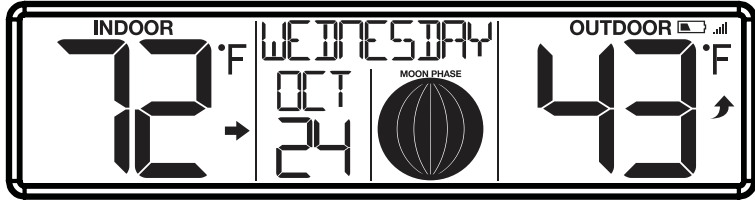

- Low Battery
- PM** AM | PM
- Alarm | Snooze
- Atomic Time
- F** Fahrenheit | Celsius
- Trend Arrow
- Sensor Signal Strength

Time Alarm

- Set: Hold the ALARM button for 3 seconds to enter alarm settings.
- Use the +/- buttons to adjust and ALARM to confirm.

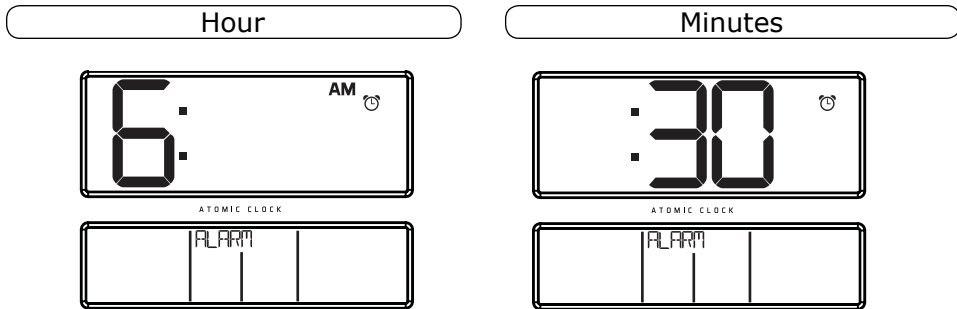


Deactivate | Activate: The alarm is active when set. Press and release the ALARM button to deactivate or activate the alarm. The clock icon will show when alarm is active.



Snooze: Press and release the SNOOZE button to silence the alarm for 10 minutes. Snooze can be repeated.


Moon Phase

The moon phase is based on the lunar calendar and the Year, Month, and Date settings set within this clock. Most Internet moon phase calculations are based on the lunar calendar and can be categorized into one of the following

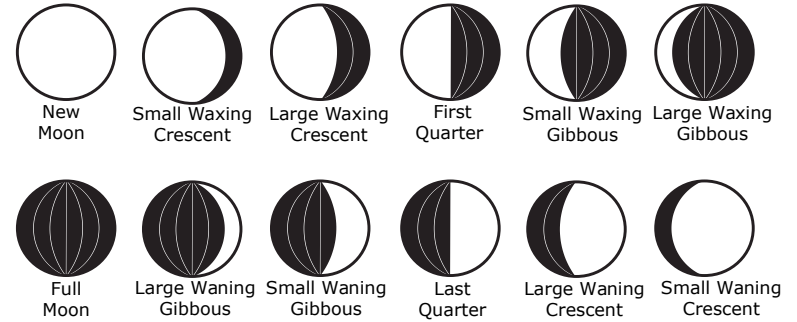


HI | LO Temperature

- Press the PLUS button to view HI Temperature.
- Press again to view LO Temperature.
- Hold the PLUS button for 5 seconds to reset HI and LO temperature.
Note: All records reset at midnight.

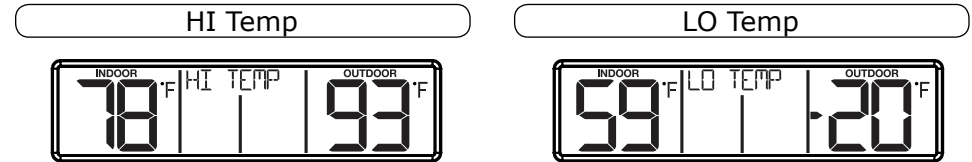

Temperature Trend Arrows

The outdoor temperature trend indicators update every 15 minutes and provide a 1 hour comparison of readings that took place every 15 minutes within that hour. The temperature will have to rise or fall by 2°F (1°C) or more within the hour for the arrows to change.

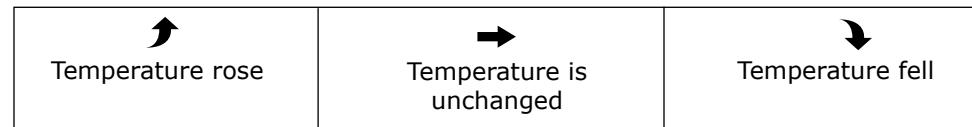


Help Us, Help You!

If you have ideas for features or support solutions you'd like to see us make, please let us know! We truly want to make owning a La Crosse Technology product not only a practical experience, but also a fun one. So email us at: store@lacrossetechnology.com

Let's Be Social!

Follow us on our social media outlets for the latest promotions, product support, and awesome giveaways.



Sensor Reception


- Hold the - button 3 seconds to search for the sensor.
- The strength signal icon will flash until the sensor signal is received or for 3 minutes if no signal available.
- The signal will show solid when connected to the sensor.

Low Battery Icon

- Battery icon by time-Change batteries in the clock.
- Battery icon by outdoor temperature-Change batteries in the sensor.

Mount Temperature Sensor

- Mount the outdoor sensor on a north-facing wall or in any well-shaded area. Under an eave or deck rail is preferred.
- The maximum wireless transmission range to the forecast station is over 300 feet (91 meters) in open air; this does not include barriers such as walls or floors.
- Be sure the outdoor sensor is mounted vertically.

 **WARNING:** This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to: www.P65Warnings.ca.gov

Position Clock

The clock has a pullout stand to sit on a desk or table, or openings on the back to mount on a wall.

- For best Atomic time reception orientate the clock with the front or the back facing Ft. Collins, Colorado.
- Choose a location 6 feet or more from electronics such as cordless phones, gaming systems, televisions, microwaves, routers etc.
- Place within range of the outdoor sensor (330 feet open air).

Restart

When the outdoor readings show dashes:

- Bring the sensor in the house five feet from the station.
- Remove batteries from the sensor, and the batteries from the clock.
- Press any button 20 times.
- After 15 minutes insert batteries into the sensor, and into the clock.
- Wait 15 minutes to establish a strong connection.
- Place sensor outside in shaded location.

Specifications

Indoor Temperature Range: 32°F to 122°F (0°C to 50°C)

Outdoor Temperature Range: -40°F to 140°F (-40°C to 60°C)

Transmission Range:

Over 300 ft. (91 meters) RF 433MHz (open air)

Power Requirements:

513-1417CH - 2 AA batteries (not included)

TX141-Bv3 - 2 AA batteries (not included)

Battery Life:

513-1417CH-over 12 months

TX141-Bv3-over 12 months

Dimensions:

513-1417CH- 11.10" W x 1.14" D x 6.75" H
(28.19 W x 2.89 D x 17.15 H cm)

TX141-Bv3- 1.57" L x 0.79" W x 5.12" H
(3.98 L x 2.0 W x 13.0 H cm)

Warranty and Support

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

Before returning a product, please contact our friendly customer support or visit our online help:

Phone: 1-608-782-1610

Online: www.lacrossetechnology.com/support

Care and Maintenance

- Do not mix old and new batteries
- Do not mix Alkaline, Standard, Lithium or Rechargeable Batteries
- Always purchase the correct size and grade of battery most suitable for intended use.
- Replace all batteries of a set at the same time.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries are installed with correct polarity (+ and -).
- Remove batteries from equipment which is not to be used for an extended period.
- Promptly remove expired batteries.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

Canada Statement

This device complies with CNR Industry Canada license -exempt devices.

Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.