


# **WS-7136U**

## **Wireless 433 MHz**

### **Temperature Station**

## **Instruction Manual**

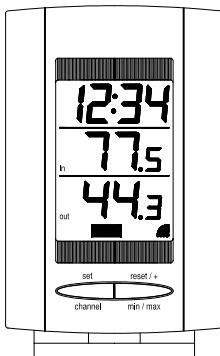

**LA CROSSE**  
**TECHNOLOGY**  
*technology tools for home & office*

# TABLE OF CONTENTS

<b>Topic</b>	<b>Page</b>
Inventory of Contents	3
Additional Equipment	4
Quick Setup	5-9
Detailed Setup Guide	
Battery Installation	10-12
Setting the Time Format	13
Setting the Temp. Format	13-14
Setting the Time	14-15
Features	
Minimum and Maximum Temperatures	16-17
Resetting Minimum and Maximum Temperatures	17
Adding additional remote temperature sensors (optional)	17-19
Viewing and operating multiple remote temperature sensors	20
Mounting	21-22
Troubleshooting	23-26
Maintenance and Care	26
Specifications	27-28
Warranty Information	28-31

# INVENTORY OF CONTENTS

1. The indoor temperature station (Figure 1)
2. The remote temperature sensor (TX6U) and mounting bracket. (Figure 2)
3. Mounting hardware.
4. Instruction Manual and Warranty Card.

Figure 1





Figure 2



## **ADDITIONAL EQUIPMENT**

(not included)

1. 1 Philips screwdriver.
2. 2 Fresh AAA 1.5V batteries.  
(for the indoor temperature station)
3. 2 Fresh AA 1.5V batteries.  
(for the temperature sensor)

## QUICK SETUP

**Hint: Use good quality Alkaline Batteries and avoid rechargeable batteries.**

1. Have the indoor temperature station and remote temperature sensor 3 to 5 feet apart.
2. Batteries should be out of all units for 10 minutes.
3. Place the batteries into the **remote temperature sensor** first, then into the **indoor temperature station**.  
(All remote temperature sensors must be started before the indoor weather stations)
4. **DO NOT PRESS ANY BUTTONS FOR 15 MINUTES.**

In this time the indoor temperature station and remote temperature sensor will start to talk to each other and the display will show both the indoor temperature and an outdoor temperature. If the indoor temperature station does not display both the indoor temperature and the outdoor temperature after the 15 minutes please retry the set up as shown on page five.

After both the indoor temperature and outdoor temperature are displayed for 15 minutes you can place your remote temperature sensor outdoors and set your time.

## **Notes on Outdoor Sensor Placement**

The remote temperature sensor should be placed in a dry, shaded area. Fog and mist will not harm your remote temp/humidity sensor but direct rain must be avoided.

The remote temperature sensor has a range of 80 feet. Any walls that the signal will have to pass through will reduce distance. An outdoor wall or window can have up to 30 feet of resistance and an interior wall can have up to 20 feet of resistance. Your distance plus resistance should not exceed 80 ft. in a straight line.

To complete the set up of your indoor temperature station after the 15 minutes have passed, please follow the steps below.

1. Press and hold the “*SET*” button for 5 seconds.

**Note:** A “12h” or “24h” will appear on the top line. (“12h” for AM/PM, “24h” for military time)

- a. To change between “12h” and “24h” press and release the “*RESET/+*” button.
  - b. When you have your choice shown on the display press and release the “*SET*” button once.
2. Degree Fahrenheit will now show.
    - a. To change between Fahrenheit and Celsius, press and release the “*RESET/+*” button.
    - b. When you have your choice shown on the display press



and release the “*SET*” button once.

3. An hour will now be flashing.
  - a. Press and release the “*RESET/+*” button until the correct hour is shown.

**Note:** When in the 12h mode “PM” is displayed in the upper left corner of the display between noon and midnight. During the AM hours this area will be blank.


- b. When the correct hour is shown, press and release the “*SET*” button once.
4. A minute will now be flashing.
  - a. Press and release the “*RESET/+*” button until the correct minutes are displayed.

**Press and release the SET button once more and you are done.**

# DETAILED SETUP GUIDE

## I. BATTERY INSTALLATION

### A. REMOTE TEMPERATURE SENSOR

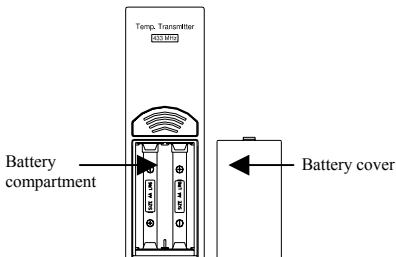

1. Remove the mounting bracket.
2. Remove battery cover.
3. Observing the correct polarity, install 2 AA batteries—make sure they do not spring free, or start-up problems may occur.
4. Replace cover.


## B. INDOOR TEMPERATURE STATION

**Note:** After the batteries are installed, **DO NOT** press any buttons for 15 minutes. This may interfere with the signals, causing temperatures to register incorrectly.

1. Remove the battery cover on the backside.

To do this, push up and pull out.

2. Observing the correct



Battery cover

Battery  
Compartment

- the correct polarity, install 2 AAA batteries.
3. Replace battery cover.
4. Wait 15 minutes or until both the indoor and outdoor temperatures are shown on the indoor temperature station.
5. The indoor temperature station should now show: “-:- -” in the TIME LCD,

indoor temperature in the INDOOR LCD and outdoor temperature in the OUTDOOR LCD.

## II. PROGRAMMING SEQUENCE

The programming sequence and default (factory) settings for the indoor temperature station is as follows:

1. Time Format (default 12h)
2. Temperature Format (default °F)
3. Time-Hour (default 12)
4. Time-Minute (default 00)

**Programming Note:** The instructions are arranged so that you can program each feature independently. If you would like to program the indoor temperature station completely at one time please disregard the first three steps of sections IV and V. When you get to the last steps in sections III and IV, proceed to step 4 in the next section without waiting 15 seconds for the display to return to the normal mode.

### III. SETTING THE TIME FORMAT

1. Press and hold the “*SET*” button for 5 seconds.
2. “12:h” will begin to flash.
3. Press and release the “*RESET/+*” button to select your desired time format.



4. Press and release the “*SET*” button to advance to the temperature format setting or wait 15 seconds for the display to return to the normal mode.

### IV. SETTING THE TEMPERATURE FORMAT

1. Press and hold the “*SET*” button for 5 seconds.
2. “12:h” will begin to flash.
3. Press and release the “*SET*” button.
4. “°F” will begin to flash.

5. Press and release the “*RESET/+*” button to select your desired temperature format.



6. Press and release the “*SET*” button to advance to the time setting or wait 15 seconds for the display to return to the normal mode.

## V. SETTING THE TIME

1. Press and hold the “*SET*” button for 5 seconds.
2. “12:h” will begin to flash.
3. Press and release the “*SET*” button twice.
4. The hour will begin to flash.
5. Press and release the “*RESET/+*” button to advance the hour to your desired hour.
6. Press and release the “*SET*” button to


- move to the minute setting.
7. The minutes will begin to flash.
  8. Press and release the “*RESET/+*” button to set the minutes.
  9. Press and release the “*SET*” button to advance to the time setting or wait 15 seconds for the display to return to the normal mode.

**Note:** There is “PM” displayed to the left of the hour when between noon and midnight. During the AM hours this area will be blank.


# FEATURES

## A. MINIMUM AND MAXIMUM TEMPERATURES

1. Press and release the “*MIN/MAX*” button, “MIN” appears above and to the right of each temperature and the recorded minimum temperatures are displayed along with the time of the recorded minimum outdoor temperature.



2. Press and release the “*MIN/MAX*” button to toggle to the maximum temperatures, “MAX” appears above and to the right of each





temperature and the recorded maximum temperatures are displayed along with the time of the recorded maximum outdoor temperature.

Please note that the flashing time is the time of the recorded outdoor temperature minimum or maximum.

## **B. RESETTING THE MINIMUM AND MAXIMUM TEMPERATURES**

To reset both the minimum and maximum temperatures—press and hold the “*MIN/MAX*” button for 5 seconds.

## **C. ADDING ADDITIONAL REMOTE TEMPERATURE SENSORS (OPTIONAL)**

The WS-7136U is able to receive signals from 3 different remote temperature sensors. Following are some brief instructions for the basic set-up of

additional remote sensor units with the WS-7136U. These extra sensors can be purchased through the same dealer as this unit, or by contacting La Crosse Technology directly. A TX6U will monitor temperature only, a TX3U will monitor temperature and display the temperature on its LCD, the TX3UP will monitor the temperature via a probe for use in pools, spas, etc.

**Note:** When setting up multiple units it is important to remove the batteries from all existing units in operation, then to insert batteries first into all the remote temperature sensor units, and in numeric sequence. Second, install batteries into the indoor temperature station. Transmission problems will arise if this is not done correctly and if the total time for set-up exceeds 6 minutes.

1. It is necessary to remove the batteries from all units currently in operation.
2. Remove the battery covers to all remote sensor units.
3. Place all remote sensor units in a numeric sequential order.
4. In sequential order, install batteries (follow the same battery installation procedures seen in section “I” of the Detailed Set-Up Guide) into the remote sensors.
5. Install batteries into the indoor temperature station.
6. Follow the Detailed Set-Up Guide for programming and operating instructions.

## D. VIEWING AND OPERATING WITH MULTIPLE REMOTE SENSOR UNITS

1. To view the temperature of a different remote sensor unit, press and release the “CH” button. A shift from one “boxed” number to the next should be observed in the OUTDOOR LCD.



2. To view the Minimum/Maximum temperature: first select from which remote temperature sensor to read data from (indicated by the “boxed” number). Pressing and releasing the “MIN/MAX” button will toggle through the minimum and maximum indoor temperature, and the minimum and maximum outdoor temperature.
3. To reset the Minimum/Maximum readings, press and hold the “MIN/MAX” button for five seconds.

## **MOUNTING**

**Note:** To achieve a true temperature reading, avoid mounting in direct sunlight. We recommend that you mount the remote temperature sensor on an outside North-facing wall. The sending range is 80ft; obstacles such as walls, concrete, and large metal objects will reduce the range. Place both units in their desired location temporarily to test reception capability before permanently mounting.

### **A. REMOTE TEMPERATURE SENSOR**

1. Remove the mounting bracket from the remote temperature sensor.
2. Mount using either screws or adhesive tape.
3. Reattach the remote temperature sensor to the mounting bracket.

## **B. THE TEMPERATURE STATION**

1. The indoor temperature station comes with the table stand already mounted. If you wish to use the table-stand, all that is required is to place the indoor weather station in your desired location.
2. To wall mount:
  - a) Remove the table stand by pulling down on the stand from the rear and rotating forward.
  - b) Fix a screw (not included) into the desired wall.
  - c) Place the indoor weather station onto the screw using the hanging hole on the backside.
  - d) Gently pull the indoor weather station down to lock the indoor weather station into place.

## **TROUBLESHOOTING**

**NOTE:** *For problems not solved, please contact La Crosse Technology via e-mail or phone, or visit our website, [www.lacrossetechnology.com](http://www.lacrossetechnology.com)*

**Problem:** The LCD is faint

**Solution:** Replace batteries

**Problem:** No outdoor temperature is displayed.

**Solution:**

- 1) First try to re-establish communication between the remote sensor and indoor temperature station by moving both units to within three to five feet of each other. Wait about ten minutes and then check for a temperature.
- 2) If this does not work please remove the batteries from both units and restart the system (please see Detailed Set-up on page nine through eleven).

**Note:** Please make sure when restarting the system that all batteries are fresh.

- 3) Once the system has been reset and you have a temperature reading from the sensor, temporarily place the remote temperature sensor in the previous location.

**Note:** If there is an outdoor temperature displayed when the two units are close together there was either too much distance between the two units previously or some type of interference that was causing poor reception.

- 4) If after 15 minutes the temperature is not displayed you will need to choose another location for placement of the temperature sensor.
- 5) The best way of doing this is to move the sensor 10 feet closer to the indoor temperature station.
- 6) After moving the remote temperature sensor please wait 15 minutes to give the indoor temperature station time to re-acquire the signal.



**Problem:** Temperatures do not match if units are placed next to each other.

**Solution:** Each temperature sensor is manufactured to be accurate to within 2 degree plus or minus and under normal conditions. It is possible for two temperature sensors to be as much as 4 degrees different. The difference can be exaggerated further because the temperature sensors are designed for different working environments. The indoor sensor is less responsive to ambient air currents because of the shielding effect of the indoor temperature station's case. In addition, the casing can act as a heat sink to absorb and store heat from external sources (i.e. handling of the case or radiant heat). In addition, the much greater range of the outdoor temperature sensor requires a different calibration curve than the indoor range. Error is usually greater at the extreme ends of a range, making it harder to compare different ranges with different curves. Under non-laboratory conditions, it is difficult to

compensate for the above factors and obtain an accurate comparison.

## **MAINTENANCE AND CARE INSTRUCTIONS**

- Extreme temperatures, vibration, and shock should be avoided to prevent damage to the units.
- Clean displays and units with a soft, damp cloth. Do not use solvents or scouring agents; they may mark the displays and casings.
- Do not submerge in water.
- Do not subject the units to unnecessary heat or cold by placing them in the oven or freezer.
- Opening the casings invalidates the warranty. Do not try to repair the unit. Contact La Crosse Technology for repairs.

## SPECIFICATIONS

Transmitting Frequency	433MHz
<b>Measuring Range - Temperature</b>	
Indoor Temperature Station: Indoor	32°F to 140°F with 0.1°F resolution.
Indoor Temperature Station: Outdoor	-21.8 °F to 156.2°F with 0.1°F resolution.
Temp accuracy	+/- 2°F
<b>Temperature Checking Interval</b>	
Indoor:	Every 10 seconds
Outdoor:	Three times in 10 minutes
Transmitting range:	Maximum 80 feet (25m) open space
<b>Batteries—(Alkaline recommended)</b>	
Remote Temperature Sensor	2 x AA, 1.5V

Indoor Temperature Station	2 x AAA, 1.5V
<b>Dimensions: (H x W x D)</b>	
Indoor Temperature Station	4.75" x 3.15" x 0.85" (excluding table stand) (120 x 80 x 21.8 mm)
Remote Temperature Sensor	5.04" x 1.57" x 0.9" (128 x 40 x 23 mm)
Battery life	Approximately 1 year

## **WARRANTY INFORMATION**

La Crosse Technology provides a 1-year warranty on this temperature station. Contact La Crosse Technology immediately upon discovery of any defects covered by this warranty.

Before sending the temperature station in for repairs, contact La Crosse Technology. The temperature station will be repaired or replaced with the same or similar model.

This warranty does not cover any defects resulting from improper use, unauthorized repairs, faulty batteries, or the temperature stations inability to receive a signal due to any source of interference.

LA CROSSE TECHNOLOGY WILL NOT ASSUME LIABILITY FOR INCIDENTAL, CONSEQUENTIAL, PUNITIVE, OR OTHER SIMILAR DAMAGES ASSOCIATED WITH THE OPERATION OR MALFUNCTION OF THIS TEMPERATURE STATION. THIS PRODUCT IS NOT TO BE USED FOR MEDICAL PURPOSES OR FOR PUBLIC INFORMATION. THIS PRODUCT IS NOT A TOY. KEEP OUT OF CHILDREN'S REACH.

This warranty gives you specific legal rights. You

may also have other rights specific to your State. Some States do not allow the exclusion of consequential or incidental damages therefore the above exclusion of limitation may not apply to you.

For warranty work, technical support, or information contact

La Crosse Technology  
190 Main Street  
La Crescent, MN 55947  
Phone: 507.895.7095  
Fax: 507.895.8000

e-mail:

[support@lacrossetechnology.com](mailto:support@lacrossetechnology.com)

(warranty work)

[sales@lacrossetechnology.com](mailto:sales@lacrossetechnology.com)

(information on other products)

web:

[www.lacrossetechnology.com](http://www.lacrossetechnology.com)

**FCC DISCLAIMER**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Freq. 433.92 MHz  
La Crosse Technology  
Made in China  
WS-7136U

**FCC ID: OMO-01RX (Receiver)**  
**OMO-01TX (Transmitter)**

081303

**All rights reserved. This handbook must not be reproduced in any form, even in excerpts, or duplicated or processed using electronic, mechanical or chemical procedures without written permission of the publisher.**

**This handbook may contain mistakes and printing errors. The information in this handbook is regularly checked and corrections made in the next issue. We accept no liability for technical mistakes or printing errors, or their consequences.**

**All trademarks and patents are acknowledged.**