


Thanks for purchasing a PowerTune Digital dash! Message us on Facebook or Instagram for support any time.

DO NOT POWER THE DASH FROM A CAR STEREO USB OR COMPUTER USB PORT. MIN 2.5 AMPS REQUIRED.

Your kit contains:

1x Powertune Digital Dash V5 dash
1x Data/power combo cable

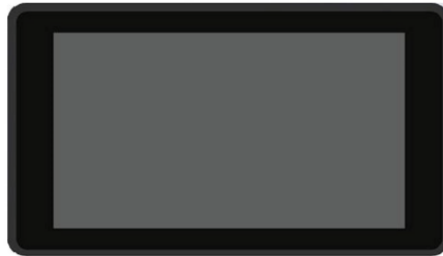

RED = 12V Power
BLACK = Ground
Blue = CAN L
White = CAN H

Your kit also may contain a GPS antenna (if ordered with GPS).

You no longer need to manually pin the colored the wires between the GPS antenna and the GPS module.

Simply screw the gold connector from the antenna into the gold connector on the dash and mount the antenna where it can see the sky (black side facing up), ideally on top of the cluster where it meets the windshield.

You no longer need to use an external power supply cable.

Step 1: Wire-in the power and ground for the power supply and connect the CAN H/L to the ECU.

The dash requires at least 2.5AMPS to power on safely, under powering may damage both the SD card and CPU. It is recommended to wire to the accessories power supply so the screen does not power cycle when the ignition switches between ON and START as you fire up the engine. A USB-C supply can also be used to power up the dash outside the vehicle.

Step 2: Scroll all the way to the right to reach the settings menu, press startup at the top right. In the ECU selection dropdown box, select the relevant ECU type and bitrate and press apply. Bitrate settings **MUST** be correct. See full manual for info.

Full guide/user manual available at powertunedigital.com -> select the “ User Manual” link in the top menu.

