



FEATURES

- 50 WATTS MAXIMUM OUTPUT POWER
- SINGLE OUTPUT UP TO 15A
- COMPACT 2.40 X 2.28 X 0.50 INCH PACKAGE
- HIGH EFFICIENCY UP TO 91%
- INPUT RANGE FROM 18VDC TO 36VDC AND 36VDC TO 75VDC
- FIXED SWITCHING FREQUENCY(300kHz)
- HALT TESTED
- INDUSTRY STANDARD FOOTPRINT
- ADJUSTABLE OUTPUT VOLTAGE
- NO MINIMUM LOAD REQUIRED
- UNDER-VOLTAGE LOCKOUT
- INPUT TO OUTPUT BASIC INSULATION:1600 VDC
- UL60950-1, EN60950-1, & IEC60950-1 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

OPTIONS

Positive logic remote on/off, pin length

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Distributed Power Architectures
Semiconductor Equipment

DESCRIPTION

HEC50 single output DC/DC converters provide up to 50 watts of output power in an industry standard half-brick package and footprint. These units are specifically designed to meet the power needs of low-voltage silicone. All models feature a wide input range, adjustable output voltage and a 15A current rating.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS	
Output power	50 Watts, max.
Voltage accuracy	± 1.5%
Minimum load	0%
Voltage adjustability (Note 5)	+ 10% , -20%
Line regulation	LL to HL at Full Load See table
Load regulation	No load to Full load See table
Remote sense (Note 5)	10% of Vout(nom)
Ripple and noise (Note 6) 20MHz bandwidth	100mVp-p
Temperature coefficient	±0.02% / °C, max.
Transient response recovery time 25% load step change	200µs
Over voltage protection threshold (Hiccup)	115% ~ 130% of Vout(nom)
Over current protection threshold	110% ~ 140% of Iout Rated
Short circuit protection	Continuous, automatics recovery
GENERAL SPECIFICATIONS	
Efficiency	See table
Isolation voltage	Input to Output 1600 VDC, min. 1minute Input(Output) to Case 1000 VDC, min. 1minute
Isolation resistance	500VDC 10 ⁷ ohms, min.
Isolation capacitance	2500pF, max.
Switching frequency	300kHz±10%
Safety approvals	IEC60950-1, UL60950-1, & EN60950-1
Case material	Open with Aluminum base-plate
Weight	50g (1.76oz)
MTBF (Note 1)	MIL-HDBK-217F 8.987 x 10 ⁵ hrs





INPUT SPECIFICATIONS		
Input voltage range	24VDC nominal input 48VDC nominal input	18 ~ 36VDC 36 ~ 75VDC
Input filter		L-C type
Input surge voltage	24VDC input 48VDC input	50VDC 100ms, max. 100VDC 100ms, max.
Start up time	Nominal input and constant resistive load	Power up 25ms Remote ON/OFF 25ms
Input reflected ripple current	24VDC input 48VDCinput	50mA p-p 20mA p-p
Start-up voltage	24VDC input 48VDC input	17VDC 34VDC
Shutdown voltage	24VDC input 48VDC input	15VDC 32VDC
Remote ON/OFF (Note 7) (Negative logic)	ON=Short or 0V < Vr < 1.2V, I _{IN} =1mA max. OFF=Open or 3V < Vr < 15V, I _{IN} =50µA max.	
(Positive logic)	ON=Open or 3V < Vr < 15V, I _{IN} =50µA max. OFF=Short or 0V < Vr < 1.2V, I _{IN} =1mA max.	
Input current of remote control pin	Nominal input	-0.5mA ~ 0.5mA
Remote off state input current	Nominal input	20mA
ENVIRONMENTAL SPECIFICATIONS		
Operating base-plate temperature range (Note 8)		-40°C ~ +100°C
Over temperature protection		110°C
Humidity max, Non-condensing		95%
Storage temperature range		-55°C ~ +125°C
Thermal shock		MIL-STD-810F
Vibration		MIL-STD-810F
EMC CHARACTERISTICS		
EMI (Note 9)	EN55022	Class A, Class B
Radiated immunity	EN61000-4-3	10 V/m Perf. Criteria A
Fast transient (Note 10)	EN61000-4-4	± 2kV Perf. Criteria B
Surge (Note 10)	EN61000-4-5	± 1kV Perf. Criteria B
Conducted immunity	EN61000-4-6	10 Vr.m.s Perf. Criteria A

Model Number	Input Range	Output Voltage	Output Current		Line regulation	Load regulation	No load ⁽³⁾ Input Current	Eff ⁽⁴⁾ (%)
			Min. load	Full load				
HEC50-24S1P8	18 ~ 36 VDC	1.8 VDC	0mA	15 A	4 mV	6 mV	120mA	86
HEC50-24S2P5	18 ~ 36 VDC	2.5 VDC	0mA	15 A	5 mV	8 mV	100mA	87
HEC50-24S3P3	18 ~ 36 VDC	3.3 VDC	0mA	15 A	7 mV	10 mV	120mA	89
HEC50-24S05	18 ~ 36 VDC	5 VDC	0mA	10 A	10 mV	15 mV	120mA	90
HEC50-24S15	18 ~ 36 VDC	15 VDC	0mA	3.3 A	30 mV	45 mV	190mA	89
HEC50-48S1P8	36 ~ 75 VDC	1.8 VDC	0mA	15 A	4 mV	6 mV	80mA	87
HEC50-48S2P5	36 ~ 75 VDC	2.5 VDC	0mA	15 A	5 mV	8 mV	80mA	88
HEC50-48S3P3	36 ~ 75 VDC	3.3 VDC	0mA	15 A	7 mV	10 mV	110mA	90
HEC50-48S05	36 ~ 75 VDC	5 VDC	0mA	10 A	10 mV	15 mV	90mA	91
HEC50-48S15	36 ~ 75 VDC	15 VDC	0mA	3.3 A	30 mV	45 mV	130mA	90


Note

- MIL-HDBK-217F @Ta=25 °C, Full load.
- The converter is provided by basic insulation.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Maximum output deviation is 10% inclusive of remote sense. If remote sense is not being used, the + SENSE should be connected to its corresponding +OUTPUT and likewise the -SENSE should be connected to its corresponding -OUTPUT.
- Measured with a 1µF M/C and a 10µF T/C.
- The negative/ positive logic and pin length are optional (see table). The pin voltage is referenced to -INPUT
- Heat-sink is optional and P/N: 7G-0021A-F, 7G-0022A-F, 7G-0023A-F, 7G-0024A-F.
- The HEC50 series standard module meets EN55022 Class A and Class B with external components.
For more detail information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V.
- CASE GROUNDING : When connect the case pin and four screw bolts to shield plane, the EMI could be reduced.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

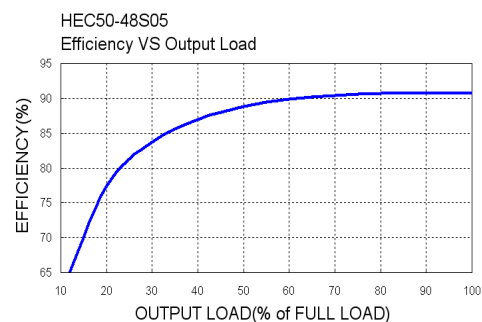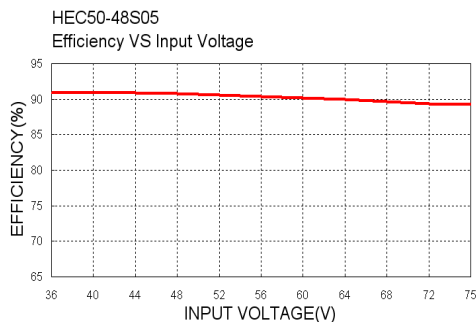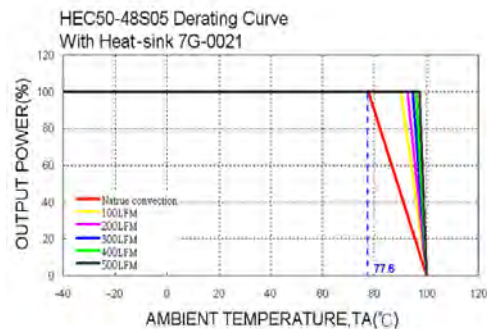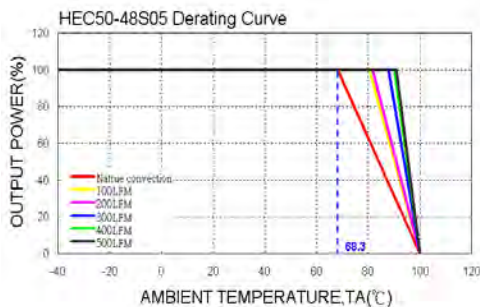


MECHANICAL DRAWING :

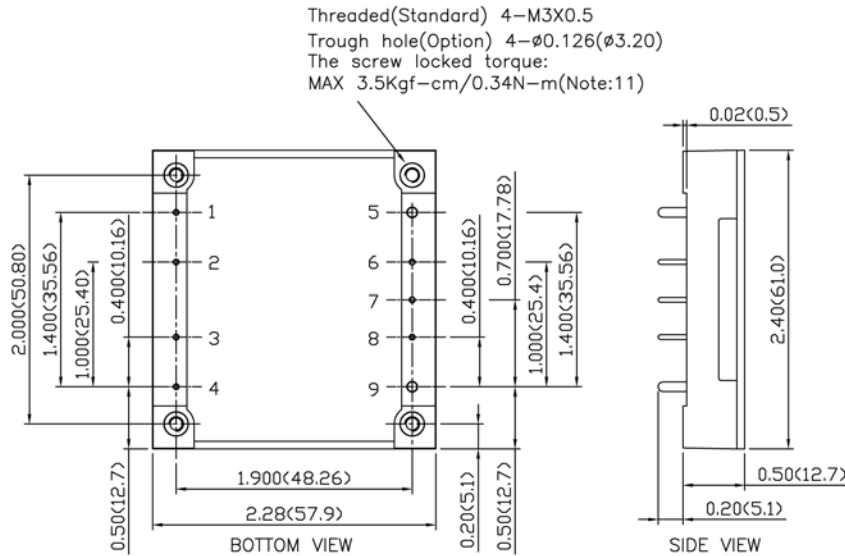

1. All dimensions in Inch (mm)
Tolerance: X.XX \pm 0.02 (X.X \pm 0.5)
X.XXX \pm 0.01 (X.XX \pm 0.25)
2. Pin pitch tolerance \pm 0.01 (0.25)
3. Pin dimension tolerance \pm 0.004 (0.1)

PIN CONNECTION		
PIN	DEFINE	DIAMETER
1	-INPUT	0.040 Inch (1.02mm)
2	CASE	0.040 Inch (1.02mm)
3	CTRL	0.040 Inch (1.02mm)
4	+INPUT	0.040 Inch (1.02mm)
5	-OUTPUT	0.080 Inch (2.03mm)
6	-SENSE	0.040 Inch (1.02mm)
7	TRIM	0.040 Inch (1.02mm)
8	+SENSE	0.040 Inch (1.02mm)
9	+OUTPUT	0.080 Inch (2.03mm)

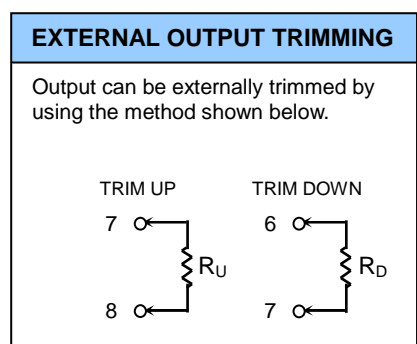

Remote On/Off and Pin Options	Suffix
Negative remote ON/OFF logic, 0.200" pin length (standard)	-
Negative remote ON/OFF logic, 0.145" pin length	-L
Positive remote ON/OFF logic, 0.200" pin length	-P
Positive remote ON/OFF logic, 0.145" pin length	-S

Heat-Sink and Mounting Hole Tread Options	Suffix
Without heat-sink	-
7G-0021A-F	-HS
7G-0022A-F	-HS1
7G-0023A-F	-HS2
7G-0024A-F	-HS3
Through hole (No thread)	-TH

Example : HEC50-48S3P3-PHS
* The module can't equip heat-sink with TH option.